


R-OverHeadR

R-OverHeadR is a UHF phased array RFID smart gate system designed for real-time retail merchandise monitoring, anti-theft protection and store management integration.

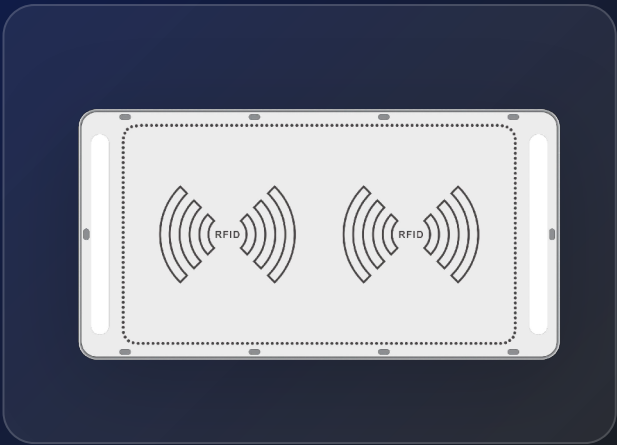

RF SPECIFICATION

Identification Method	UHF
RF Chip	Impinj R2000
Frequency Range	840MHz-960MHz adjustable
Protocol	PC C1G2, ISO 18000-6B, ISO 18000-6C
Frequency Band (Optional)	840MHz-960MHz (Adjustable)
Read Distance	0-5M
Function	RFID read function, multiple label identification, label data filtering, quantity statistics, spatially induced triggering, RSSI perception, EAS alarm

HARDWARE SPECIFICATION

RF Output Power (port)	33dBm +/- 1dBm (MAX)
Tag recognition speed	>500 times/second
Beam Scanning Interval	5 degrees
Coverage Angle	90 degrees (Horizontal) / 120 degrees (Vertical)
Beamforming Time	5 microseconds
Alarm Type	Sound & Light

BASIC SPECIFICATION

Material	Carbon steel plate
Power Supply	DC12V/5A
Humidity	5%-95% (Non-Condensing)
Operat Temperature	-20 deg C ~ 60 deg C
Size	350mm x 670mm x 168mm


FEATURE HIGHLIGHTS

- Strong group reading capability with reading distance up to 5 m
- 0.3 second reading speed for high-traffic retail environments
- 840-960 MHz UHF RFID technology with protocol extension support
- Multiple interfaces including RJ45, RS232, WiFi, 4G and alarm input
- Integrated audible and visual alarm with online/offline EAS alarm support
- 120 degree phased array tracking with 9 adaptive beams
- Customizable product appearance, functions and protocols

PRODUCT GROUP

Category	RFID Smart Gate System
Product Group	RFID Gate Product

DIMENSION

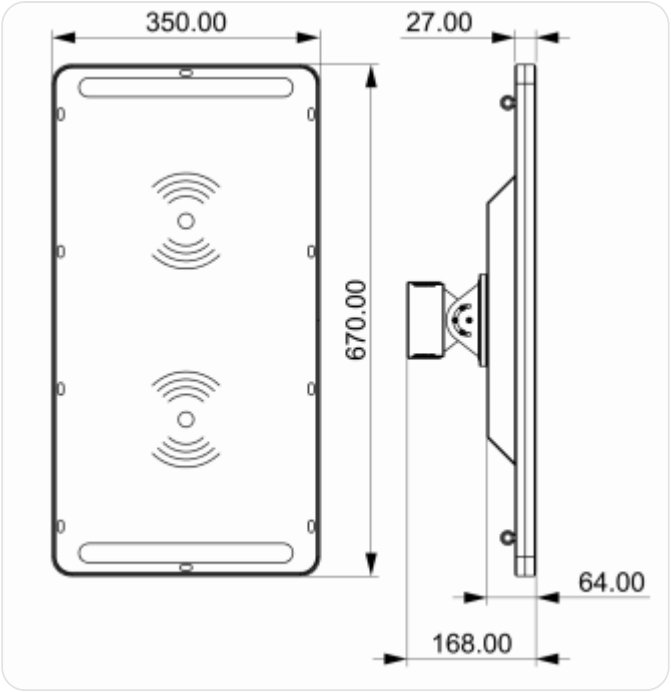

Unit : mm (inch)