

R-ShieldedBox

R-ShieldedBox is a desktop UHF RFID workstation for library, unmanned retail and service environments that require item reading, writing, registration and self-service workflows.



RF SPECIFICATION

Identification Method	UHF
RF Chip	Impinj R2000
Frequency Range	840MHz-960MHz
Protocol	EPC C1G2, ISO 18000-6C, ISO 18000-6B
Frequency Band (Optional)	ETSI: 865-868MHz, JP: 916.8-920.4MHz, TW: 922.25-927.75MHz, ID: 923.125-925.125MHz, RUS: 866.6-867.4MHz, TEST: 802.75-998.75MHz, JP_LBT: 916.8-920.8MHz
RFID Item Reader	15 pcs (depends on item size)
Function	RFID read & write, multiple label identification, label data filtering, quantity statistics, RSSI perception, self-service card application

HARDWARE SPECIFICATION

System	Windows / Android (optional)
Hardware	I5 CPU, 4G RAM, 128G ROM; RK3399 CPU, 4G RAM, 16G ROM (optional)
Display	1920 x 1080, 22-inch dual capacitive touch screen
Communication	RJ45 10/100Mbps
Other Interface	2xUSB 2.0

FUNCTION SELECTION

RFID Card Reader	Standard
RFID Card Write	Standard
Bar Code	Standard
QR Code	Standard
Fingerprint Recognition	Optional
Face Recognition	Standard
Sound Light Alarm	Optional
Keyboard	Optional
Solar Energy	Optional
Wireless Network	WiFi / 4G

BASIC SPECIFICATION

Material	Carbon steel plate
Power Supply	AC 110-220V 50Hz 50W
Working Humidity	10%RH-90%RH
Operat Temperature	0 deg C ~ 60 deg C
Size	80 x 70 x 95 cm
Weight	about 50kg

FEATURE HIGHLIGHTS

- 21.5-inch capacitive touch screen with 1920 x 1080 resolution
- 840-960 MHz UHF RFID technology with protocol extension support
- RJ45 communication interface
- Supports permission settings and function expansion
- Supports card information registration
- RFID read and write workflows for self-service applications


PRODUCT GROUP

Category	UHF RFID Workstation
Product Group	RFID Gate Product

PRODUCT VIEWS



DIMENSION

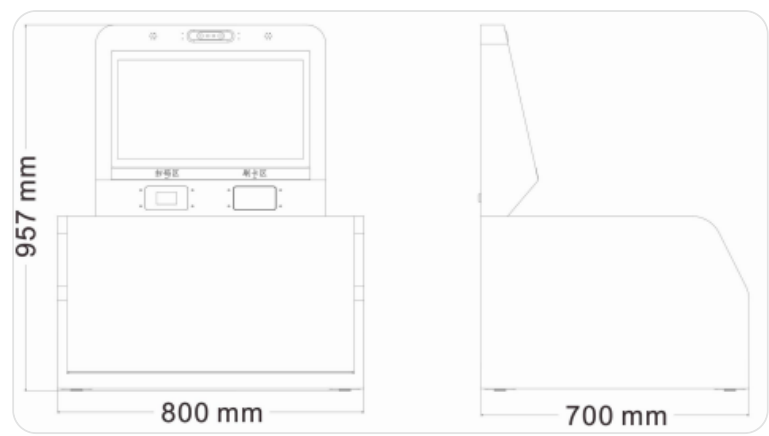

Unit : mm (inch)
Weight : about 50kg