


Avery Dennison AD-164 U9 UHF RFID Inlay

Slender 60 × 4 mm Gen2 UHF RFID inlay powered by NXP UCODE 9 with Direct Chip Attach. Achieves up to 7 m read distance on high-dielectric materials. Upgraded from UCODE 8 with improved read/write sensitivity and faster encoding speed.

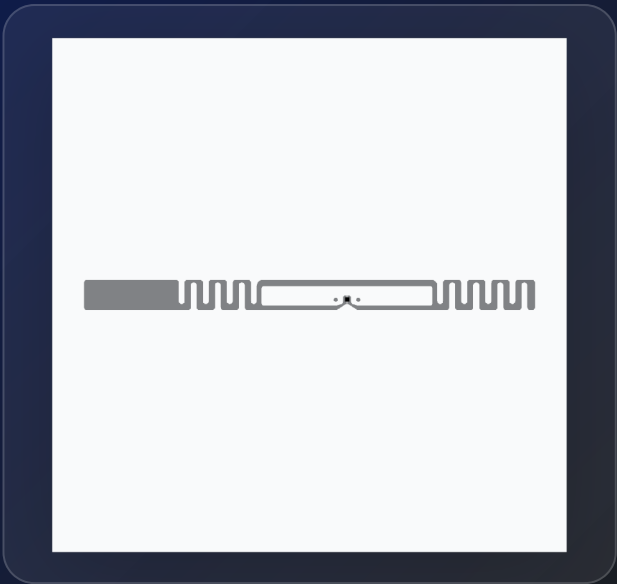

RFID SPECIFICATION

Chip	NXP UCODE 9
IC Attachment Technology	Direct Chip Attach
Standard	ISO/IEC 18000-63 Type C
Frequency Band	UHF 860–960 MHz
EPC Memory	96-bit
TID Memory	96-bit / 48-bit unique serial number
On-Metal	Non metal
Certificate	ARC (RFID Lab, Auburn University)
RoHS	EU Directive 2011/65/EU and 2015/863 Compliant

PHYSICAL SPECIFICATION

Antenna Dimensions	60 × 4 mm / 2.362 × 0.157 in
Die-Cut Dimension	64 × 6 mm / 2.520 × 0.236 in
Dry Inlay (3008611 / IL-604464)	38um PET — 20,000 pcs/reel — MAX OD 15.5"
Wet Inlay (3008613 / IL-604466)	38um PET — 10,000 pcs/reel — MAX OD 13"
Label (3008612 / IL-604465)	38um PET + BW0053 face sheet — 5,000 pcs/reel — MAX OD 8"
Web Width	70.35–70.36 mm / 2.770 in
Core Size	76 mm / 3 in
Operating Temperature	-40°C to +85°C

FEATURE HIGHLIGHTS

- NXP UCODE 9 with Direct Chip Attach and Self Adjust feature
- 96-bit EPC memory – improved sensitivity vs. UCODE 8
- Up to 7 m read distance on glass, plastics and near-liquid
- Slender 60 × 4 mm antenna – die-cut 64 × 6 mm
- Available in dry inlay, wet inlay and label formats
- ARC accredited – ISO 9001:2015 and ISO 14001:2015 certified
- RoHS compliant – EU Directive 2011/65/EU and 2015/863

PRODUCT GROUP

Category	UHF RFID Inlay
Product Group	RFID Label / Inlay