


Omni-ID Fit 220 HT

The smallest regional UHF RFID tag capable of surviving cycling to +235°C. At just 6.8×6.8 mm, the Fit 220 HT tracks very small metal assets including hand tools, IT assets and medical instruments.

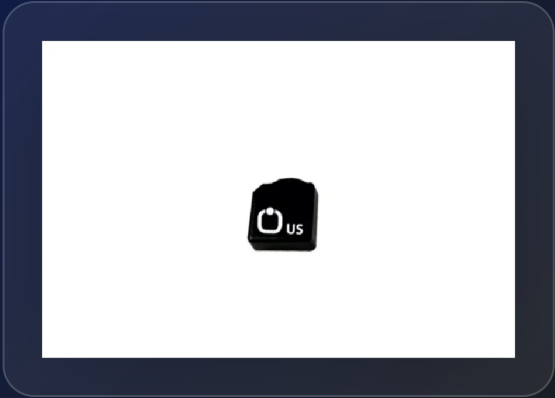

RF SPECIFICATION

Radio Protocol	EPC Class 1 Gen2v2
Frequency Range – EU	866–868 MHz
Frequency Range – US	902–928 MHz
IC Type (Chip)	Alien Higgs 3
EPC Memory	96 bits
User Memory	512 bits
Unique TID	64 bits
Read Range – Fixed Reader	Up to 2.2 m / 7.2 ft
Read Range – Handheld Reader	Up to 1.4 m / 4.6 ft
Material Compatibility	Metal

PHYSICAL SPECIFICATION

Size	6.8 × 6.8 × 2.7 mm (without IC bump)
Material	Painted Black
Weight	0.6 g
Attachment	Film Adhesive (included)

ENVIRONMENTAL SPECIFICATION

Operating Temperature	-20°C to +85°C
Max Temperature Exposure	-20°C to +235°C
IP Rating	IP68
Shock & Vibration	MIL-STD-810 G
Certifications	CE, RoHS, Ex; optional ATEX/IECEX, US&Canada C1D1/D2

FEATURE HIGHLIGHTS

- Alien Higgs 3 – EPC Class 1 Gen2v2, EU/US dual frequency
- Smallest high-temp tag: 6.8×6.8×2.7 mm, 0.6 g
- Survives cycling to +235°C – IP68, MIL-STD-810 G

PRODUCT GROUP

Category	UHF RFID High Temperature Tag
Product Group	RFID Label / Tag