


Xerafy METAL-SKIN-MERCURY-95-MAX

Xerafy METAL-SKIN-MERCURY-95-MAX is an industrial RFID tag with read range Up to 36.09 ft (11 m) on metal Up to 31.50 ft (9.60 m) off metal, IP68 protection.

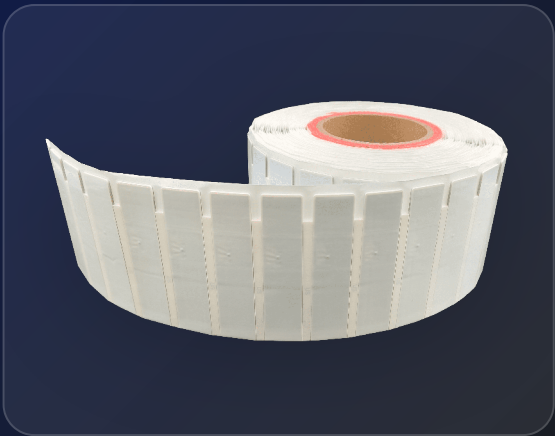

RFID SPECIFICATION

Protocol	150/IEC 18000-6C (EPC Gen2)
Operating Frequency	902-928 MHz (US); 865-868 MHz (EU)
Chip	NXP UCODE 8
Memory	128 bits EPC; 96 bits TID
Write Cycles	100,000 times
Data Retention	20 years
Read Range (Fixed)	Up to 36.09 ft (11 m) on metal Up to 31.50 ft (9.60 m) off metal
Polarization	Linear

PHYSICAL SPECIFICATION

Material	White thermal transfer face stock
Dimensions (mm)	95 x 22 x 1.25
Dimensions (in)	3.74 x 0.87 x 0.04
Weight	2.20 lbs (1 kg)
Packing Information	500pcs/roll

ENVIRONMENTAL RESISTANCE

Operating Temperature	-40°C to +85°C -40°F to +185°F
Survival Temperature	-40°C to +85°C -40°F to +185°F
IP Rating	IP68
Vibration	MIL-STD-810G
Storage Humidity	50±15%RH
Printer Compatibility	SATO CL4NX,
Warranty	1 year

APPLICATIONS

Applications	Actual read range may vary based upon use case and antenna power.
--------------	---

FEATURE HIGHLIGHTS

- Up to 36.09 ft (11 m) on metal Up to 31.50 ft (9.60 m) off metal
- IP68
- 40°C to +85°C -40°F to +185°F

PRODUCT GROUP

Category	UHF RFID On-Metal Label
Product Group	RFID Label / Tag