

Hopeland CL7206B5A RFID Reader

The Hopeland CL7206B5A is an integrated, all-weather UHF RFID reader powered by the Impinj Indy R2000 chipset. With a 9 dBi built-in circular antenna, IP65 aluminum waterproof housing, and multiple communication interfaces (RJ45, RS-232, RS-485, Wiegand), it is widely used in e-parking, garbage trucks, AGVs, and access control.



HARDWARE, OS AND FIRMWARE

Processor	ARM9, 400MHz
Memory	Flash 128MB; DRAM 32 MB
Operating System	Linux 2.6
Firmware Upgrade	Demo software / Telnet
API Support	Windows – .NET, C++ and Java SDK; Android - Java; Linux – C and Java SDK

RFID CHARACTERISTICS

Air Protocols	ISO/IEC 18000-6B, 6C / EPC C1Gen2
Chipset	Impinj Indy R2000
Frequency	USA: 902-928 MHz (FCC part 15); EU: 865-868 MHz (ETSI EN 302208); CN: 920-925 MHz (CMIIT)
Built-in antenna	Circular 9 dBi, VSWR ≤ 1.2:1
Output Power	0 dBm-30 dBm (±1 dBm) adjustable
Channel bandwidth	< 200 KHz
Reading Distance	0-15 m (according to tag & environment)
Anti-collision	RSSI / multi-tag / intensive inventory supportable
Work Mode	Fixed / hop frequency optional

CONNECTIVITY

Communications	RJ45, RS-232, RS-485, Wiegand
General Purpose I/O	1 optocoupler input, 1 pair 5V output or Wiegand output
Power supply	DC 24V/2.5A (DC 9V ~ 30V, 30W)

PHYSICAL CHARACTERISTICS

Dimensions	290 mm x 290 mm x 55 mm
Weight	1.6 kg
Housing Material	Aluminum plate / ABS cover

ENVIRONMENTAL

Operating Temp.	-20 to +70 °C
Storage Temp.	-40 to +85 °C
Humidity	5-90% non-condensing (+25 °C)
Sealing	IP65


FEATURE HIGHLIGHTS

- Powered by Impinj Indy R2000 chipset for maximum tag detection
- Aluminum casting / waterproof housing for all-weather industrial scenarios
- Various communication / software interfaces
- Different developing languages SDK (Windows, Android, Linux)
- Excellent communication protocol architecture
- Integrated design supports better deploy / installation / engineering / wiring
- Seamlessly compatible with RFID middleware
- Widely used in E-parking, garbage truck, AGV, access control

PRODUCT GROUP

Category	RFID Reader
Product Group	Fixed UHF RFID Reader

CONSTRUCTION APPEARANCE

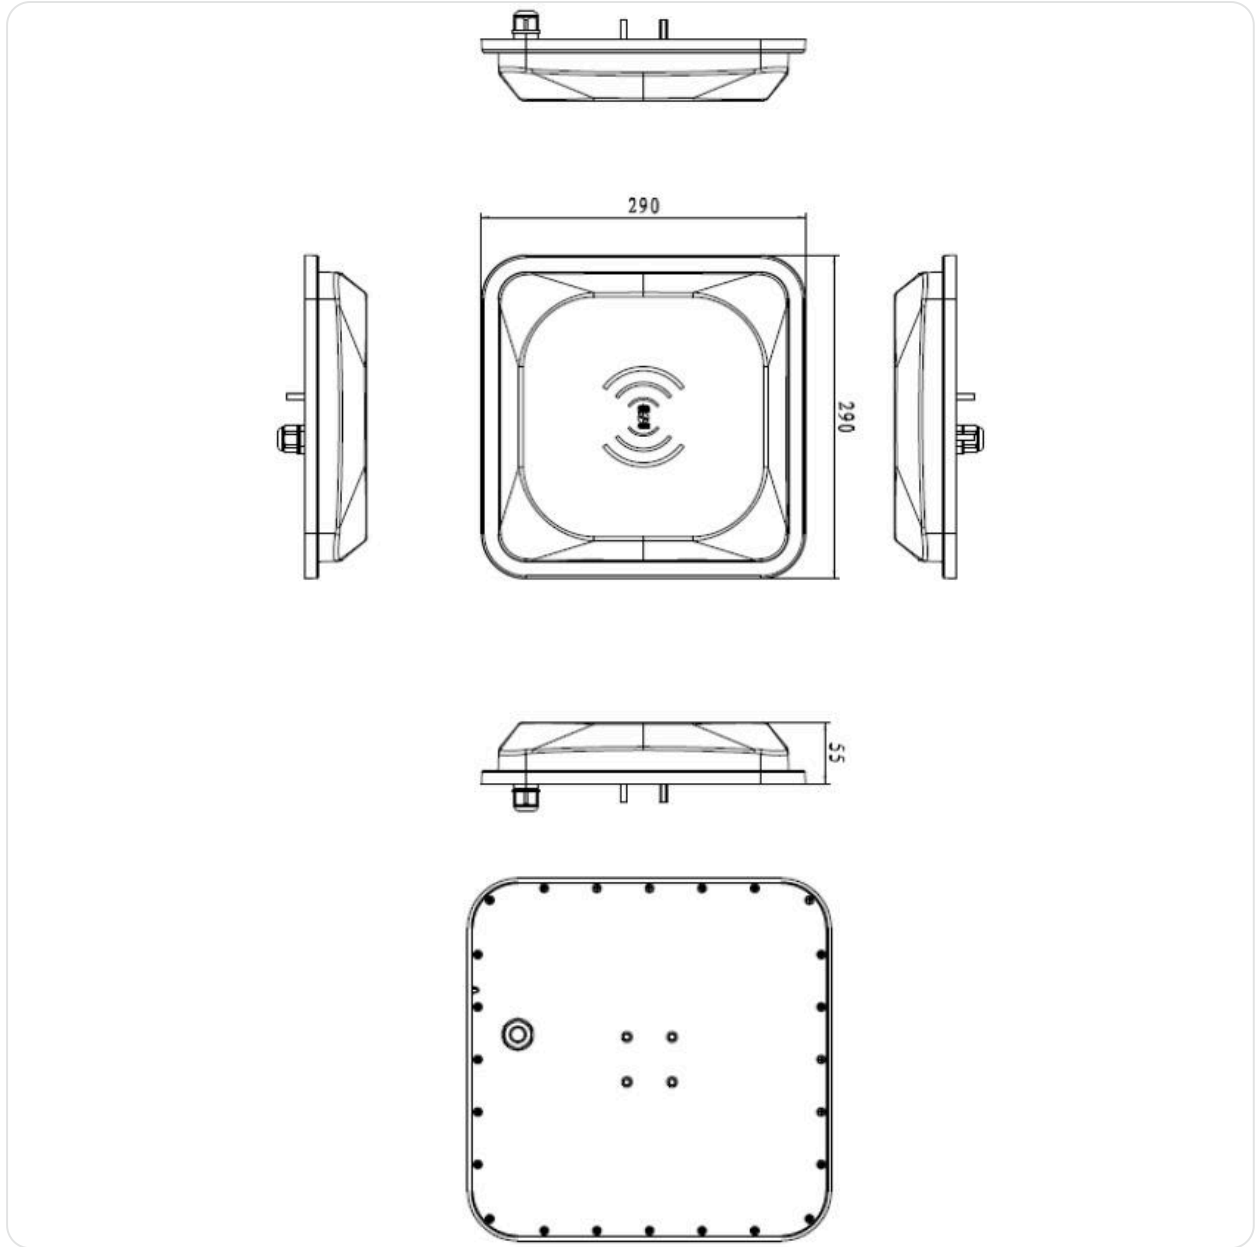

Unit: mm

Dimensions: 290 × 290 × 55 mm