

Hopeland Shine 340

The Hopeland Shine 340 (HH340) is an IoT smart UHF RFID reader powered by the Impinj R2000 chipset and running Android 9.0. With 4-port output, 2 GB RAM / 16 GB ROM, off-line working for 40,000 tags, and rich connectivity (WiFi, Bluetooth, 4G, USB, RJ45, RS232, I/O, HDMI), it brings cloud-ready intelligence to industrial deployments.



HARDWARE, OS AND FIRMWARE

Processor	MT6765, Octa-Core 2.3 GHz
Memory	Flash 16 GB; DRAM 2 GB
Operating System	Android 9.0
Firmware Upgrade	Demo software / Web
API Support	Windows – .Net / .Net core / C++ / Java SDK; Android - Java; Linux – Java SDK

PHYSICAL CHARACTERISTICS

Dimensions	241 mm x 132 mm x 36 mm
Weight	1.2 kg
Housing Material	Die-cast aluminum
Visual Status Indicators	Power/Status, Ant 1-4/8

RFID CHARACTERISTICS

Air Protocols	ISO/IEC 18000-6B, 6C / EPC C1Gen2 (C2GEN2 optional)
Frequency	CHN: 920-925 MHz (CMII); USA: 902-928 MHz (FCC part 15); EU: 865-868 MHz (ETSI EN 302208)
Output Power	0 dBm-35 dBm (±1 dBm) adjustable
Channel bandwidth	< 200 KHz
Anti-collision	Support multi-tag / intensive inventory
Work Mode	Fixed / hop frequency optional

CONNECTIVITY

Communications	RJ45, RS-485, OTG, Wiegand
WiFi	802.11 a/b/g/n/ac
4G	LTE-FDD (CAT-7) / LTE-TDD (CAT-7) / WCDMA / TD-SCDMA / EVDO / CDMA / GSM
Bluetooth	BT v2.1+EDR, 3.0+HS, v4.1+HS
General Purpose I/O	4 inputs (DC 0-24V), 4 outputs (DC max 30V, 2A; AC max 125V, 0.3A), opto-isolated
Power supply	DC 24V/2.5A or POE (IEEE 802.3 af/at/bt)
Display interface	HDMI, 720P(default)/1080P
Antenna Ports	4/8 Reverse Polarity TNC ports; circular or linear polarization

ENVIRONMENTAL

Operating Temp.	-20 to +70 °C
Storage Temp.	-40 to +85 °C
Humidity	5-90% non-condensing
Sealing	IP53


FEATURE HIGHLIGHTS

- Powered by Impinj R2000 chipset for maximum tag detection
- Android OS based open development environment
- MQTT support for real-time cloud messaging
- HTTP POST communication to send tag data to URL
- Direct database push of tag data
- RJ45, RS485, Wiegand, USB, Bluetooth, 4G connectivity
- Industrial, installation-friendly I/O connector
- RSSI, antenna detection, online update
- RSSI & speed filters

PRODUCT GROUP

Category	RFID Reader
Product Group	IoT Smart UHF RFID Reader

OUTLINE DIMENSIONS

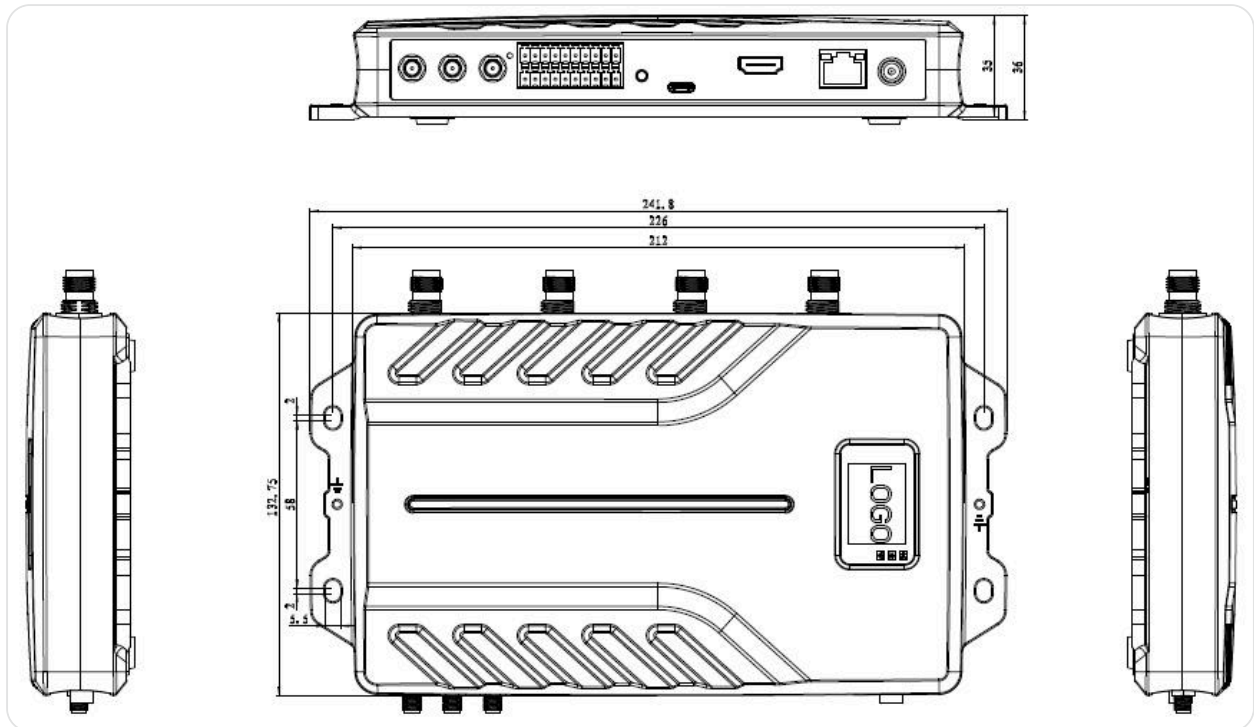

Unit: mm

Dimensions: 241.8 × 132 × 36 mm