


Nordic ID Sampo S1

Nordic ID Sampo S1 is a fixed UHF RFID reader with an integrated antenna in a flat design. Powered via USB, it serves point-of-sales, document tracking, access control, and smart shelf applications with three external antenna ports for expanded coverage.

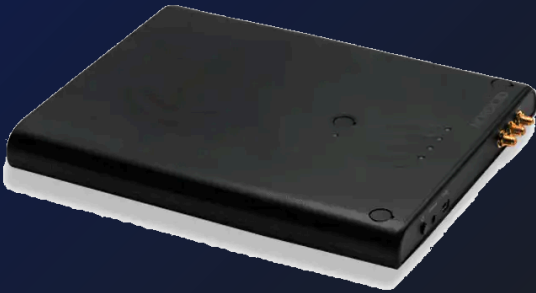

UHF RFID

Supported standard	ISO 18000-63 (EPC Class 1 Gen2v2), AES authentication ISO/IEC 29167-10
Frequency band	ETSI 865.6–867.6 MHz or FCC/IC 902–928 MHz
Regulatory	CE ETSI EN 302 208, CE ETSI EN 301 489, FCC part 15.247 IC RSS-210, Safety IEC 62368-1:2019 ed. 3
Typical reading speed	200 tags / sec in DRM mode
RFID radiated power	+30dBm (1 W) ERP, adjustable in 1 dB steps. External antenna ports (optional): +27dBm (500 mW)
Integrated antenna features	8 dBiC circular polarized, Beam width: 80°, Nominal reading distance: 5 m
External antenna port (optional)	3 pcs. 50 Ω / SMA Female

USER INTERFACE

Signals and indicators	LEDs: Power, RFID on, RFID read and Communication; Buzzer for sound indications; Light sensor and tapping sensor for triggering
------------------------	---

CONNECTIVITY

USB	Bus powered USB 2.0 device (appears as a serial port)
-----	---

POWER

External Power Supply	USB or 240/110V AC/DC adapter
Operating Power	3 W

SIZE AND WEIGHT

Dimensions	(W) 200 x (L) 260 x (H) 25 mm
Weight	540 g / 19.0 oz

ENVIRONMENT

Operating Temperature	-20 to 55 °C
Storage Temperature	-40 to 85 °C
Environmental sealing	IP20, for indoor use only

FEATURE HIGHLIGHTS

- Long-range and accurate RFID reading
- GPIO connector
- Three external antenna ports
- Power over USB or external power supply

PRODUCT GROUP

Category	RFID Reader
Product Group	Fixed UHF RFID Reader