


Xerafy XPLORED-SURFACE

Xerafy XPLORED-SURFACE is an industrial RFID tag with read range Up to 4.92 ft (1.50 m), IP68, IP69K protection.

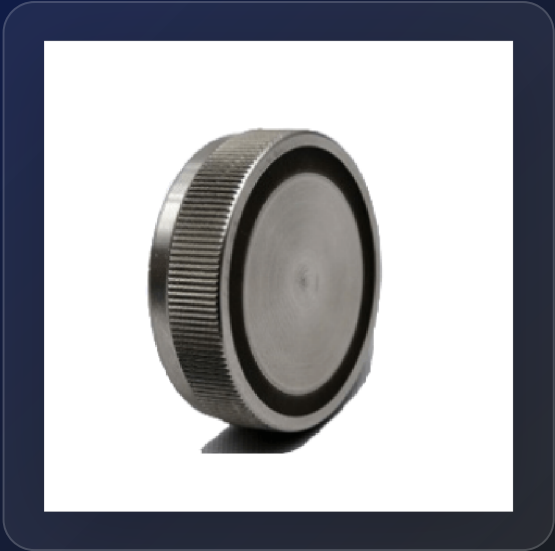

RFID SPECIFICATION

Protocol	EPC global Class 1 Gen 2
Operating Frequency	902-928 MHz (US); 865-868 MHz (EU)
Chip	1 Alien Higgs 3
Memory	96/480 bits EPC; 96 bits TID; 512 bits user memory
Read Range (Fixed)	Up to 4.92 ft (1.50 m)
Read Range (Handheld)	Up to 3.28 ft (1 m)
Polarization	Linear

PHYSICAL SPECIFICATION

Material	Stainless steel 316L, High performance engineered polymer
Dimensions (mm)	ø 28.30 x 8.50
Dimensions (in)	ø 1.11 x 0.33
Weight	0.89 oz (25.40 g)

ENVIRONMENTAL RESISTANCE

Operating Temperature	-40°C to +85°C -40°F to +185°F
Survival Temperature	-50°C to +250°C -58°F to +482°F
Chemical Resistance	3 Withstand drilling fluids and hydraulic fluids including hydrogen sulphide.
IP Rating	IP68, IP69K
Shock	3 ft (1 m) to concrete/granite
Vibration	MIL-STD-810G
Warranty	1 year

APPLICATIONS

Applications	The chemical resistance is based on the concentration of solutions and application environment.Please contact Xerafy for further details on, Withstand drilling fluids and, hydraulic fluids including hydrogen, sulphide.
--------------	--

FEATURE HIGHLIGHTS

- Up to 4.92 ft (1.50 m)
- IP68, IP69K
- -40°C to +85°C -40°F to +185°F

PRODUCT GROUP

Category	UHF RFID On-Metal Tag
Product Group	RFID Label / Tag