

## R-WideTunnel

R-WideTunnel is a UHF RFID conveyor tunnel reader designed for high-volume item counting, incoming and outgoing goods review and automated inventory workflows.



### TECHNICAL SPECIFICATION

|                              |                                           |
|------------------------------|-------------------------------------------|
| OS                           | Windows (Android optional)                |
| Industrial Personal Computer | I5, 4G+128; RK3399, 4G+16G                |
| Identification Technology    | RFID (UHF)                                |
| Reading Speed                | 100pcs/s                                  |
| Transmission Speed           | Default 20m/min, adjustable up to 30m/min |
| Maximum Load                 | 80kg                                      |
| Box Reading Speed            | 6-10 box/min                              |
| Conveyor Belt                | 3 independent part                        |
| Door Opening Speed           | 1.2s                                      |

UHF RFID

|                      |                                     |
|----------------------|-------------------------------------|
| Frequency Range      | 840MHz-960MHz                       |
| Protocol             | ISO 18000-6C (EPC C1 G2)            |
| RFID Chip            | Impinj R2000                        |
| RFID Frequency Mode  | Fixed frequency / frequency hopping |
| Output Power         | 33dbm +/- 1dBm                      |
| Tag Reading Quantity | >=800 pcs                           |
| Read Rate            | 3-5s                                |
| Read Mode            | Static                              |
| Working Mode         | Cycle / trigger                     |

PHYSICAL SPECIFICATIONS

|                  |                          |
|------------------|--------------------------|
| Material         | 1.2mm thick carbon steel |
| Screen           | 10-inch touch screen     |
| Dimension        | 1025mm*1875mm*4022mm     |
| Carton Dimension | 900*700*550mm            |

POWER SUPPLY

|                 |                                        |
|-----------------|----------------------------------------|
| Working Power   | Maximum power 250W, standby power 120W |
| Working Voltage | AC 220V                                |

OPERATING ENVIRONMENT

|                     |                      |
|---------------------|----------------------|
| Storage Temperature | -20 deg C - 60 deg C |
| Working Temperature | -20 deg C - 60 deg C |



FEATURE HIGHLIGHTS

- Identifies more than 400 items within 3 seconds
- Real-time list generation on the display screen
- Professional motion control and mechanical design
- Electromagnetic shielding and RF optimization for accurate reading
- Three independent conveyor belt sections
- Supports abnormal sorting module expansion


PRODUCT GROUP

|               |                            |
|---------------|----------------------------|
| Category      | UHF Conveyor Tunnel Reader |
| Product Group | RFID Gate Product          |


PRODUCT VIEWS

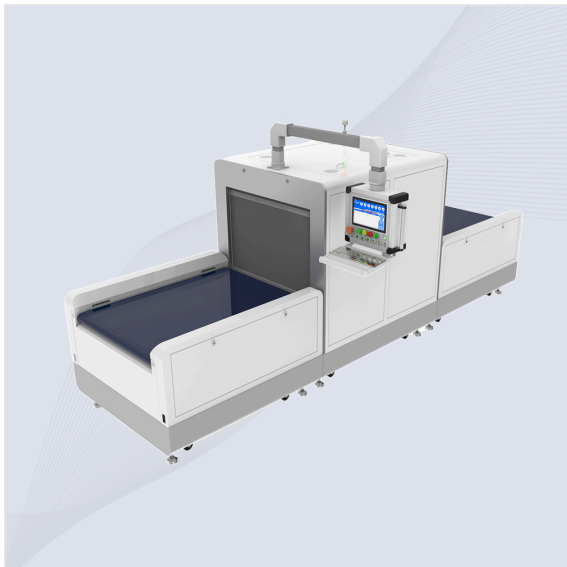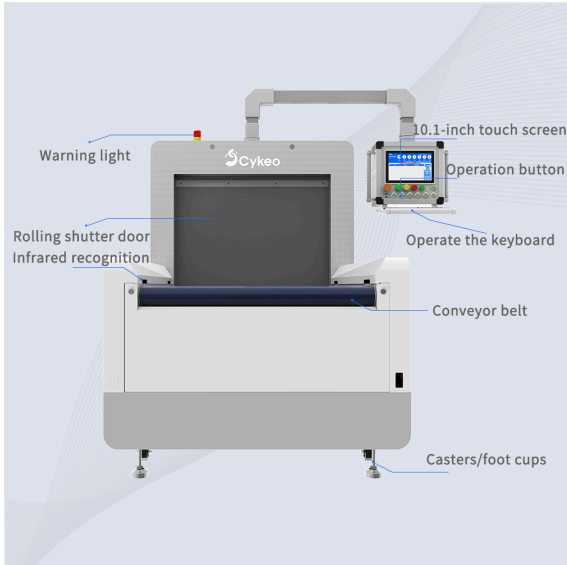

PRODUCT VIEWS

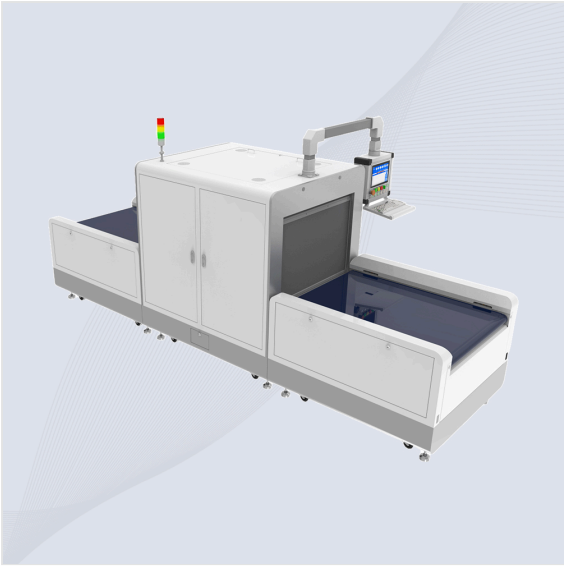


DIMENSION

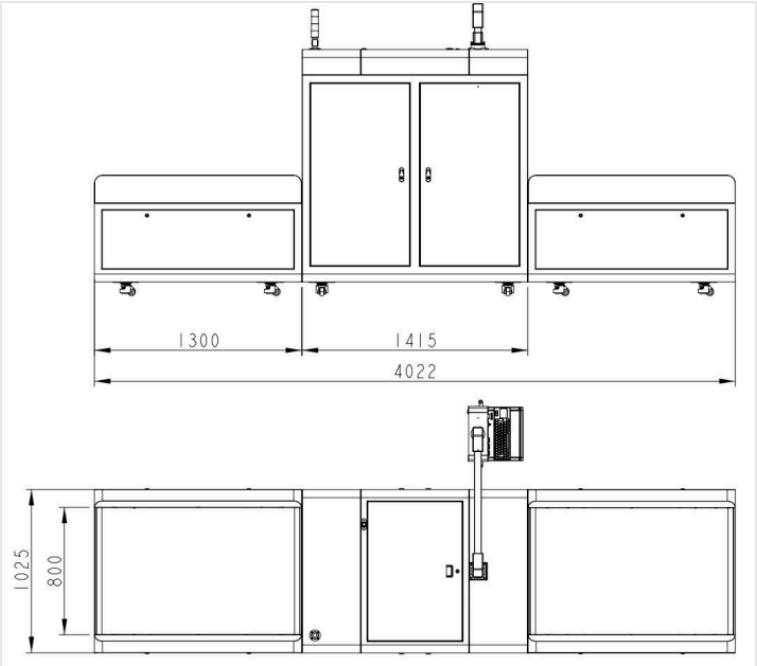

Unit : mm (inch)

DIMENSION

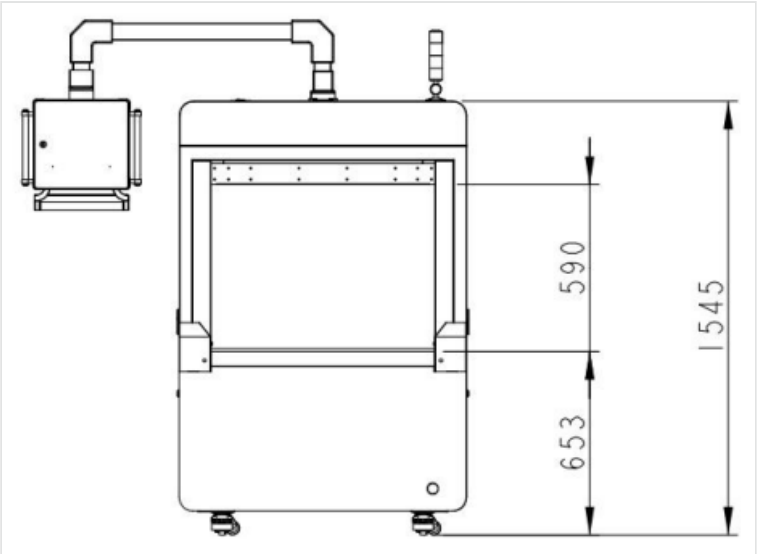

Unit : mm (inch)