


CAEN RFID skID (R1280I)

The skID is a portable RAIN RFID reader from the easy2read product line with an integrated antenna for medium-range applications. With Bluetooth (BLE + classic) and USB connectivity, internal rechargeable battery, and compatibility with Windows, Android, and iOS, it is ideal for inventory management, mobile point-of-sale, and field operations.

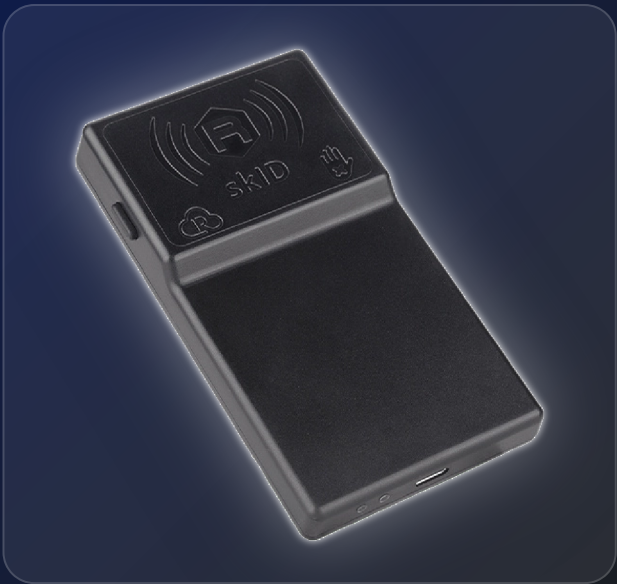

RFID

Frequency Range	865.600÷867.600 MHz (ETSI, R1280IE); 902÷928 MHz (FCC, R1280IU)
RF Power	Configurable 8 dBm to 22 dBm ERP (ETSI); 8.5 dBm to 24 dBm EIRP (FCC)
Number of Channels	4 channels (ETSI); 50 hopping channels (FCC)
Standard Compliance	EPC Class 1 Gen 2 - ISO 18000-63
Antenna Gain	0.0 dBic (typical)
Antenna Polarization	Integrated Circular Polarized Antenna
Read Range	Up to 2.0 m (Typical)

CONNECTIVITY

USB Interface	USB 2.0 Full Speed (12 Mbit/s) via USB Type-C connector
Bluetooth Interface	Bluetooth 4.1 Smart Ready compliant; 12 dBm EIRP BR/EDR, 8 dBm EIRP BLE; HID and SPP profiles

USER INTERFACE

Controls	Power and Trigger buttons
Indicators	Power and battery status LED; Communication and operation result LED; Bi-tonal buzzer and vibration element

POWER

Battery Type	Li-Ion 3.7 V, 1,200 mAh
Battery Life	Operating: > 12 h (with 40,000 tag readings); Standby: > 15 days
Battery Charging Time	3 hours via PC USB, 2 hours 15 min with 1 A AC/DC power supply

SIZE AND WEIGHT

Dimensions	112 x 62 x 10/16 mm
Weight	110 g

ENVIRONMENT

IP Rating	IP65
Operating Temperature	-10 °C to +55 °C

FEATURE HIGHLIGHTS

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- ETSI and FCC versions available
- Bluetooth communication (BLE + classic)
- Integrated circular polarized antenna
- Ergonomic form factor
- Battery powered
- iPhone/iPad compatibility
- 3 mounting options: magnetic, 3M Dual Lock™ or SP-Connect™

PRODUCT GROUP

Category	RFID Reader
Product Group	Mini Sled RAIN RFID Reader