

R-BasketReader

R-BasketReader is a compact UHF retail RFID reader designed for fast batch identification, self-service workflows and counter-level retail system integration.



RF SPECIFICATION

Identification Method	UHF
RF Chip	Impinj R2000
Frequency Range	840MHz-960MHz adjustable
Protocol	EPC C1G2, ISO 18000-6B, ISO 18000-6C
Frequency Band (Optional)	ETSI: 865-868MHz, JP: 916.8-920.4MHz, TW: 922.25-927.75MHz, ID: 923.125-925.125MHz, RUS: 866.6-867.4MHz, TEST: 802.75-998.75MHz, JP_LBT: 916.8-920.8MHz
RFID Item Reader	30 pcs
Function	Read & write function, multiple label identification, label data filtering, RSSI perception, quantity statistics, self-service card application

HARDWARE SPECIFICATION

Communication	RS232
---------------	-------

FUNCTION SELECTION

RFID Read & Write	Standard
Bar Code	Standard
QR Code	Standard
Fingerprint Recognition	Optional
Face Recognition	Standard
Sound Light Alarm	Optional
Keyboard	Optional
Solar Energy	Optional
Wireless Network	WiFi / 4G

BASIC SPECIFICATION

Material	Carbon steel plate, Glass
Power Supply	DC 12V/4A
Working Humidity	10%RH-90%RH
Operat Temperature	-10 deg C ~ 60 deg C
Size	680mm*580mm*814mm
Weight	about 20kg


FEATURE HIGHLIGHTS

- 30+ item bulk identification in 5 seconds
- 840-960 MHz UHF RFID technology with protocol extension support
- 20 cm anti-interference zone design
- Multi-interface retail system integration
- IP54 embedded installation flexibility
- Dual-color appearance options


PRODUCT GROUP

Category	UHF Retail RFID Reader
Product Group	RFID Gate Product

PRODUCT VIEWS

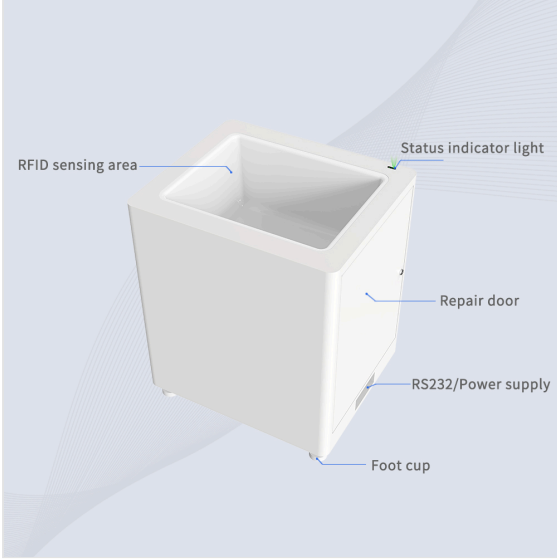

DIMENSION

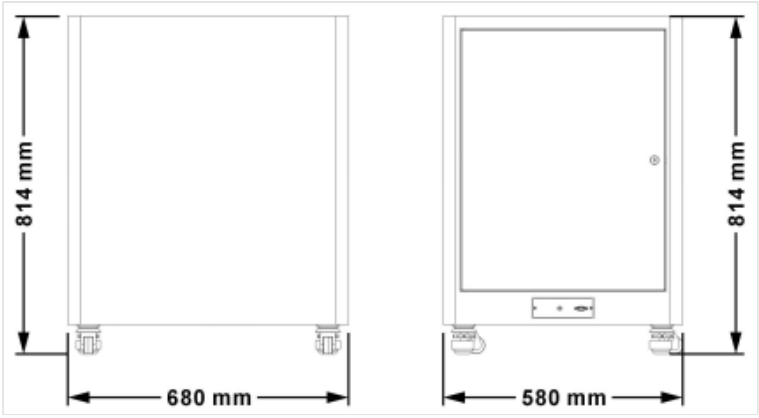

Unit : mm (inch)
Weight : about 20kg