

R-ProTunnel

R-ProTunnel is a belt RFID tunnel gateway designed for bulk inventory management with UHF RFID reading and industrial conveyor mechanics.



RF SPECIFICATION

Identification Method	UHF / HF (optional)
RF Chip	Impinj R2000
Frequency Range	840MHz-960MHz adjustable
Protocol	EPC C1G2, ISO 18000-6B, ISO 18000-6C
Frequency Band (Optional)	ETSI: 865-868MHz, JP: 916.8-920.4MHz, TW: 922.25-927.75MHz, ID: 923.125-925.125MHz, RUS: 866.6-867.4MHz, TEST: 802.75-998.75MHz, JP_LBT: 916.8-920.8MHz, HF: 13.56MHz
Product Capacity	1000 pcs (according of item size)
Recognition Response	1-5 seconds
Function	RFID read function, multiple label identification, label data filtering, RSSI perception, quantity statistics

HARDWARE SPECIFICATION

System Support	Windows / Android (optional)
Hardware	I5 CPU, 4G RAM, 128G ROM; RK3399 CPU, 4G RAM, 16G ROM (optional)
Display	1920 x 1080, 14-inch capacitive touch screen (21-inch optional)
Communication	RJ45 10/100Mbps

FUNCTION SELECTION

RFID Card Reader	Standard
Bar Code	Optional
QR Code	Optional
Fingerprint Recognition	Optional
Face Recognition	Optional
CCTV Camera	Optional
Solar Energy	Optional
Sound Light Alarm	Optional
Wireless Network	WiFi / 4G

BASIC SPECIFICATION

Material	Carbon steel plate, Glass
Power Supply	AC 110-220V 50Hz 50W
Working Humidity	10%RH-90%RH
Operat Temperature	0 deg C ~ 60 deg C
Size	900mm*1644mm*2352mm
Weight	about 150kg



FEATURE HIGHLIGHTS

- 14-inch capacitive touch screen with 1366 x 768 resolution
- 840-960 MHz UHF RFID technology with protocol extension support
- Multiple communication interfaces including RJ45, RS232, USB and alarm input
- Supports multiple devices operating in parallel
- 33-50 cm/s conveyor speed for warehouse item flow
- Real-time list generation on screen for easier management


PRODUCT GROUP

Category	RFID Warehouse Inventory Tracking System
Product Group	RFID Gate Product

PRODUCT VIEWS

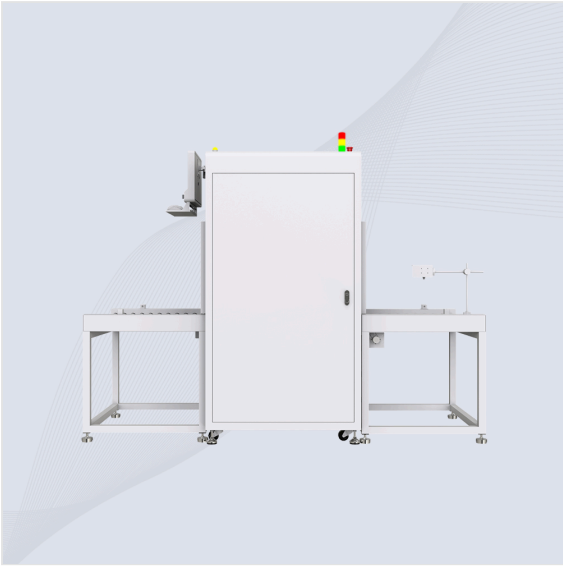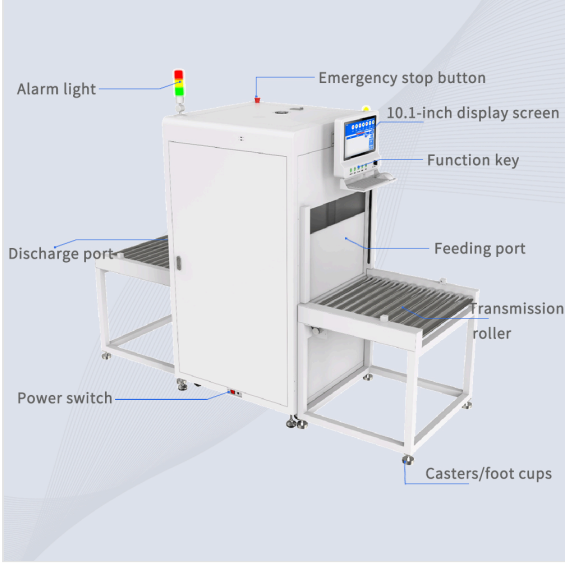

DIMENSION

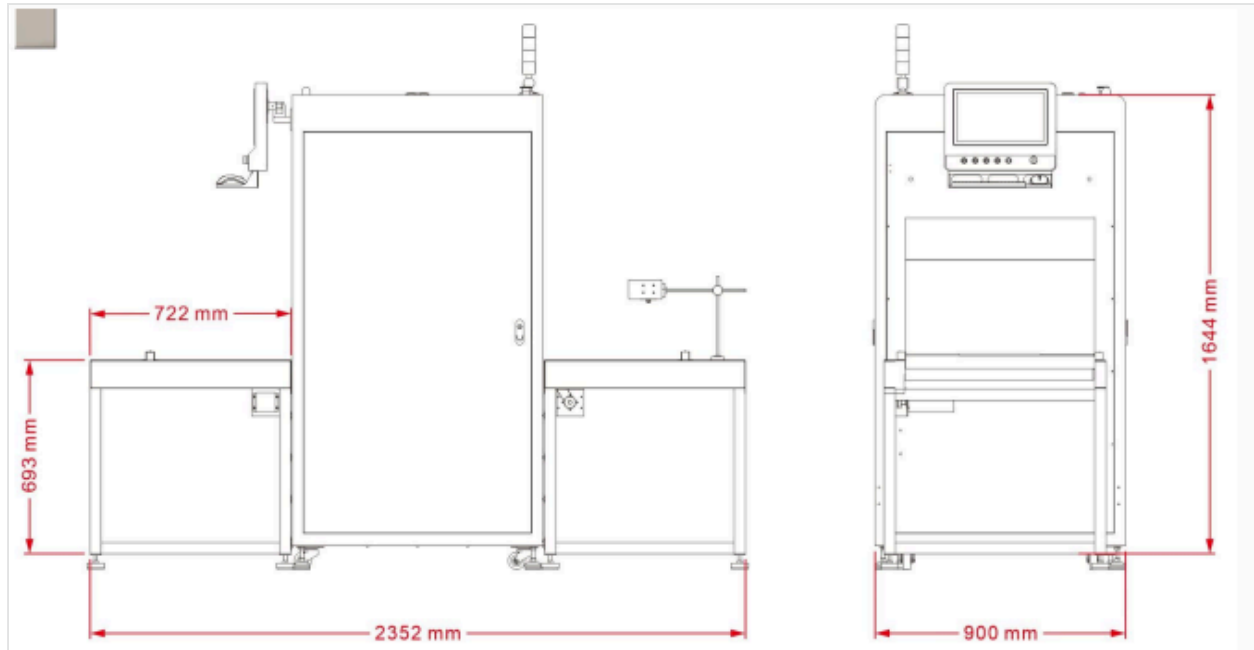

Unit : mm (inch)

Weight : about 150kg