


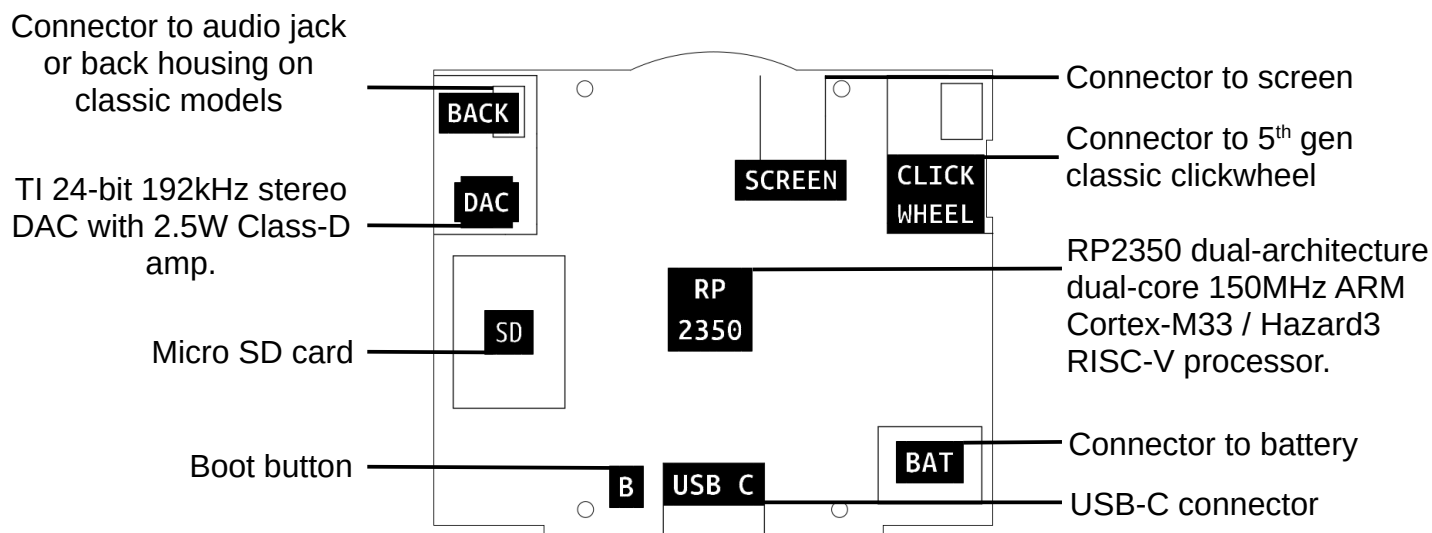

Back Connector

1	HAPTIC – IOX A5
2	HOLD – IO 10
3	GND
4	L
5	GND
6	R

1 High side haptic motor drive.

DAC

TLV320DAC3100IRHBR 24-bit 192kHz stereo DAC with 2.5W Class-D headphone amp.

SD

Micro SD card slot with USB 2 480 Mbps.

Boot Switch

Used to force the device into USB mass storage mode for programming to allow recovery and firmware replacement.

Screen Connector

1	3.3V
2	3.3V
3	IO1
4	IO2

5	IO3
6	IO4
7	IO5
8	IO6
9	GND
10	GND

Clickwheel Connector

1	3.3V	
2	CW_CLK – IO9	
3	CW_SDO – IO8	
4	CW_WAKE – IO0	
5	CW_RESET	N/C
6	CW_SDI – IO7	
7	UNKNOWN	
8	S3	
9	S4	
10	S5	Clickwheel
11	S2	Buttons
12	S1	
13	GND	


For use with a 5th gen classic clickwheel.

Processor

RP2350 dual-architecture dual-core 150MHz ARM Cortex-M33 / Hazard3 RISC-V processor.

Battery Connector

1	BAT +
2	BAT -



Molex Picoblade 2P 1.25

Only use 3.7V lithium polymer batteries with the correct connector and polarity!

USB-C Connector

USB 2.0 for charging and multiplexed data to the MCU or SD card controller.