

CustomCans.co.uk Custom Headphone Blog

One off DJ headphones and the making of

- [Home](#)

Dismantling Technics RP-DH1200

Posted by JFunk on Dec 2, 2009 in [Dismanteling and re building headphones](#) | [Subscribe](#)

This is a guide to dismantling the mighty Technics 1200 DJ headphones. These headphones take quite a long time to dismantle but there are no nasty surprises other than a few spots of glue. They are very well made and robust like most technics products and that really shows as you pull them apart.

Here goes then

Stage 1 – Clear your workspace and get those phones out, You will need a couple of small phillips head screwdrivers, a craft knife, a cocktail stick and a soldering iron.




Stage 2 – Remove the ear pad by unhooking a small section with your finger and working it round until it is fully removed.




Stage 3 – Unscrew the three screws holding the driver in place



Stage 4 – Pop the driver off to reveal the goodies within

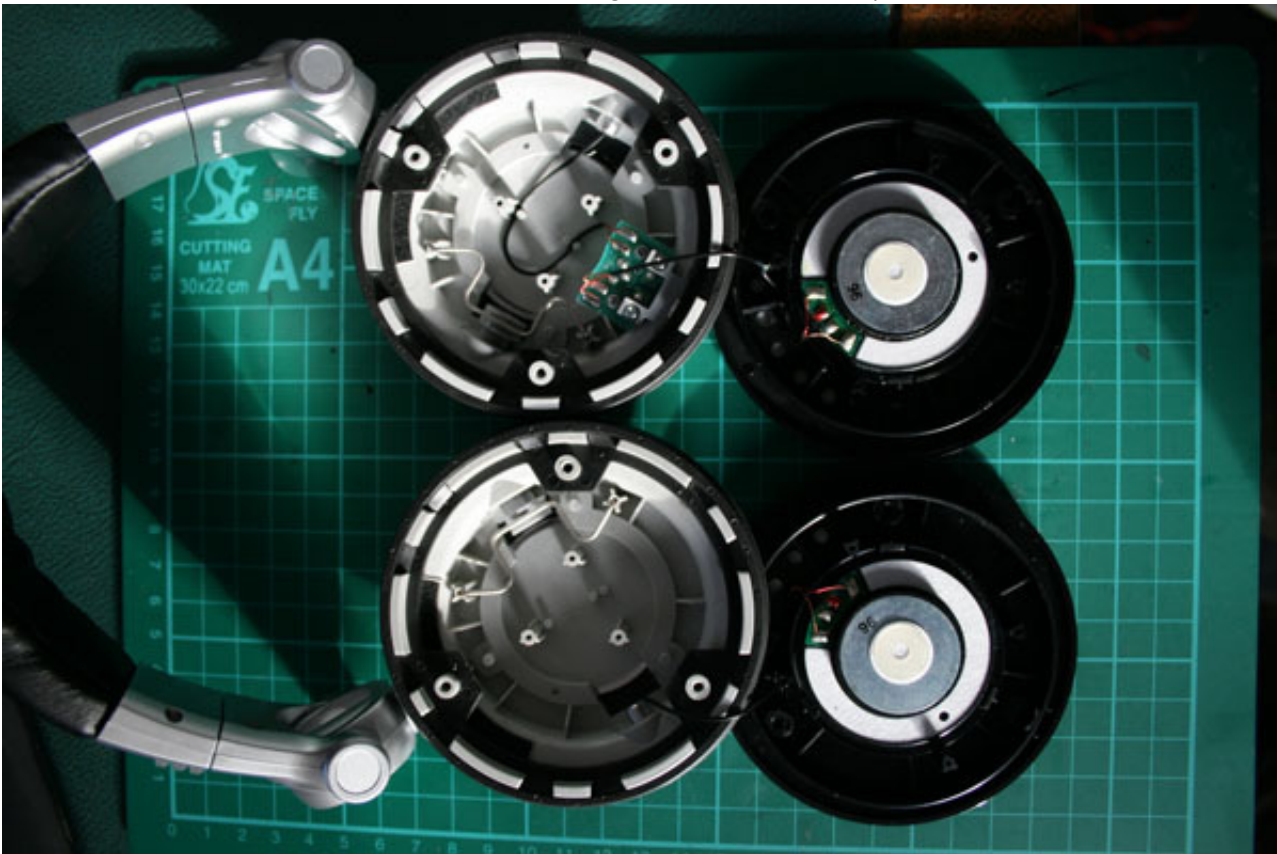


stage 5 – If you look closely you will notice that the thin cable that loops through the headband is glued to the the strain relievers inside the earcup. Use the craft knife the cut that away to release the cable.

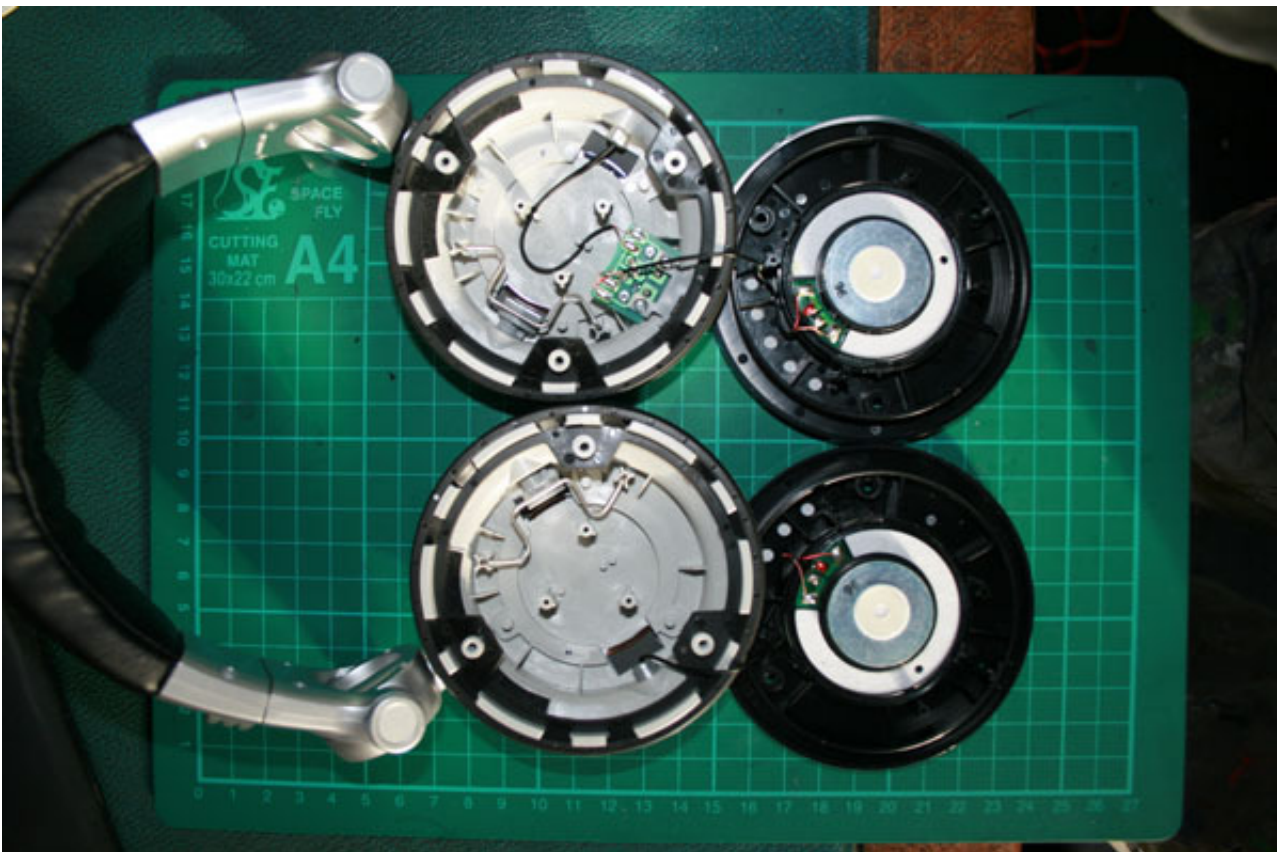

Stage 6 – Unsolder the drivers.. Pull slightly on the cables and dab the solderpads with a hot soldering iron. This

should release the cables from the drivers.

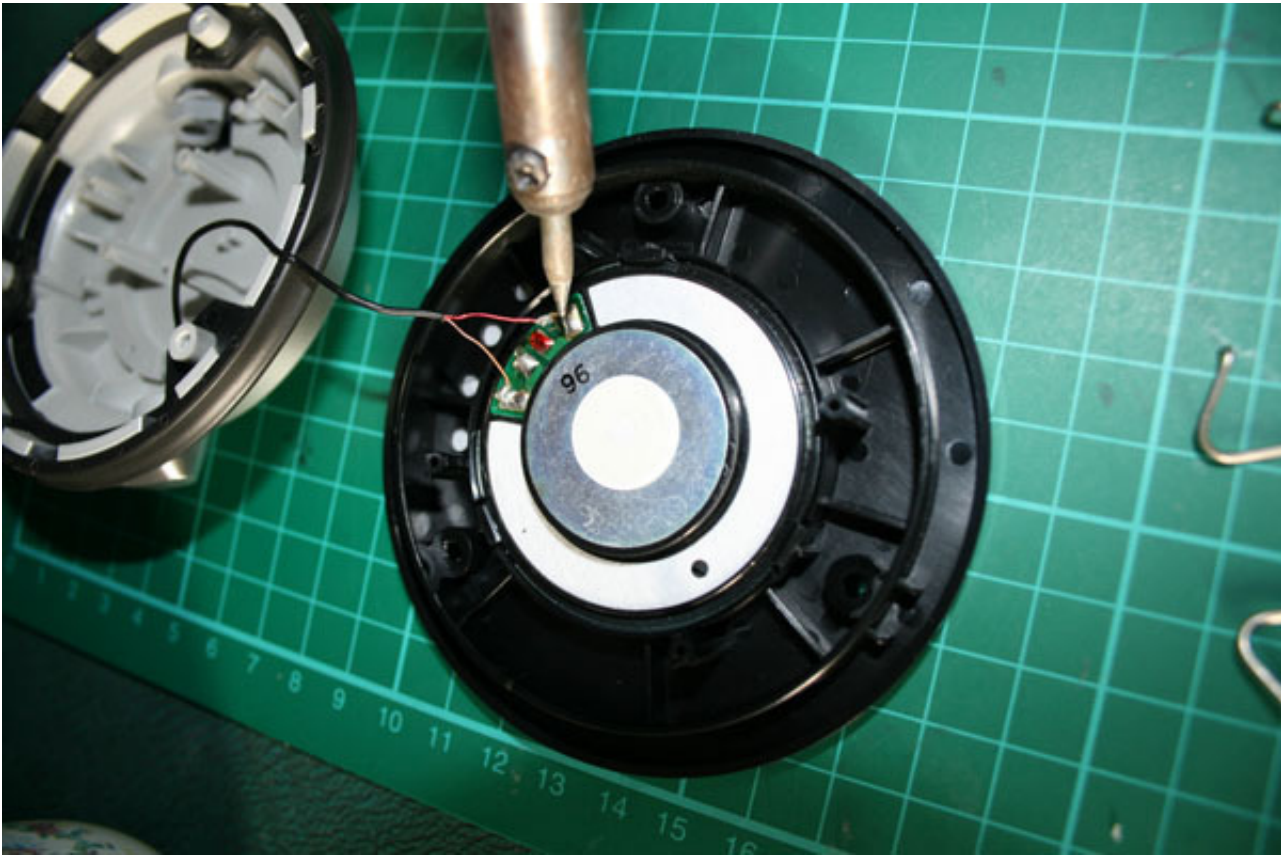


Stage 7 – gently pull on the rubber surround and it should start to come away. keep pulling it off section by section trying not to stretch it until it comes free




Stage 8 – Now just remove the bar springs by just pulling on them, they are not glued or anything, and you should be at this stage



Stage 9 – Unsolder the cable from the circuit board inside the cup. Then remove the glue again from the cable if you have not done so already.

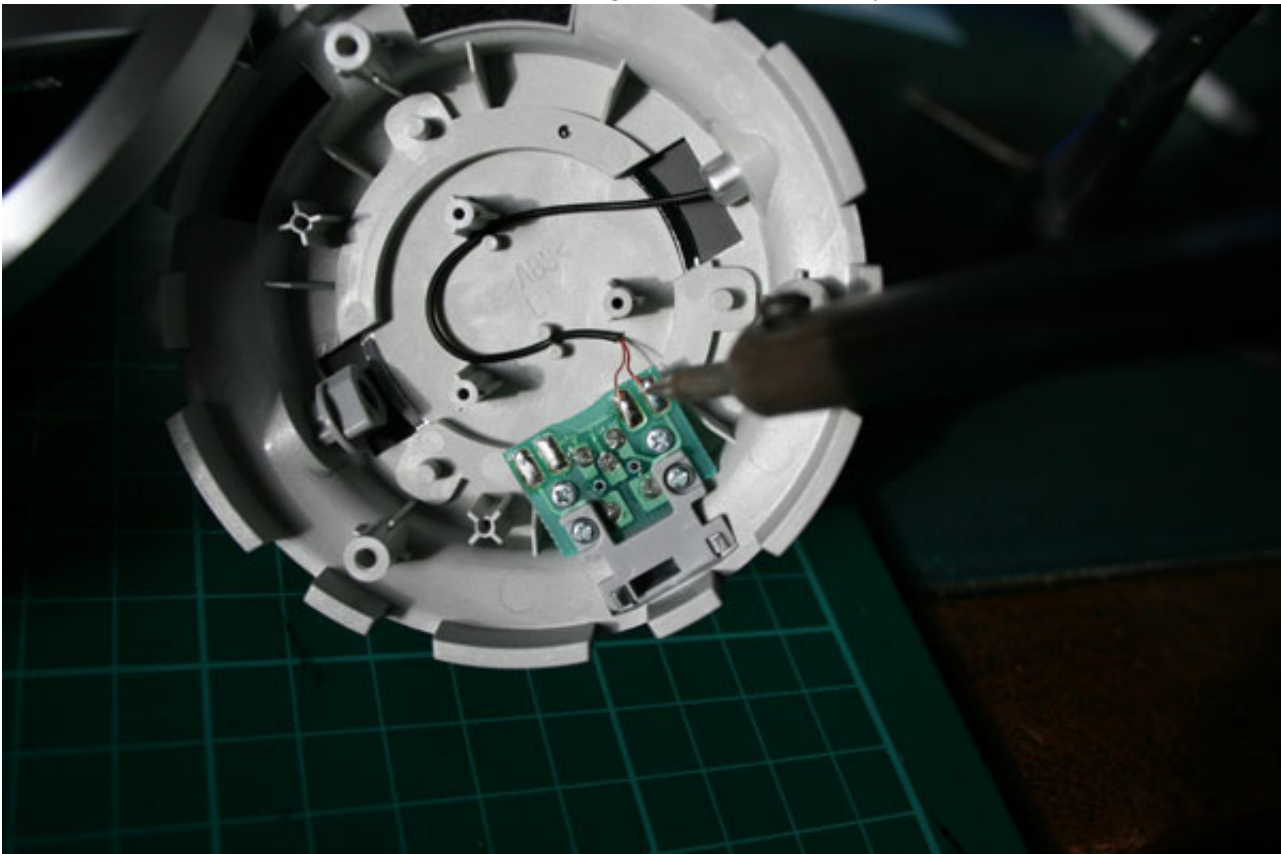

Stage 10 – Unscrew the two screws holding the socket that connects to the detachable cable .Use your cocktail stick to lever the socket away from the body (I use a cocktail stick because it wont scratch or dent the plastics.)

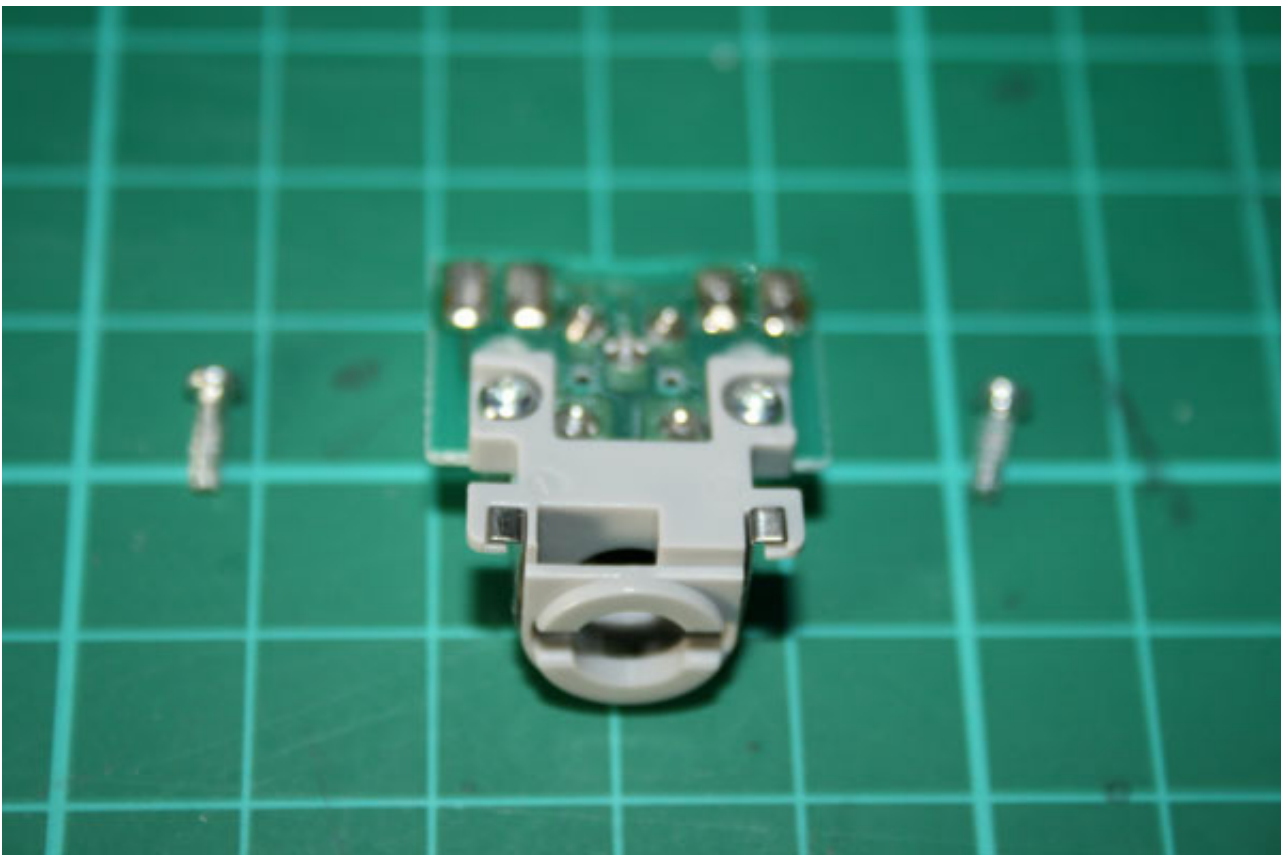

Stage 11 – Rotate the cup into this position. Then unscrew these three screws with a small phillips screwdriver. To stop you from losing the screws I recommend sticking them to a strip of masking tape... That wont roll away and are easier to find again.



Stage 12 – Lift up this end of the cover by poking your cocktail stick into the small rectangular hole. You only need to raise it a little, then slide the cocktail stick through the gap to hold it open.



Stage 13 – Now flip it over and you should now be able to pull the cam that was up against the bar spring away from the hinge. Then you can unhook the earcup from the lug on the other side.



Stage 14 – You can now gently pull the cup hinge away from the headband to release the cover you unscrewed

in stage 11. You only need to move it around 1mm just enough to release the cover.. Don't try to pull too hard or you may damage the cable. You can use the cocktail stick to lever it up if it is being awkward. You should be here...



Stage 15 – Now you can remove the cable from the run and the remove the cup hinge from the headband. Again be careful of the cable.



Stage 16 – Here is where we are at now... look at that



Stage 17 – You can now remove the metal ring from the face. There is a rectangular whole underneath through which you can poke the ring. It is stuck down with double sided sticky tape so a little force will release it. Then

lever the the rest of it up. Again use the cocktail stick (I know.... I used a screwdriver in the picture and I deserve a slapped wrist for that.)



Stage 18 – You can now undo these three screws to take the technics logo off. Underneath there is a small circle of sponge that stops vibration so dont lose that piece.





And that's it... You can carry on and dismantle the headband and hinges but it gets dangerous from here on so you are on your own if you want to try that

... other posts by [JFunk](#)

7 Comments



- [teylor](#) says:
[May 24, 2010 at 4:59 am](#)

technics is the nicest phone worldwide!

(The Armin van Buuren always use this!) Ta explained why in the category of so much music and mixes it friend you dismantled it all (good memory that you must have seen!)

I dismount my own, I doubt I ride back !!!!!



- [Gene](#) says:
[June 19, 2010 at 1:55 am](#)

Excellent post! Since my TECHNICS RPDH 1200's headband and ear pads are wearing out, I've been considering removing these pieces to customize my headphones. I'm considering hiring a seamstress or tailor to redo these pieces with quality leather. Any suggestions?

Gene



- [JFunk](#) says:
[June 19, 2010 at 7:40 am](#)

Yep. I like your style. I know that you can buy new pads but getting them re-made in leather is a cool idea. I reckon doing the pad on the headband would be easy enough but remaking the earpads would be harder as they need to hook over the drivers to keep them in place and if they were not made exactly as the originals the earpads would slip off or not go on in the first place. One thing you could do is make most of it from leather but make the ring that hooks over the driver from an elastic fabric.

If you do go ahead you will have to update me with the result ... I bet it will look great

J



- [Web Forms](#) says:
[August 24, 2010 at 1:57 am](#)

I am just making a blog related to this. If you allow, I would like to use some of your content. And with full reference of course. Thanks in advance.

- Andre



- [JFunk](#) says:
[August 24, 2010 at 6:53 am](#)

Yes . Andre that's fine



- [Jape](#) says:
[September 15, 2010 at 2:25 am](#)

Excellent instructions, thank you. I am currently trying to fix my technic headphones. They were victim of the common issue of the right channel giving out. Upon dissecting them, I can find no obvious issue with the connections to the drivers, I believe the issue is in the wire routing through the headband. I have tried to disassemble the headband, but i can not seem to open the hinges. Have you successfully disassembled the headband or found a way to fix the death of the right channel? Thank you.



- [JFunk](#) says:

[September 15, 2010 at 9:33 pm](#)

Its normally the headphone jack that needs replacing. use a multimeter or circuit tester to check all the cables first to give you a clue as to where the problem is

Leave a Reply

Name (required)

Email (required)

Website

XHTML: You can use these tags: ' <abbr title=""> <acronym title=""> <blockquote cite=""> <cite> <code> <del datetime=""> <i> <q cite=""> <strike>

Submit Comment

Enter keyword(s) and hit e

Search

• Calendar

October 2010

Mon Tue Wed Thu Fri Sat Sun

				1	2	3
4	5	6	7	8	9	10
11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28	29	30	31

[« Aug](#)

Linkage

- CustomCans.co.uk
- JFunk.org

Categories

- [Dismanteling and re building headphones](#) (5)
- [Gallery](#) (16)
 - [Oem and Street](#) (5)
 - [Pro DJ Headphones](#) (11)
- [General](#) (9)
- [Special projects](#) (3)
- [Technologys](#) (10)
- [Uncategorized](#) (3)
- [Work in progress](#) (5)

Archives

- [October 2010](#) (3)
- [August 2010](#) (4)
- [July 2010](#) (1)
- [June 2010](#) (3)
- [March 2010](#) (1)
- [February 2010](#) (4)
- [January 2010](#) (4)
- [December 2009](#) (4)
- [November 2009](#) (17)
- [October 2009](#) (7)

Meta

- [Register](#)
- [Log in](#)
- [Valid XHTML](#)
- [XFN](#)
- [WordPress](#)

Copyright © 2010 **CustomCans.co.uk Custom Headphone Blog** All rights reserved.

Desk Mess Mirrored v1.4.2 theme from BuyNowShop.com.