E-01 ELECTRICAL FEED SCHEMATIC

TAPE MEASURE SATELLITE YAGI | TM-YAGI-01

DRAWING REV A

FOR REVIEW - SOURCE O3-O6 REV L

CIRCUIT A | 2 m SHUNT-HAIRPIN FEED

SCHEMATIC / NTS

2M-DE SPLIT DRIVEN ELEMENT | X = 13.500 FROM FRONT

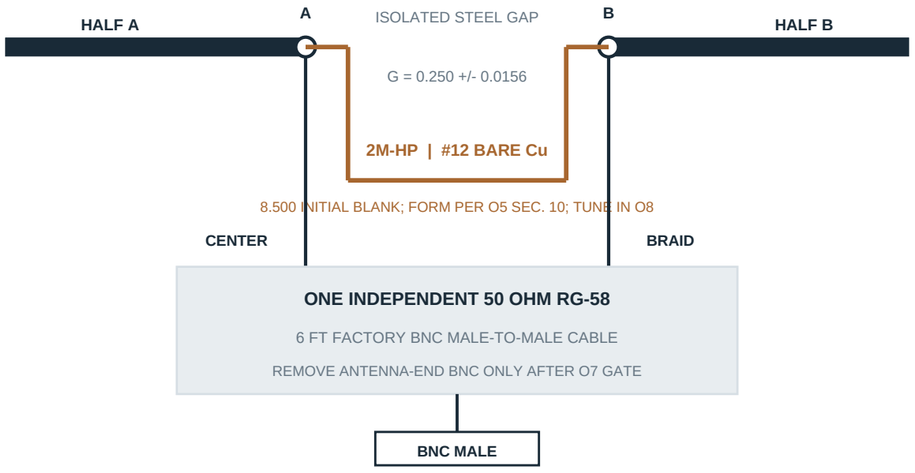

OPERATOR END: LABEL '2 m'

CIRCUIT B | 70 cm DIRECT FEED

SCHEMATIC / NTS

70-DE SPLIT DRIVEN ELEMENT | X = 18.500 FROM FRONT

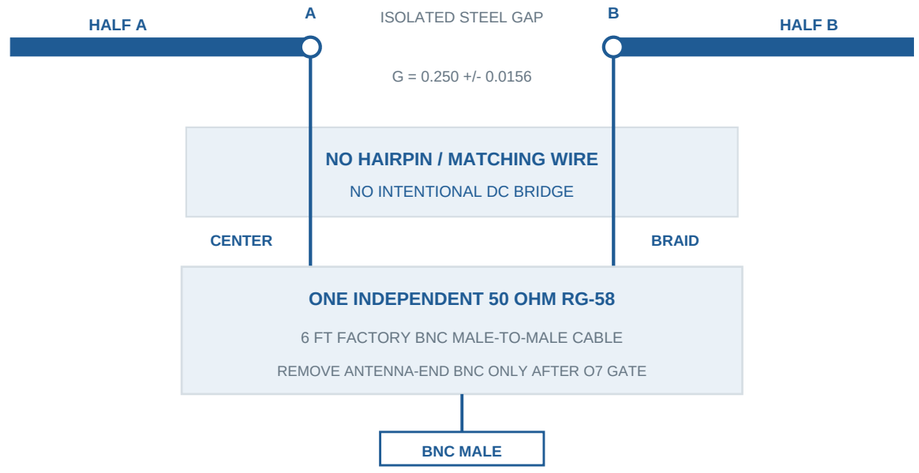

OPERATOR END: LABEL '70 cm'

DC CONTINUITY / ISOLATION CHECKS

DESIGN EXPECTATION / O3 SEC. 17

TEST (RADIOS, ANALYZERS, DIPLEXERS DISCONNECTED)	2 m	70 cm
BNC PIN -> ASSIGNED DRIVEN HALF	CONTINUITY	CONTINUITY
BNC SHELL -> ASSIGNED DRIVEN HALF	CONTINUITY	CONTINUITY
PIN -> SHELL, ONE 2 m HAIRPIN END DISCONNECTED	OPEN	OPEN
PIN -> SHELL, FINISHED BASELINE	**CONT. VIA HAIRPIN**	**OPEN**
EITHER FEED CONDUCTOR -> PARASITIC ELEMENTS	OPEN	OPEN
ALL CROSS-FEED CONDUCTOR PAIRS, EQUIPMENT DETACHED	OPEN	OPEN

O7 CHECK SEQUENCE

O5 HOLD POINTS F / G

1. PASS O5 SEC. 12 FEED-ENTRY GATE.
2. CONNECT CENTER TO A; BRAID TO B.
3. WITH ONE 2 m HAIRPIN END FREE,
   VERIFY BOTH PIN-TO-SHELL PATHS OPEN.
4. CONNECT HAIRPIN; VERIFY 2 m PATH
   CLOSES THROUGH HAIRPIN; 70 cm STAYS OPEN.

FAILED CHECK? STOP / INSPECT / RECORD.

ELECTRICAL INTERFACES / BUILD LIMITS

O3 SEC. 13 / O5 SEC. 9-12

A = CENTER LUG + ONE HALF; B = BRAID LUG + OTHER HALF. LEFT/RIGHT MAY REVERSE BEFORE ASSEMBLY IF LABELED.

EACH NODE: OWN #6-32 HARDWARE / LUG; 2 m ONLY ADDS ONE BARE HAIRPIN END. NO SCREW / LUG MAY BRIDGE THE GAP.

NO PASSIVE BNC TEE. BASELINE: TWO RADIOS / TWO FEEDS. FERRITES, REAR ROUTING, STRAIN RELIEF PER O5 SEC. 12.

GENERAL NOTES

1. SCHEMATIC ONLY; NOT TO SCALE. STEEL GAP IS NOT THE FEED-SCREW CENTER SPACING.
2. 2 m HAIRPIN IS A STARTING GEOMETRY; FINAL MATCH REQUIRES O8 RF MEASUREMENT.
3. THIS SHEET STATES EXPECTED RESULTS; NO AS-BUILT DC OR RF DATA ARE CLAIMED.

SOURCE BASELINE
O3/O4/O5/O6 REV L
COMMIT 186c773

SCALE AT 100% PRINT
SCHEMATIC / NTS
17 x 11 IN SHEET

ISSUE / DATE
REV A - FOR REVIEW
2026-10-12

SHEET E-01