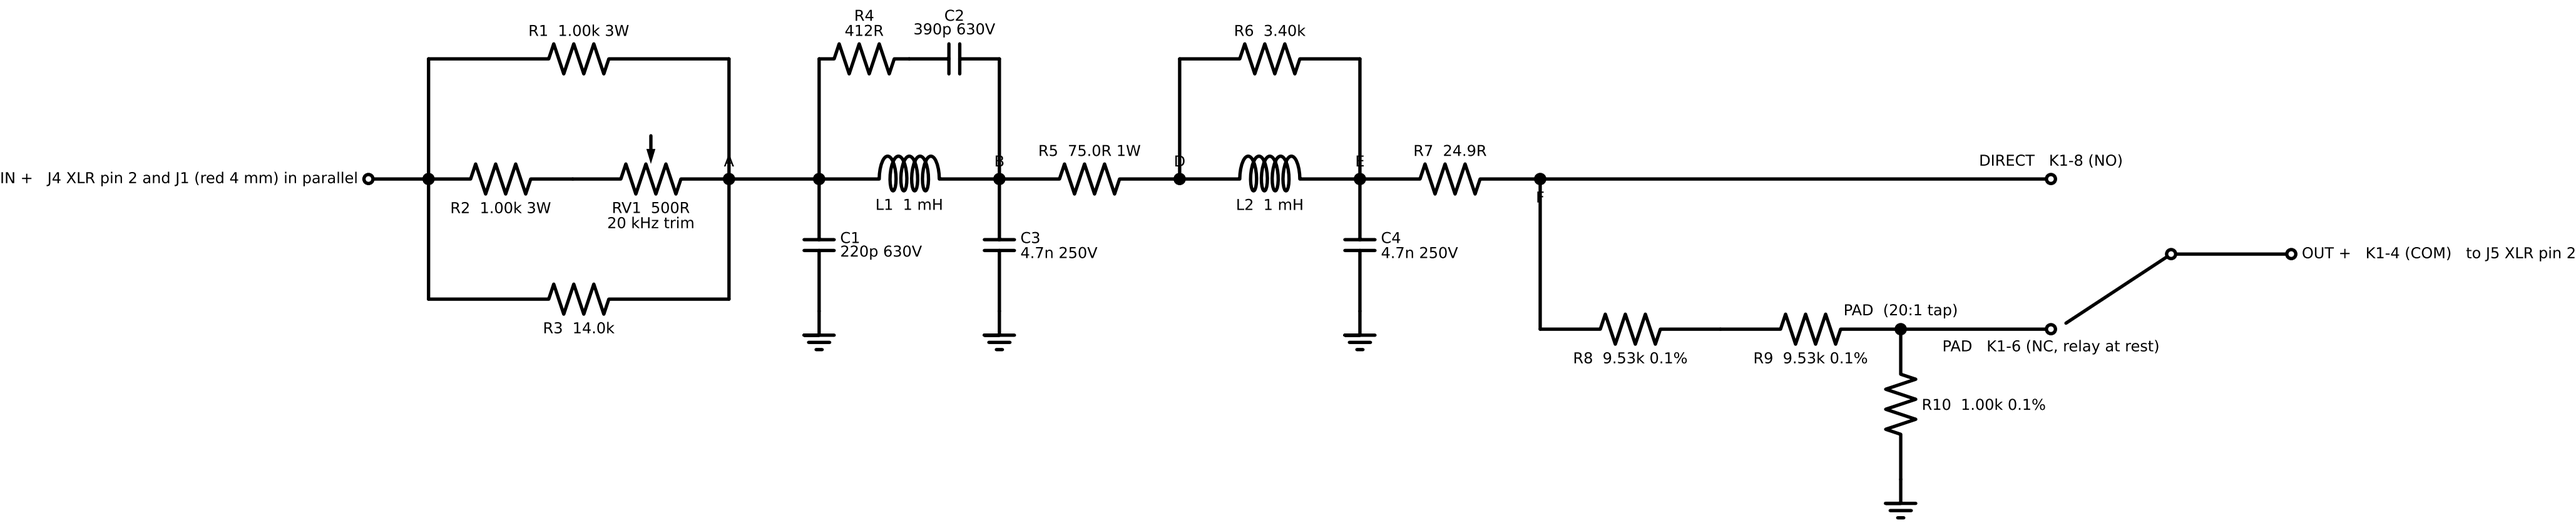

Negative leg, IN - (J4 XLR pin 3 / J2 black) to OUT - (J5 XLR pin 3): identical; R11-R20, RV2, C5-C10, L3, L4; its switch is relay pole B, pins 9 / 13 / 11.
XLR pin 1 and shell, J3 (green 4 mm), the ground plane and the box: GND = the QA403's Audio Common. Connectors as on the AP AUX-0025; the QA403 takes an XLR-to-two-BNC lead.
K1 (Omron G6A-274P-ST-US DC12) is a footprint only until the matrix controller drives it; until then a DPDT toggle is wired into its six contact holes. Coil on J9 (1 = +12 V), D1 1N4148 across the coil, cathode (band) to J9-1.
With K1 at rest or a toggle in the PAD position the analyzer sees 1/20 of the amplifier; DIRECT is the full voltage, limited to 40 Vrms by the QA403.