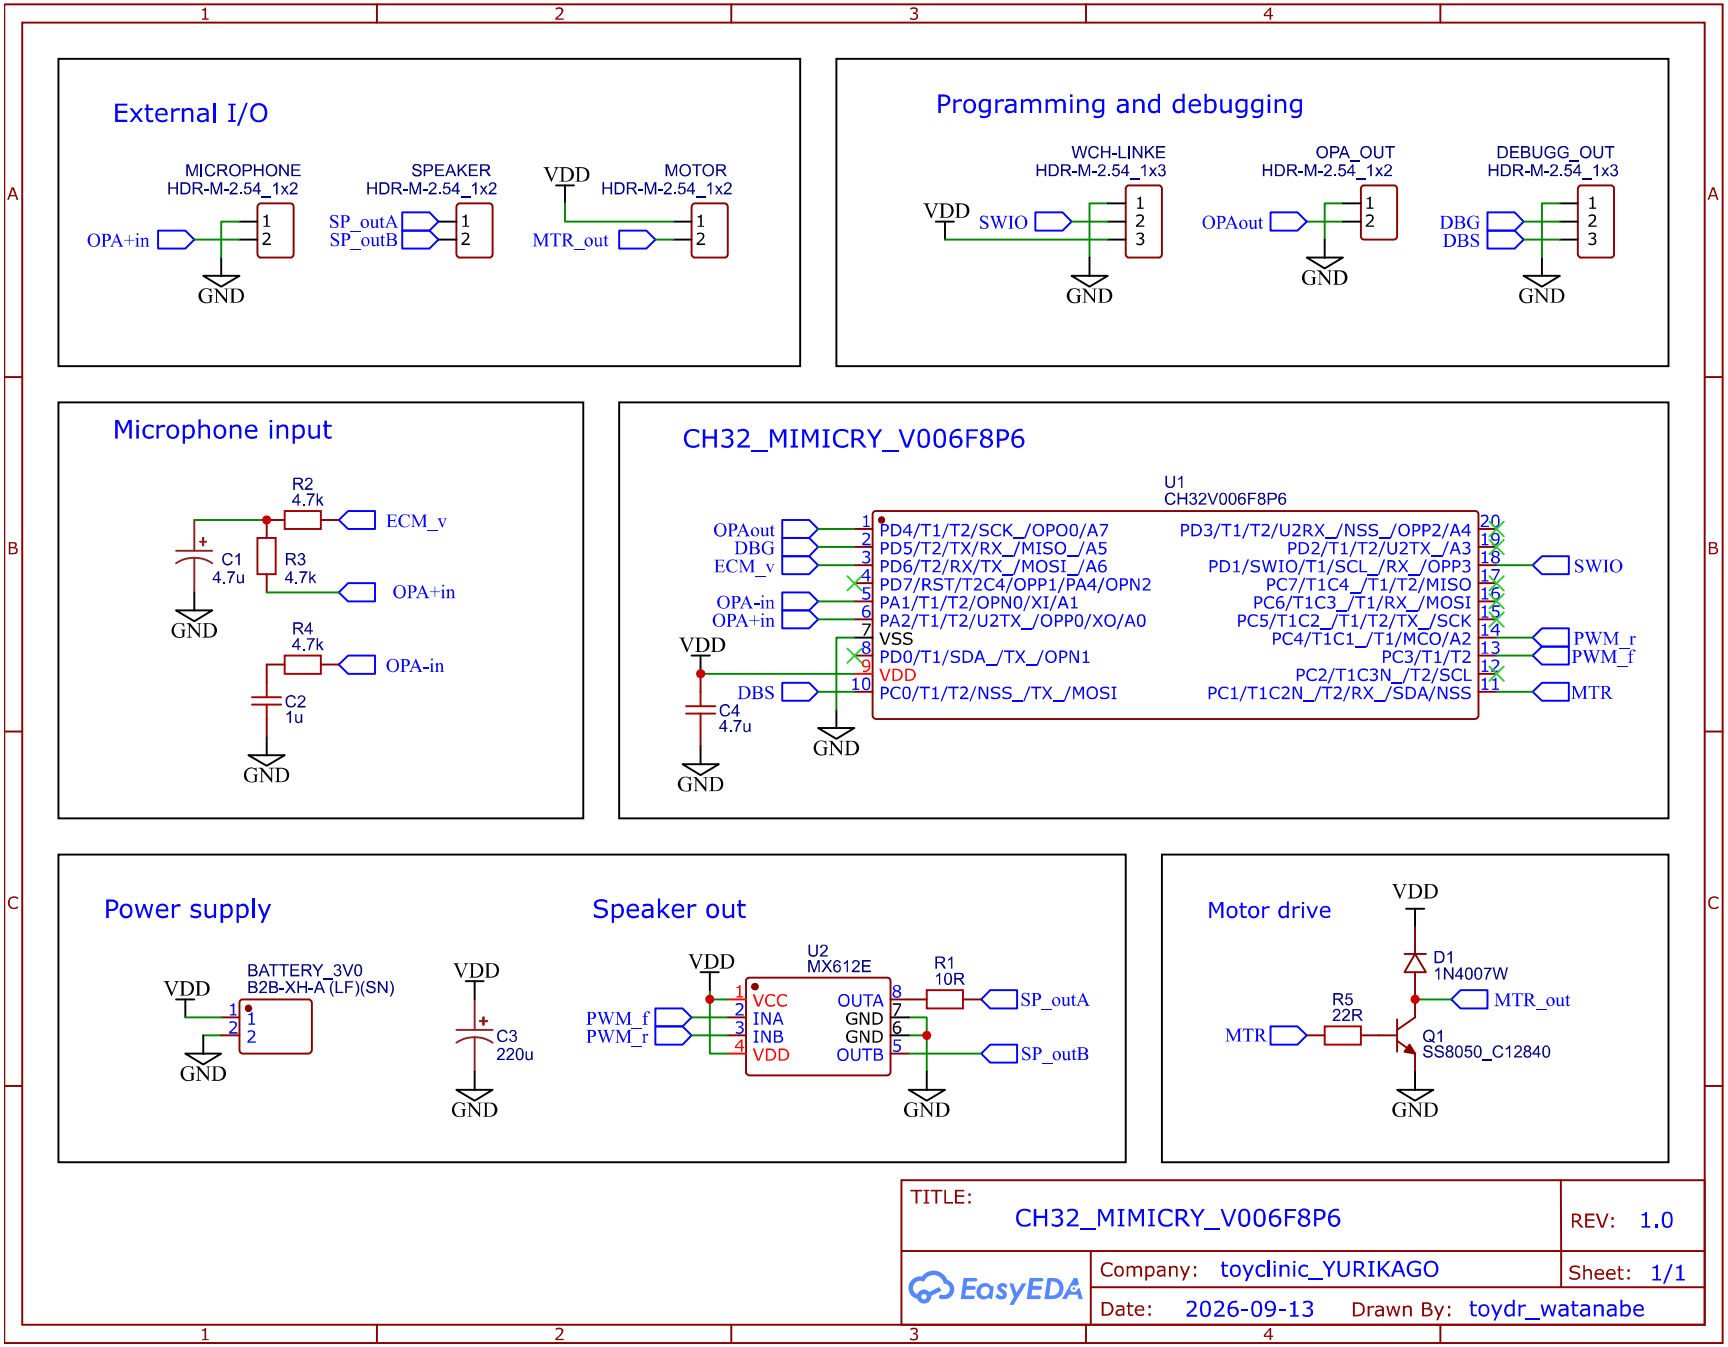

External I/O
MICROPHONE
HDR-M-2.54_1x2
OPA+in
GND
SPEAKER
HDR-M-2.54_1x2
SP_outA
SP_outB
VDD
MOTOR
HDR-M-2.54_1x2
MTR_out
Programming and debugging
WCH-LINKE
HDR-M-2.54_1x3
VDD
SWIO
GND
OPA_OUT
HDR-M-2.54_1x2
OPAout
GND
DEBUGG_OUT
HDR-M-2.54_1x3
DBG
DBS
GND
Microphone input
R2
4.7k
ECM_v
C1
4.7u
R3
4.7k
OPA+in
GND
R4
4.7k
OPA-in
C2
1u
GND
CH32_MIMICRY_V006F8P6
U1
CH32V006F8P6
OPAout
DBG
ECM_v
OPA-in
OPA+in
VDD
DBS
C4
4.7u
GND
PD4/T1/T2/SCK_/OPO0/A7
PD5/T2/TX/RX_/MISO_/A5
PD6/T2/RX/TX_/MOSI_/A6
PD7/RST/T2C4/OPP1/PA4/OPN2
PA1/T1/T2/OPN0/XI/A1
PA2/T1/T2/U2TX_/OPP0/XO/A0
VSS
PD0/T1/SDA_/TX_/OPN1
VDD
PC0/T1/T2/NSS_/TX_/MOSI
PD3/T1/T2/U2RX_/NSS_/OPP2/A4
PD2/T1/T2/U2TX_/A3
PD1/SWIO/T1/SCL_/RX_/OPP3
PC7/T1C4_/T1/T2/MISO
PC6/T1C3_/T1/RX_/MOSI
PC5/T1C2_/T1/T2/TX_/SCK
PC4/T1C1_/T1/MCO/A2
PC3/T1/T2
PC2/T1C3N_/T2/SCL
PC1/T1C2N_/T2/RX_/SDA/NSS
SWIO
PWM_r
PWM_f
MTR
Power supply
VDD
BATTERY_3V0
B2B-XH-A (LF)(SN)
GND
VDD
C3
220u
GND
Speaker out
VDD
U2
MX612E
PWM_f
PWM_r
VCC
INA
INB
VDD
OUTA
GND
GND
OUTB
R1
10R
SP_outA
SP_outB
GND
Motor drive
VDD
D1
1N4007W
MTR_out
R5
22R
MTR
Q1
SS8050_C12840
GND
TITLE:
CH32_MIMICRY_V006F8P6
REV: 1.0
EasyEDA
Company: toyclinic_YURIKAGO
Sheet: 1/1
Date: 2026-09-13
Drawn By: toydr_watanabe