


HT-ProMon Series Digital Heat Trace Control

HMI Navigation Flowchart and Commissioning Worksheet

HMI Firmware v1.1.0

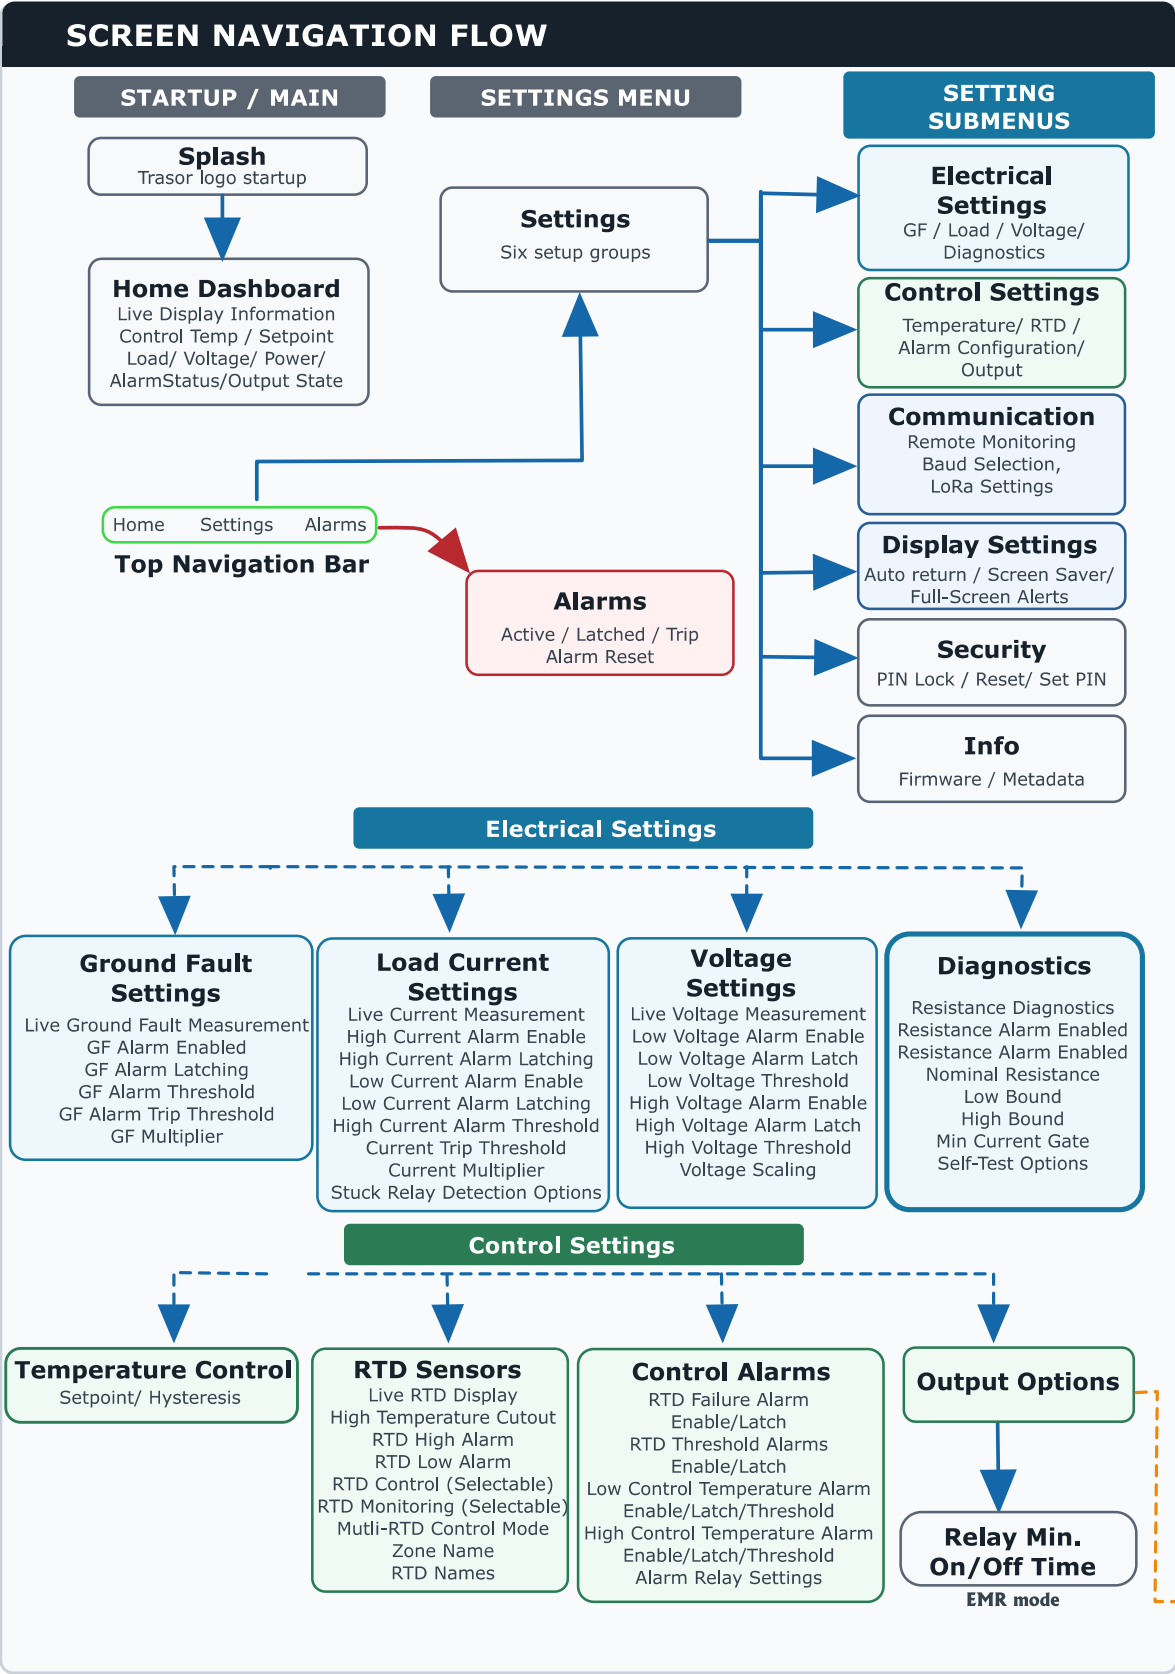

FACTORY DEFAULTS, AND USER-DEFINED VALUES

Screen Menu & Parameter	Default Value	User Defined Value
GROUND FAULT		
GF Alarm Enable	On	
GF Alarm Latch	On	
GF Alarm Threshold	20 mA	
GF Trip Threshold	30 mA	
GF Multiplier	1.0	
LOAD CURRENT		
Low Load Alarm Enable	On	
Low Load Alarm Latch	On	
Low Load Alarm Threshold	1.0 A	
High Load Alarm Enable	On	
High Load Alarm Latch	On	
High Load Alarm Threshold	29.0 A	
Load Trip Threshold	30.0 A	
Load Multiplier	1.0	
Stuck Relay Min Current	0.3 A	
Stuck Relay Delay	500 ms	
VOLTAGE		
Low Voltage Alarm Enable	On	
Low Voltage Alarm Latch	Off	
Low Voltage Threshold	85 V	
High Voltage Alarm Enable	Off	
High Voltage Alarm Latch	Off	
High Voltage Threshold	305 V	
Voltage Ratio	1.0	
Control Transformer Option	Off	
RESISTANCE AND SELF-TEST		
Resistance Alarm Enable	Off	
Resistance Alarm Latch	Off	
Nominal Resistance	0.0 ohm	
Low Resistance Bound	0.0 ohm	
High Resistance Bound	0.0 ohm	
Resistance Min Current Gate	0.5 A	
Self-Test Enable	Off	
Self-Test Period	24 hr	
Self-Test On Duration	1 min	
OUTPUT, SSR, AND RELAY		
Output Mode	Relay	
Min Relay On Time	2000 ms	
Min Relay Off Time	2000 ms	
SSR Cycle Period	400 ms	
SSR Current Ceiling	25.0 A	
PID Kp	1.00	
PID Ki	0.00	
PID Kd	0.00	
Auto-Tune Relay Amplitude	50%	
COMMUNICATION		
HMI Port: Slave ID	1	
HMI Port: Baud Rate	115200	
Remote Port: Slave ID	1	
Remote Port: Baud Rate	9600	
Baud Options	9600-115200	

Screen Menu & Parameter	Default Value	User Defined Value
RTD SENSORS AND TEMPERATURE CONTROL		
Control Point Name	Control Point	
RTD 1 Name	RTD 1	
RTD 2 Name	RTD 2	
RTD 3 Name	RTD 3	
Control RTD Mask	RTD 1	
Monitor RTD Mask	None	
Multi-RTD Control Mode	Lowest	
Control Setpoint	68 F	
Control Hysteresis	4 F	
High Temp Cut-Out	450 F	
Temperature Units	Fahrenheit	
CONTROL ALARMS		
RTD Failure Alarm Enable	On	
RTD Failure Alarm Latch	On	
RTD Low Alarm Enable	Off	
RTD Low Alarm Latch	Off	
RTD Low Alarm Threshold	0 F	
RTD High Alarm Enable	Off	
RTD High Alarm Latch	Off	
RTD High Alarm Threshold	212 F	
Control Temp Low Enable	On	
Control Temp Low Latch	Off	
Control Temp Low Threshold	41 F	
Control Temp High Enable	On	
Control Temp High Latch	Off	
Control Temp High Threshold	212 F	
DISPLAY AND SECURITY		
Home Auto Return	On	
Home Timeout	180 sec	
Logo Screensaver	On	
Screensaver Timeout	300 sec	
Full-Screen Alerts	On	
PIN Lock	Off	
PIN Set	Off	
Recovery Unlock Timeout	120 sec	
Factory Reset	Action	
ALARMS AND FAULT RESPONSE		
Active Alarm List	Check screen	
Latched Alarm List	Check screen	
Acknowledge Alert	Action	
Reset Alarm / Trip	Action	

SSR OUTPUT OPTIONS AND ADVANCED SERVICE PATH

PIN Entry
if locked

Output Control
PID Tuning Kp, Ki, Kd
Current Ceiling
Live SSR Duty Output
SSR Output Diagnostics

Auto-Tune PID
Relay Amplitude

Notes
Screen visibility depends on Electromechanical (EMR) or Solid State (SSR) configuration, controller state, security lock, output mode, and active faults.
Use the User Defined Value columns for field settings. SSR advanced screens are available only when the controller reports SSR Configuration and valid data is input.