

CONFIGURACION EQUIPOS XDSL

Ejemplo:

Contrato V-07961	Zona Mexico	Asignado A: Erick Mamani	Etapas Revision: Visita Realizada	Estado Final: Realizado Sin Problemas	Reprogramacion:
Fecha Programacion 05/08/2025	De: Sin Detalle	A: 00:00	Llamada al Usuario 04/08/2025	Sintoma CRM Indefinido u Otro	
Tipo de Actividad Problema Técnico	Proceso Ninguno	Cuenta Cuenca Marquez Maritza			
Resumen TKT Intermitencia en la Conexion		Descripcion Llaman del, 79535811, Srta Catherine Cuenca, reporta anteriormente tuvo problemas de linea , pero ahora se presenta intermitencia por WiFi			
Instrucciones Equipo: ERV0Q7W02559 D: 624m		Observaciones Finales Observaciones y Descripcion (Este Campo es Opcional) Ej. Suspendido por el Usuario			


Nodo	Puerto	IDF	VPI	VCI	Down	Up
S185 (2)	Plaza Riosinho	1 1 12	140	392	112	50016 1280

Tipo IP	Subnet	Mask	Remote Address
PPPoE+WiFi		24	

ID Ticket	Hora Derivacion Tkt	Hora Importacion	Hora Revision
1-230480316	2025-08-04 19:15:00	2025-08-05 10:58:00	2025-08-04 19:23:00

PRIMER PASO:

Ingresar al sistema del equipo con el IP 192.168.1.1

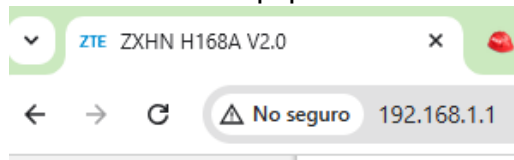

Credenciales del MODEM reseteado:

Username: admin

Password: aldmr

SEGUNDO PASO WAN:

- En la pestaña INTERNET / WAN / DSL Connection / PPPoE PTM
- **MTU:** 1488
- **Username:** v-07961@accelerate (número de contrato)
- **Password:** s18521112 (número de nodo y número de puerto)
- **APPLY**

Status	DSL 3G
WAN	Page Information
QoS	This page provides the function of DSL connection parameter(s) configuration.
Security	▼ DSL Connection
Parental Controls	What should be noted when configuring DSL connection?
DDNS	▼ PPPoE PTM 
SNTp	Detail
Port Binding	Connection Name PPPoE PTM
Multicast	

TERCER PASO WLAN:

- Vamos a la pestaña: Local Network / WLAN / WLAN Basic / WLAN on/off Configuration
- Activamos WLAN (2.4 GHz y WLAN 5GHz)
- **APPLY**

Status	WLAN Basic WLAN Advanced
WLAN	Page Information
LAN	This page provides the function of WLAN basic parameter(s) configuration.
Routing	▼ WLAN On/Off Configuration
FTP	WLAN (2.4GHz) ☒ On ☐ Off
UPnP	WLAN (5GHz) ☒ On ☐ Off
DMS	Apply Cancel
Samba Service	► WLAN Global Configuration
DNS	► WLAN SSID Configuration

- Continuamos en WLAN SSID Configuration:
SSID1 (2.4GHz)
- SSID Name: vw-07961 (número de contrato sin V)

- WPA Passphrase: ZTE0RUWL9F02073 (serial del equipo que se encuentra en Management & Diagnosis)

Internet	Local Network	Management & Diagnosis										
Page Information This page shows the basic information of device. ▼ Device Information <table border="1"> <tbody> <tr> <td>Device Type</td> <td>ZXHN H168A V2.0</td> </tr> <tr> <td>Device Serial No.</td> <td>ZTE0RUWL9F02073</td> </tr> <tr> <td>Hardware Version</td> <td>V2.0.0</td> </tr> <tr> <td>Software Version</td> <td>V2.0.0C1_AXIS</td> </tr> <tr> <td>Boot Version</td> <td>V2.0.0</td> </tr> </tbody> </table>			Device Type	ZXHN H168A V2.0	Device Serial No.	ZTE0RUWL9F02073	Hardware Version	V2.0.0	Software Version	V2.0.0C1_AXIS	Boot Version	V2.0.0
Device Type	ZXHN H168A V2.0											
Device Serial No.	ZTE0RUWL9F02073											
Hardware Version	V2.0.0											
Software Version	V2.0.0C1_AXIS											
Boot Version	V2.0.0											

- **APPLY**

SSID5 (5GHz)

- SSID Name: vw-07961_5G (número de contrato sin V)
- WPA Passphrase: ZTE0RUWL9F02073 (serial del equipo que se encuentra en Management & Diagnosis)

- **APPLY**

OPCIONAL (Dependiendo de cada caso):

▼ WLAN Global Configuration

▼ 2.4GHz

Channel	Auto
Mode	Mixed (802.11b/g/n)
Band Width	20MHz
SGL	☒ On ☐ Off
Beacon Interval	100 ms
Transmitting Power	100%

Apply Cancel

▼ 5GHz

Channel	153
Mode	Mixed (802.11a/n/ac)
Band Width	80MHz
SGL	☒ On ☐ Off
Beacon Interval	100 ms
Transmitting Power	100%

Apply Cancel

CUARTO PASO LAN:

- Vamos a la pestaña: Local Network / LAN DHCP Server:

CONEXIONES MÁS FUERTES

Home Internet **Local Network** Management & Diagnosis

Status
WLAN
LAN
Routing
FTP
UPnP
DMS
Samba Service
DNS

IPv4 IPv6

Page Information
This page provides the function of LAN (IPv4) parameter(s) configuration.

▼ Allocated Address (DHCP)

Host Name	MAC Address	IP Address	Port	Remaining Lease
DESKTOP-K4L9GVI	a4:4c:c8:63:9e:69	192.168.1.209	LAN1	23h 27min 20s

Refresh

▼ DHCP Server

DHCP Server ☒ On ☐ Off

LAN IP Address 192 . 168 . 1 . 1

- Configuramos:

DHCP Server: On

LAN IP Address: 192.168.1.1

Subnet Mask: 255.255.255.0

DHCP Start IP Address 192.168.1.200

DHCP End IP Address 192.168.1.255

Primary DNS 200.105.128.40

Secondary DNS 200.105.128.41 (o 8.8.8.8)

- **APPLY**

▼ DHCP Server

DHCP Server ☒ On ☐ Off

LAN IP Address 192 . 168 . 1 . 1

Subnet Mask 255 . 255 . 255 . 0

Secondary IP ☐ On ☒ Off

DHCP Start IP Address 192 . 168 . 1 . 200

DHCP End IP Address 192 . 168 . 1 . 254

ISP DNS ☐ On ☒ Off

Primary DNS 200 . 105 . 128 . 40

Secondary DNS 200 . 105 . 128 . 41

Lease Time Mode Custom

Custom Lease Time 86400 s

QUINTO PASO CAMBIO DE CONTRASEÑA DEL EQUIPO:

- Vamos a: management & Diagnosis / Account Management / Admin Account Management
- Configuramos:
 - Username: admin
 - Old Password: aldm1
 - New password: Aldmt18521112 (numero de nodo + Puerto)
 - Confirmend Password: Aldmt18521112
- APPLY

▼ Admin Account Management

i A strong password should match these rules:

1. It should have at least 6 characters.
2. It should be composed of digits, alphabet and special symbols.
3. It should not have context relationship with the username, such as the same or inverse.

Username

Old Password

New Password Weak

Confirmed Password

SEXTO PASO, REINICIAR:

- Vamos a: management & Diagnosis / System Management / Reboot Management
- Reboot

Home Internet Local Network Management & Diagnosis

Status Account Management Idle Timeout System Management Mirror Configuration TR-069 Log Management Network Diagnosis ARP Table MAC Table

Device Management Software Upgrade User Configuration Management

Page Information

This page provides the function of device management.

▼ Reboot Management

Reboot: Please click the "Reboot" button to reboot the device. This process will take about 5 minutes.

Note: The reboot operation will interrupt all current business.