
PRODUCT REFERENCE MANUAL

DEVLAB PDM AUDIO MODULE

DevLab PDM ICS-41350 MEMS Microphone

MPN: UE0148

Version 0.1.0

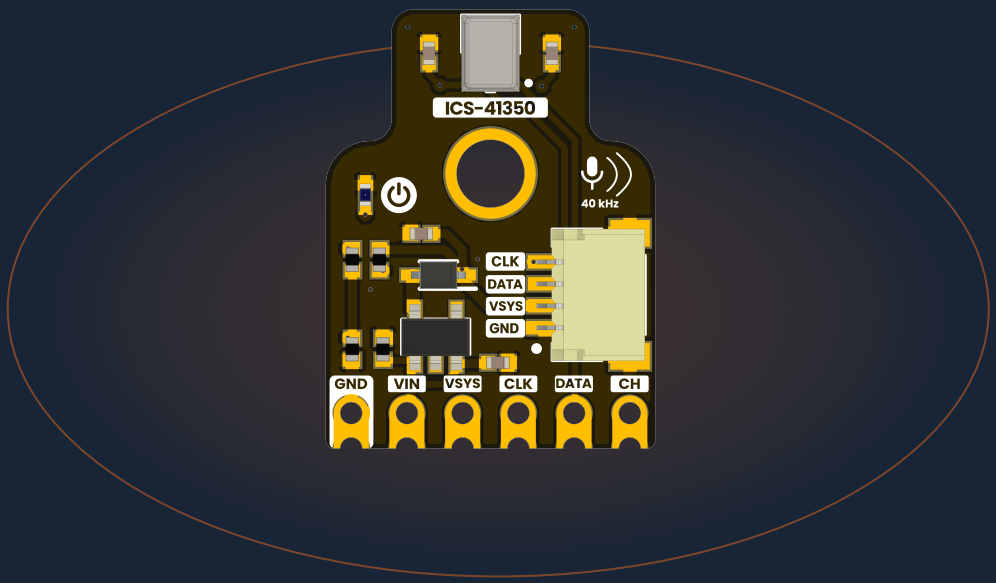

Compact PDM module based on the multi-mode ICS-41350 MEMS microphone, with channel selection and a BOM-identified 3.3 V regulator.

PDM AUDIO | MULTI-MODE | CHANNEL SELECT | MEMS

DOCUMENT MAP

Contents

Description
Applications
Hardware Features

1 The Module
1.1 Board Identification
1.2 Package Contents

2 Electrical Characteristics
2.1 ICS-41350 Characteristics
2.2 Electrical Precautions

3 Functional Overview
3.1 Audio Signal Path
3.2 Operating Modes
3.3 Channel Selection
3.4 Power Section

4 Connectors and Pinout
4.1 Edge Connections
4.2 Four-Position Connector
4.3 Solder Options

5 Board Operation

6 Mechanical Information
6.1 Top View
6.2 Bottom View
6.3 Board Dimensions


7 Company Information

8 Reference Documentation

9 Appendix
9.1 Source Hierarchy
9.2 Items Pending Validation
9.3 Document Control

Description

The UNIT DevLab PDM ICS-41350 MEMS Microphone is a compact digital-audio module built around the bottom-port TDK InvenSense ICS-41350. The microphone contains a MEMS element, impedance-converter amplifier, and fourth-order sigma-delta modulator that produces a 1-bit pulse-density-modulated output.

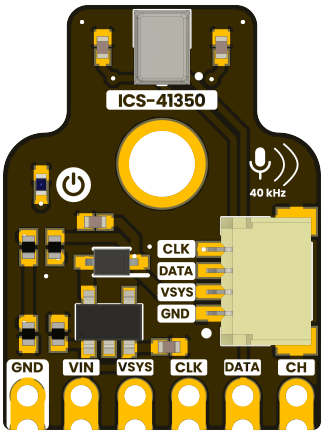

Applications

- Voice capture and recognition prototypes
- Microphone-array development
- Camera, security, and surveillance audio
- Low-power ambient sound analysis and keyword spotting
- Ultrasonic sensing experiments in high-performance mode

Hardware Features

- ICS-41350 bottom-port digital MEMS microphone
- PDM clock and data interface
- Clock-selected low-power, standard, high-performance, and sleep modes
- Sensor channel selection for shared-data stereo configurations
- AP2112K-3.3TRG1 fixed 3.3 V regulator identified by the BOM
- Six 2.54 mm edge/header connections
- Four-position, 1.0 mm-pitch right-angle connector
- Orange indicator LED and two solder options shown on the V1.1 artwork

1 The Module

1.1 Board Identification

Item	Value
Product	DevLab PDM ICS-41350 MEMS Microphone
Manufacturer part number	UE0148
Hardware revision shown	V1.1
Microphone	TDK InvenSense ICS-41350
Digital audio interface	PDM
Product-reference revision	0.1.0

1.2 Package Contents

The manufacturing BOM includes one four-conductor, 1.0 mm-pitch QWIIC-style harness. Confirm purchased-product contents with the distributor. The BOM identifies J2 as a four-position, 1.0 mm-pitch connector, but cable orientation and end-to-end pin order remain pending validation.

2 Electrical Characteristics

2.1 ICS-41350 Characteristics

The values in this section apply to the ICS-41350 sensor. They are not complete module ratings.

Parameter	Low-power mode	Standard mode	High-performance mode	Scope
Clock frequency	400–800 kHz	1.0–3.3 MHz	4.1–4.8 MHz	Sensor CLK
Sensitivity, typical	−26 dB FS	−26 dB FS	−32 dB FS	Sensor, 1 kHz and 94 dB SPL
SNR, typical	63 dBA	64 dBA	64 dBA	Sensor
Supply current, typical	185 µA	430 µA	650 µA	Sensor at VDD = 1.8 V, no load
Acoustic overload point, typical	120 dB SPL	120 dB SPL	126 dB SPL	Sensor, 10% THD

Parameter	Minimum	Typical	Maximum	Scope
Sensor supply voltage, VDD	1.65 V	—	3.63 V	ICS-41350 supply pin
Sleep-mode clock	—	—	Below 200 kHz	ICS-41350 CLK
Sleep current	—	12 µA	20 µA	ICS-41350
Digital input high, VIH	0.65 × VDD	—	—	ICS-41350 digital input
Digital input low, VIL	—	—	0.35 × VDD	ICS-41350 digital input
Regulated output	—	3.3 V nominal	—	U3 identity from BOM; module behavior pending

The permitted voltage at module VIN, the behavior and limits of VSYS, host logic compatibility, and total module current are pending schematic verification and module-level validation. Do not substitute the sensor VDD range, the regulator limits, the diode ratings, or the connector rating for a module input rating.

2.2 Electrical Precautions

- Keep the host and module grounds connected during operation.
- Do not drive DATA; it is the microphone output.
- Apply CLK and CH only after the module power and logic domains have been verified against a released schematic or a measured board.
- Keep the bottom acoustic port free from debris, flux, adhesive, and enclosure obstruction.
- Verify VIN, VSYS, J2 supply routing, and solder-option states before first power-up.

3 Functional Overview

3.1 Audio Signal Path

The ICS-41350 senses pressure through its bottom acoustic port and emits the 1-bit output of a fourth-order sigma-delta modulator on DATA. A host supplies CLK and performs PDM decimation or passes the stream to a compatible codec.

3.2 Operating Modes


The sensor selects its operating mode from the applied clock frequency: below 200 kHz for sleep, 400 to 800 kHz for low power, 1.0 to 3.3 MHz for standard, and 4.1 to 4.8 MHz for high performance. These are ICS-41350 characteristics; tested module and host configurations remain pending validation.

3.3 Channel Selection

At the ICS-41350 SELECT pin, low selects the right channel (DATA1) and high, tied to sensor VDD, selects the left channel (DATA2). The V1.1 board artwork labels an exposed CH connection and a CH SELECTION L/R solder option. Their exact circuit mapping and default state are pending schematic verification.


3.4 Power Section

The BOM identifies an AP2112K-3.3TRG1 regulator, NSR0320MW2T1G Schottky diode, 1 µF power capacitors, a 100 nF microphone decoupling capacitor, an orange indicator LED, and associated resistors. The exact VIN/VSYS path and the LED-enable default remain pending schematic verification.

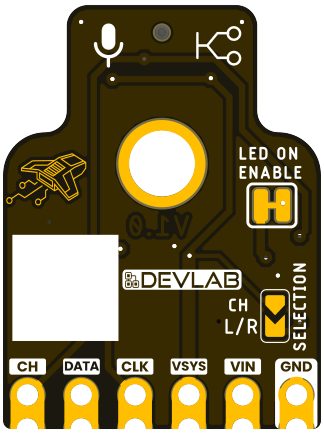

4 Connectors and Pinout

The released pinout shows both board views, the edge labels, and the four-position connector signals. English and Spanish PDFs are linked in Section 8.

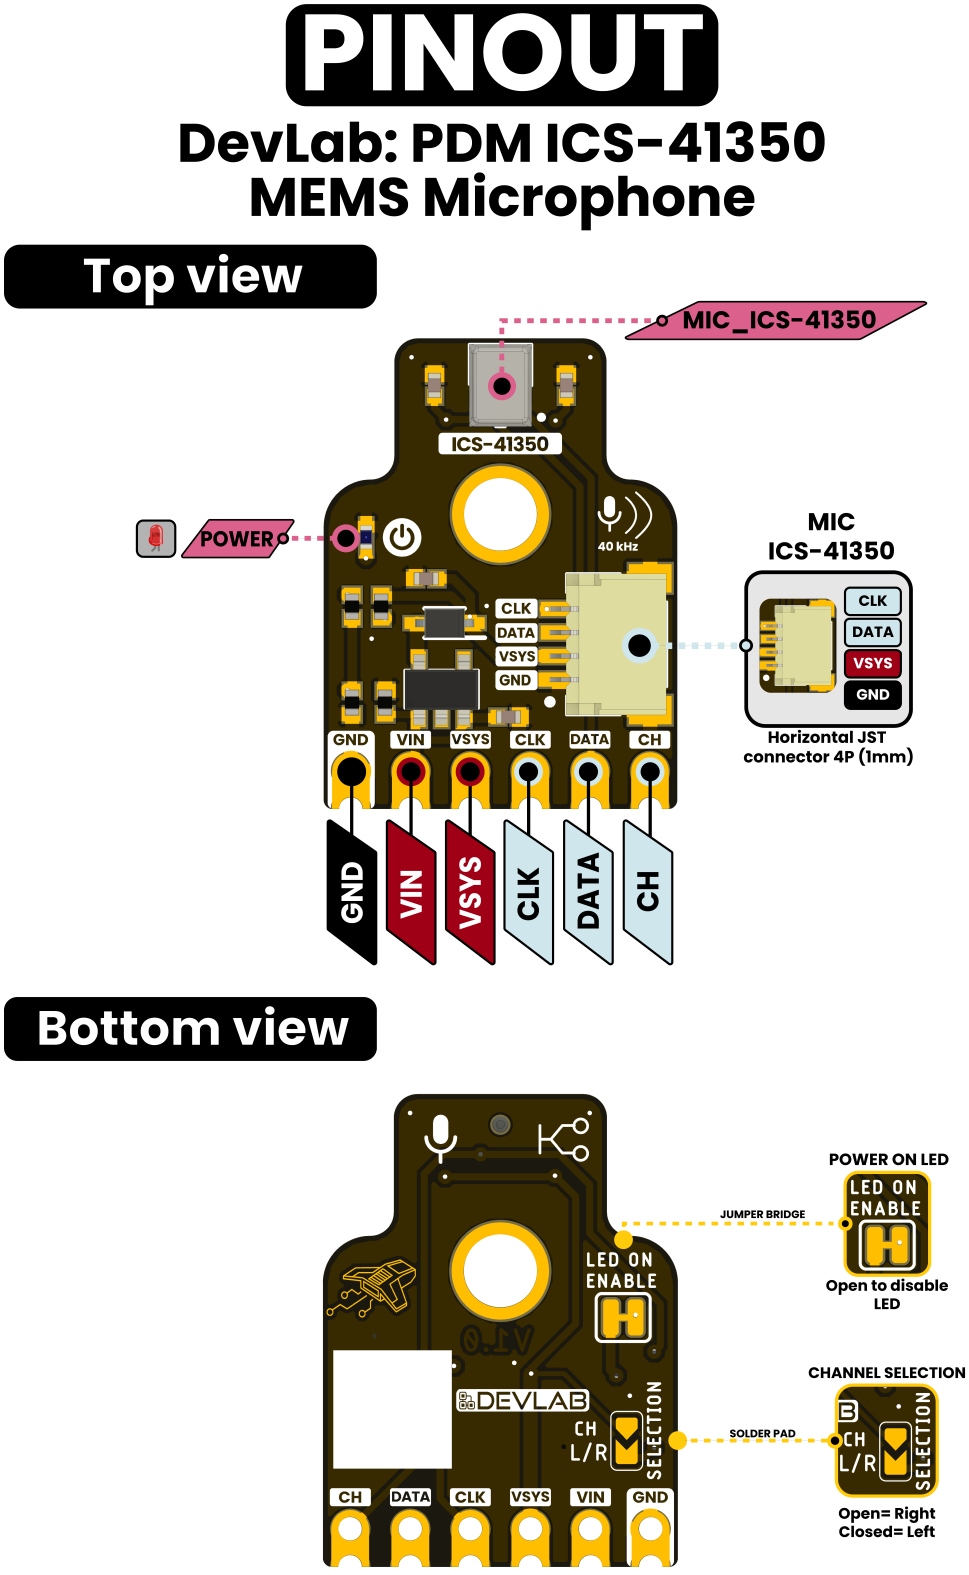

UE0148 pinout, top and bottom views.

4.1 Edge Connections

Board label	Direction	Function
GND	Power	Common ground
VIN	Input	Module power-section input; allowed range pending
VSYS	Power	Module system rail; electrical behavior pending
CLK	Input	PDM clock input
DATA	Output	PDM microphone data
CH	Input	Channel-selection signal; module mapping pending schematic verification

4.2 Four-Position Connector

The V1.1 top artwork labels the connector signals, from top to bottom in the rendered view, as CLK, DATA, VSYS, and GND. The manufacturing BOM calls J2 a four-position, 1.0 mm-pitch right-angle connector. Verify physical orientation before connecting a cable; this edition does not assign connector pin numbers.

4.3 Solder Options

The bottom artwork identifies CH SELECTION L/R and LED ON ENABLE options. Their default copper states and exact circuit connections are pending schematic verification.

5 Board Operation

No firmware example has been validated for this module, so this reference does not present host code as a tested procedure.


For initial bench validation:

1. Inspect the board and ensure the bottom acoustic port is unobstructed.
2. Verify the VIN/VSYS power path, supply range, and logic domain against a released schematic or measured board.
3. Connect host and module grounds.
4. Connect the host PDM clock output to CLK and PDM data input to DATA.
5. Configure the channel only after verifying how board CH and the solder option connect to the ICS-41350 SELECT pin.
6. Apply a clock in the intended ICS-41350 mode range and verify timing with a logic analyzer before relying on captured samples.

Host GPIO numbers are controller-specific and are not module pin numbers. Tested decimation settings, sample rates, host mappings, and module-level logic limits remain pending validation.


6 Mechanical Information

6.1 Top View

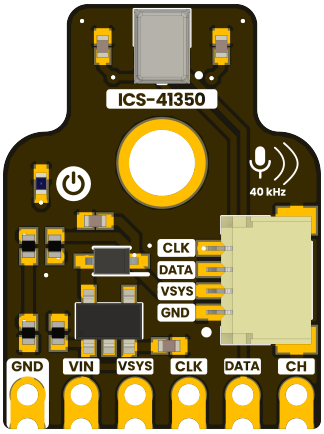

UE0148 PDM microphone top view.


6.2 Bottom View

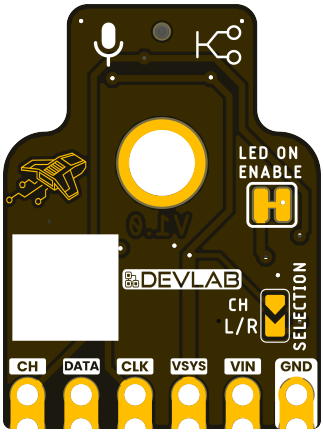

UE0148 PDM microphone bottom view.

Keep the bottom acoustic opening unobstructed by adhesive, debris, or enclosure features.

6.3 Board Dimensions

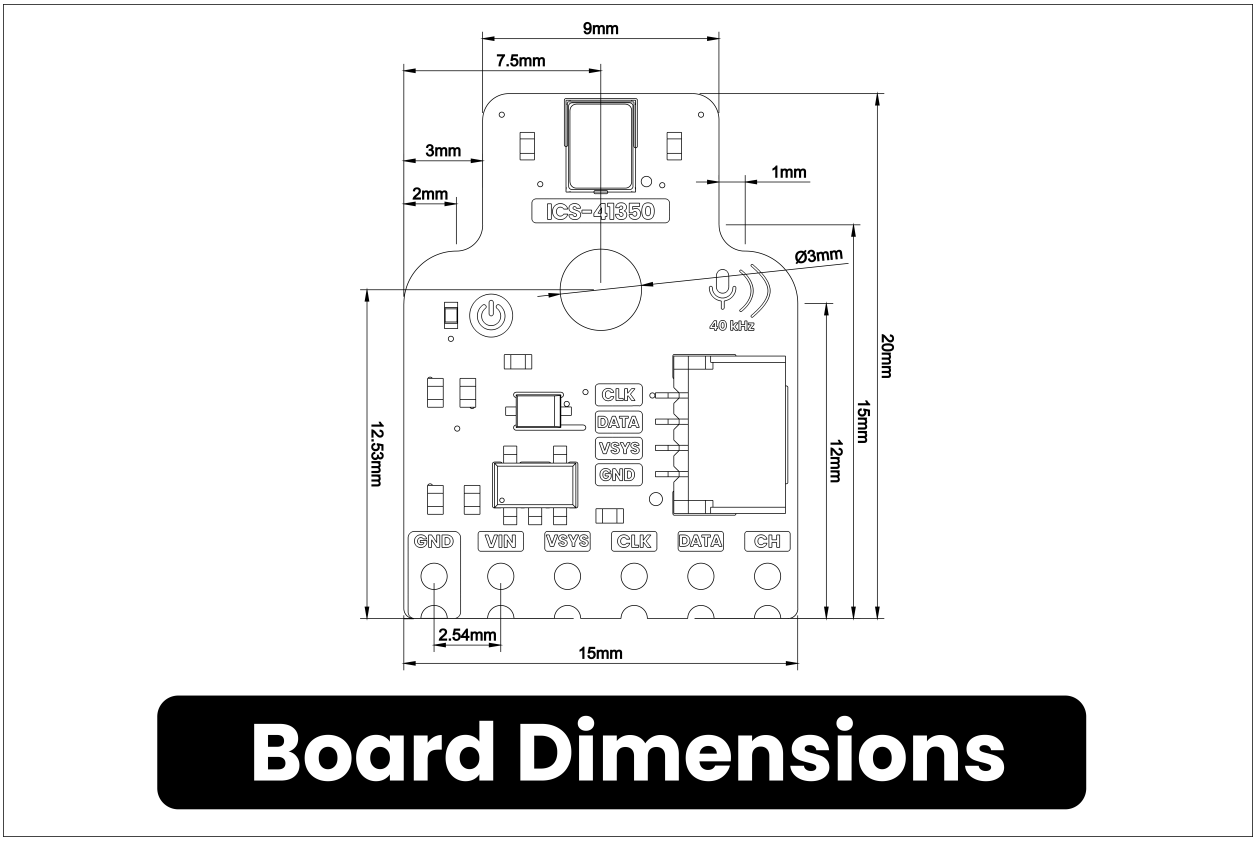

UE0148 PDM microphone dimension drawing.

Use the labeled drawing for mechanical layout. Verify tolerances and connector clearance on the physical assembly before designing a carrier or enclosure.

7 Company Information

Item	Information
Company	UNIT Electronics
Website	https://uelectronics.com/
Address	Salvador 19, Cuauhtémoc, 06000 Mexico City, CDMX, Mexico

Product specifications and documentation may be revised. Use the repository and product page listed in the next chapter for the latest released material.

8 Reference Documentation

Reference	Location
Repository	UNIT-Electronics-MX/ unit_devlab_pdm_ics_41350_mems_microphone
Hardware notes	Hardware README
Pinout PDFs	English · Spanish
Pinout images	English PNG · Spanish PNG
Microphone datasheet	TDK InvenSense ICS-41350
Manufacturing BOM	Reviewed local source; public URL pending
Top view	3D board view
Bottom view	3D board view
CAD model	STEP

The local microphone source is TDK InvenSense document DS-000047, revision 1.1, dated 2016-06-23. Sensor values in this reference come from that document; module component identities come from the manufacturing BOM; visible module labels come from the V1.1 artwork.

9 Appendix

9.1 Source Hierarchy

This product reference follows the V1.1 board artwork for visible signal labels, the manufacturing BOM for fitted component identities, and TDK InvenSense datasheet DS-000047 revision 1.1 for ICS-41350 characteristics. A released module schematic and module-level validation take precedence if they conflict with this edition.

9.2 Items Pending Validation

- Module schematic and controlled connector pin-number drawing
- Module VIN and VSYS operating and absolute-maximum ratings
- Module logic levels and total current consumption
- Tested PDM clock modes, decimation settings, sample rates, and host mappings
- Board dimensions and mounting coordinates
- Solder-option defaults and J2 cable orientation
- Module-level acoustic, environmental, and ultrasonic characterization

9.3 Document Control

Field	Value
Product	DevLab PDM ICS-41350 MEMS Microphone
Manufacturer part number	UE0148
Hardware artwork covered	V1.1
Product-reference revision	0.1.0
Publication date	2026-08-03
Firmware status	No validated example included in this edition