

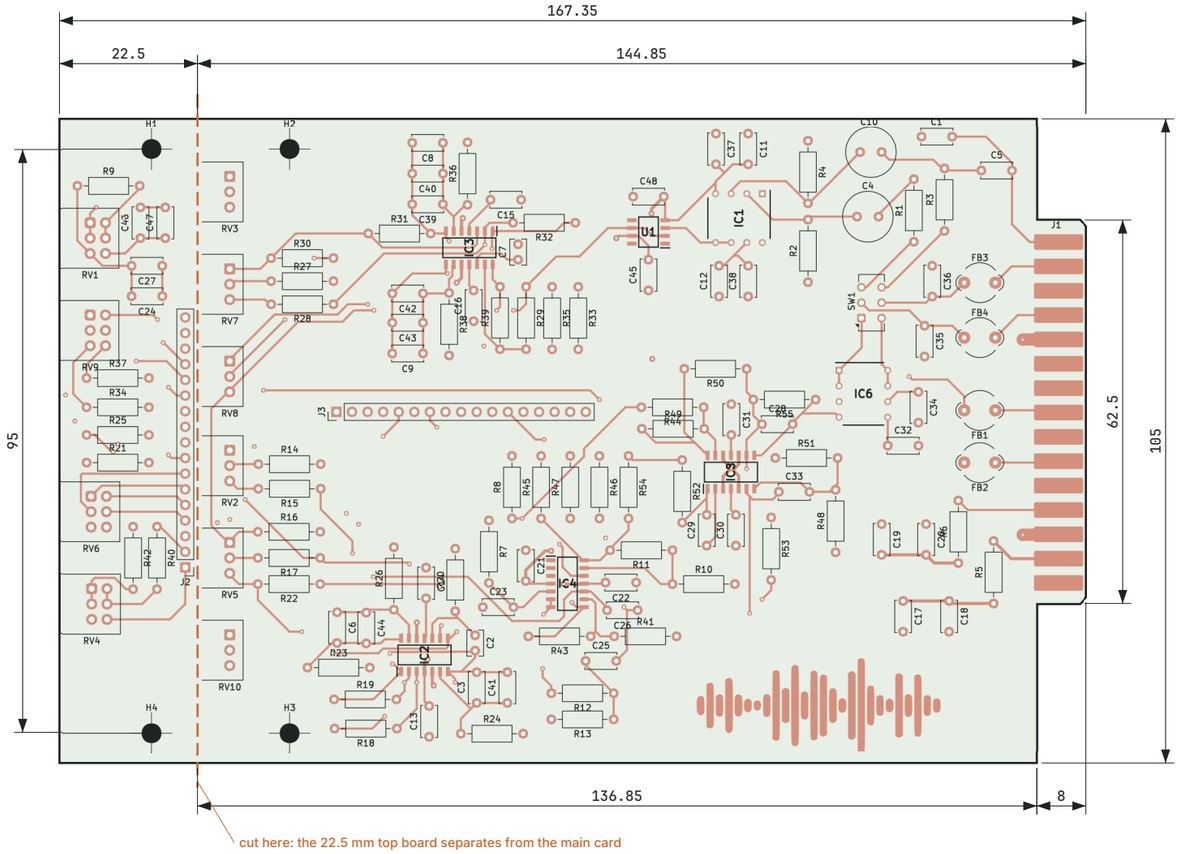


A **TOP · COMPONENT SIDE, AS ORDERED (TWO BOARDS ON ONE PANEL)** SCALE 1:1

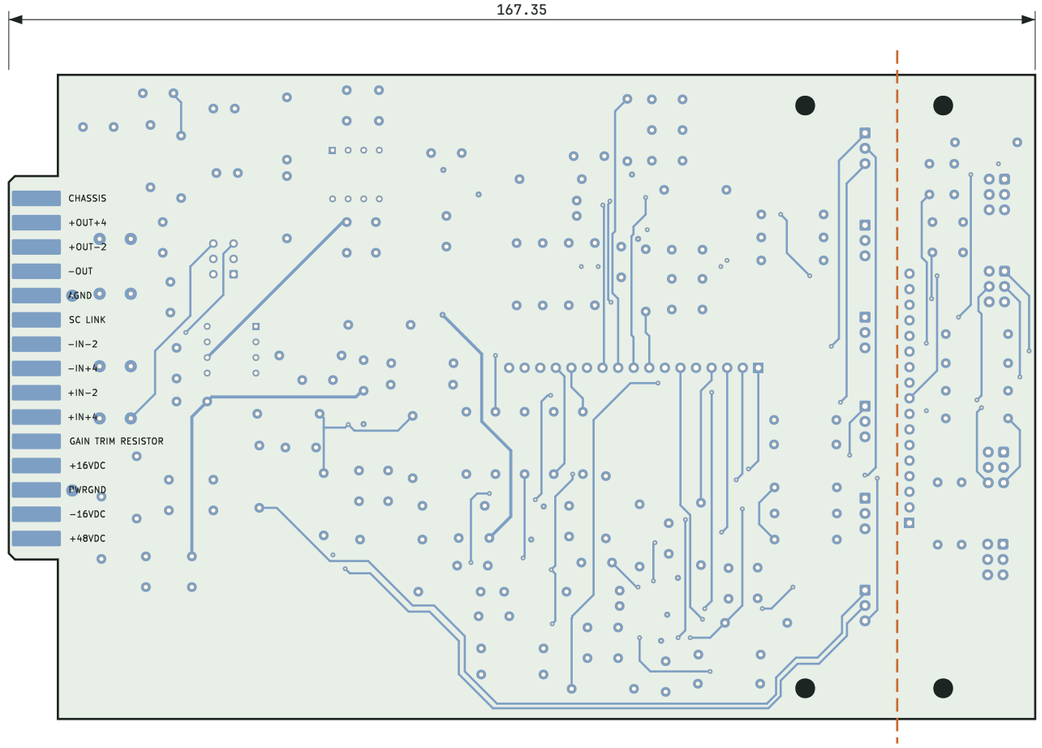


B **BOTTOM · SOLDER SIDE (MIRRORED)** SCALE 1:1

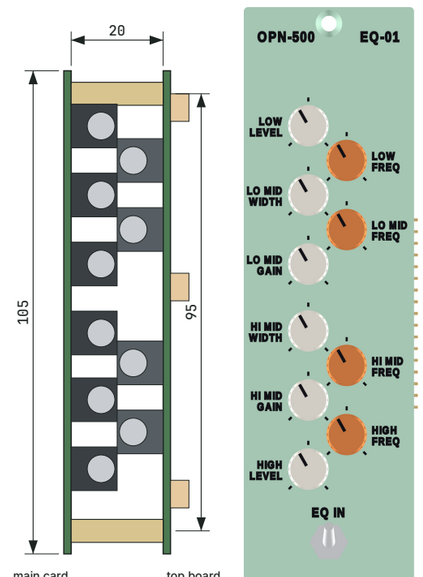


C **STACK** 3:4
seen from the front

D **MOCK-UP PANEL** 3:4

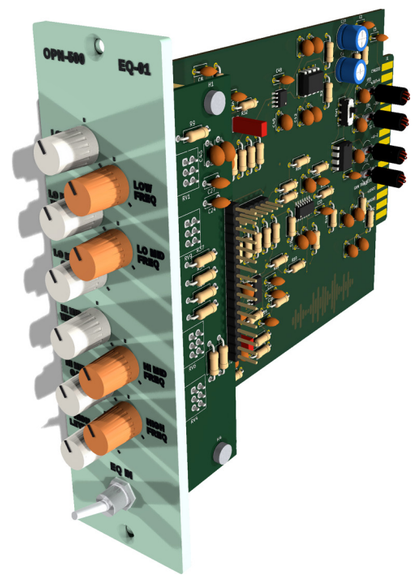

E **ASSEMBLED** 3D

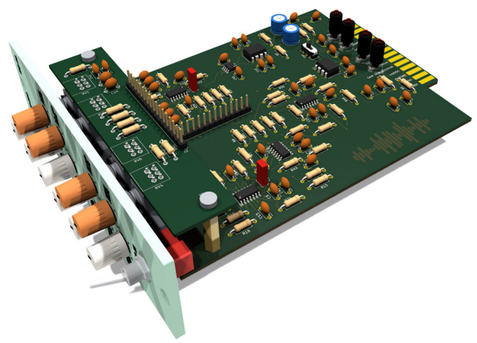

F **FROM ABOVE** 3D
top board on 20 mm standoffs
its pots underneath

BOARD DATA

MAIN CARD	
SIZE	144.85 × 105 mm
STACKUP	4 layers · In1 GND pour · 1.6 mm
TOP BOARD	
SIZE	22.5 × 105 mm
LINK	J2 ↔ J3, 17-pin headers
PANEL AS ORDERED	
PARTS	133 (123 THT, 5 SMD)
MIN TRACK	0.35 mm · vias 71

NOTES

1. Print at 100 % (actual size) on A3: views A and B are 1:1. Dimensions in mm.
2. Ordered as one panel; the front 22.5 mm strip is cut off and mounted 20 mm above the main card on two M3 standoffs. Both boards keep their component side up; the top board's pots are soldered to its underside, giving two staggered knob columns.
3. Top board: the four dual frequency pots. Main card: the six single pots and the audio path. H1-H4 are Ø3.2 mm unplated; standoffs join H1 to H2 and H4 to H3.
4. The front panel (D, E) is a mock-up for the demonstration, styled as the Compressor's printed faceplate: knob centres follow the built pot shafts; the repo has no panel yet.
5. 3D: pot models drawn for the RK097 footprints; the TI op amps use stock SOIC/DIP models.
6. Copper: top layer red, bottom layer blue, holes white. Edge-finger names are shown in B only: on the top side the board prints them over FB1-FB4, R5, R6 and C20.

UTS 500 SERIES

UTS 500 SERIES · API 500 MODULE · PCB DRAWING

SHEET 3 / 3

EQUALISER

Main card and top board, stacked on standoffs

SOURCE github.com/UTS-500-Series/Equaliser	REVISION 4d106d3 · board 2026-10-08	DATE 2026-10-21
BOARD Combined_EQ/Combined_EQ.kicad_pcb	SCALE 1:1 unless noted	SIZE · UNITS A3 · mm
LAYERS 4 copper	TOOL KiCad 10 (drawn in 9)	LICENCE CERN-OHL-S v2