3.0 x 3.0 x 1.3 mm
RoHS/RoHS II Compliant
MSL Level = N/A

Features

- SMD Mount Filter
- Compact Package Size

Applications

- ISM Band Applications
- LoRa, Sigfox, NB-IoT
- Metering, Security, Smart Home

Electrical Characteristics

Parameters		Specifications		
		Min	Typ.	Max
Nominal Center Frequency (Fc) (MHz)			869.000	
3dB Bandwidth (MHz)			12	
Insertion Loss (dB) (868.0 MHz ~ 870.0 MHz)			2.0	2.5
Amplitude Ripple (dB)(868.0 MHz ~ 870.0 MHz)				1.0
Absolute Attenuation (relative to α) (dB)	769.00 ~ 840.00 MHz	36	46	
	882.00 ~ 925.00 MHz	15	18	
	925.00 ~ 969.00 MHz	40	50	
Impedance (Ω)	Zs		50	
	Z_l		50	
Source Power (Ps) (dBm)			13	
DC Voltage (Vdc) (V)			12	


Mechanical Specifications

Parameters	Specifications
Filter Dimension	3.00 x 3.00 x 1.3 mm
Mounting Type	SMD Mount

Maximum Ratings


Rating	Value
Operating Temperature Range (TA)	-10°C ~ +65°C
Storage Temperature Range (Tstg)	-40°C ~ +85°C

Package Dimensions

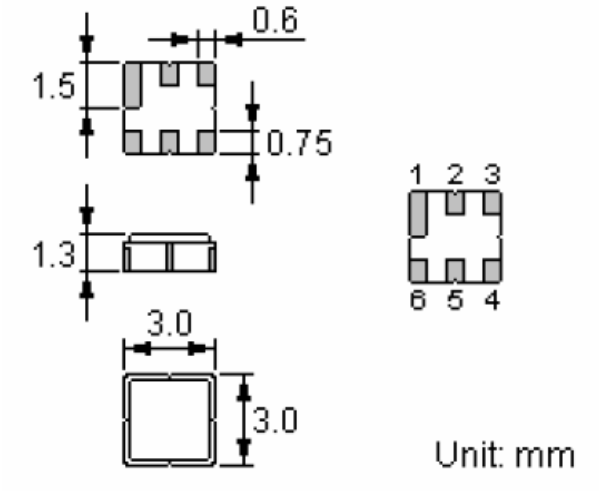


Pin	Configuration
2	Input
5	Output
1, 3, 4, 6	Case Ground


Recommended Land Pattern




Matching Circuit

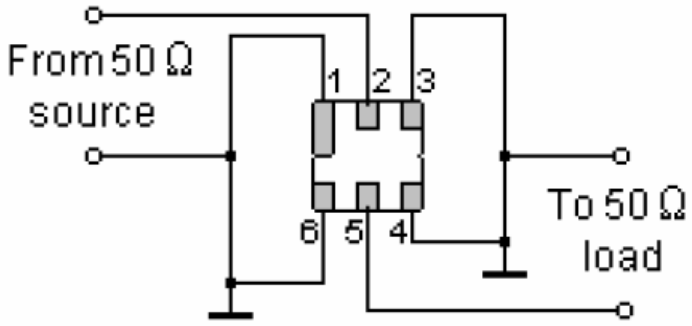


Frequency Response

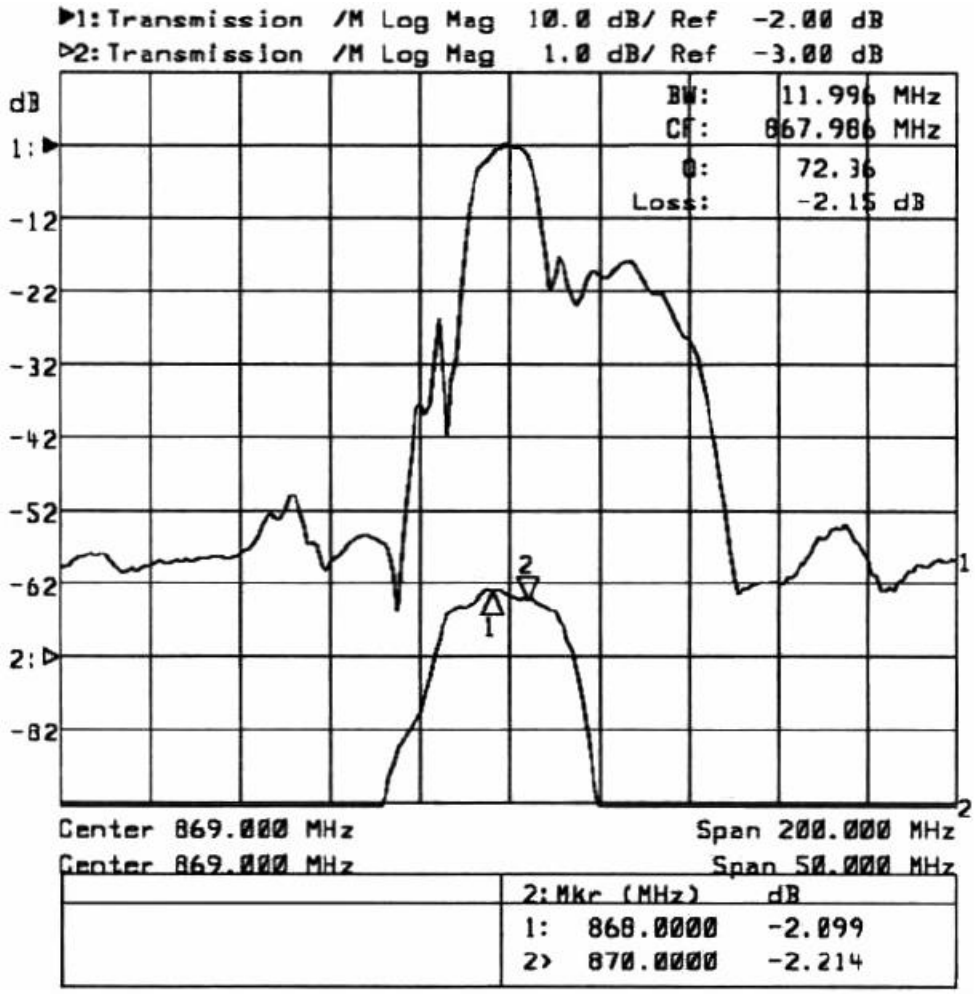

TAPE SPECIFICATIONS (mm)						
A	B	C	D	E	F	REEL QTY
ø1.55	4.0	4.0	5.5	12.0	1.6	1,000

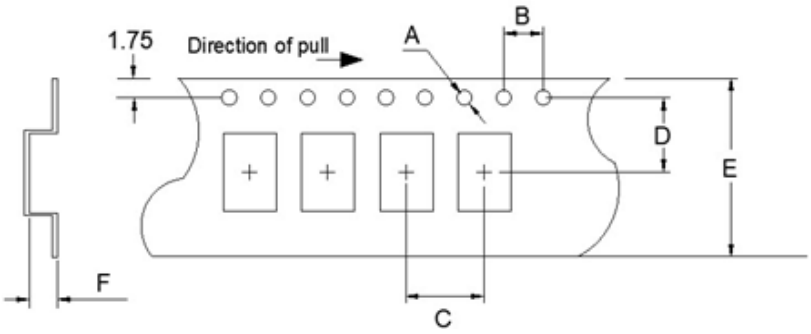

REEL SPECIFICATIONS (mm)						
G	H	I	J	K	L	M
2.0	ø13	Ø21	Ø60.5	Ø177.4	13.10	1.6

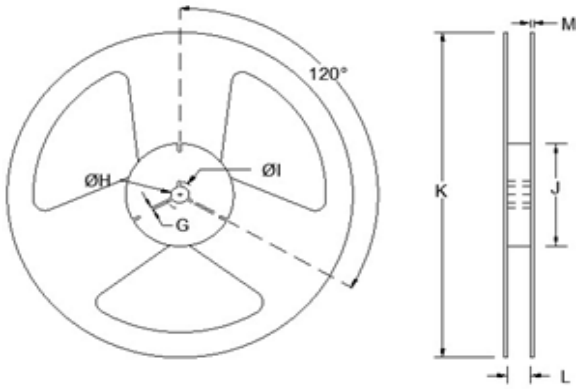

LINE	MARKING
1	NDF
2	8034

RELIABILITY TEST CONDITIONS
Please contact Abracon Quality Assurance department