

Dept / Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1


The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNFLY or its affiliates. Unauthorized use or modification is strictly prohibited without prior written consent from CONNFLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

Single Row
N:Number Of Contacts
A/B:Customer Length Available

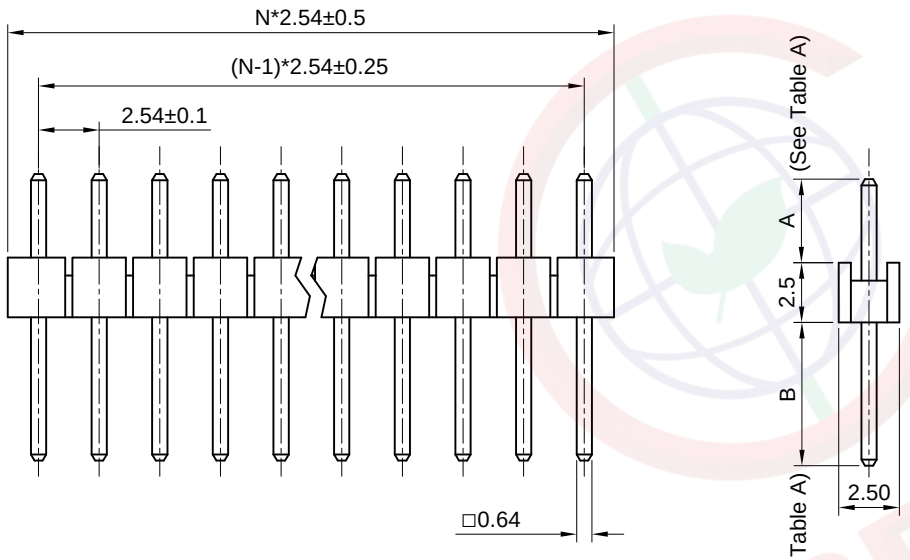

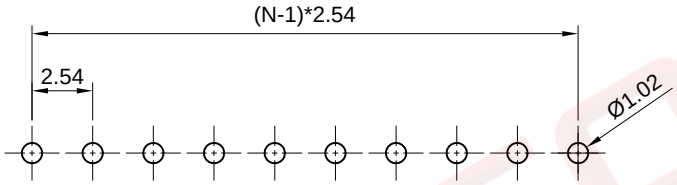

Recommend PCB Layout

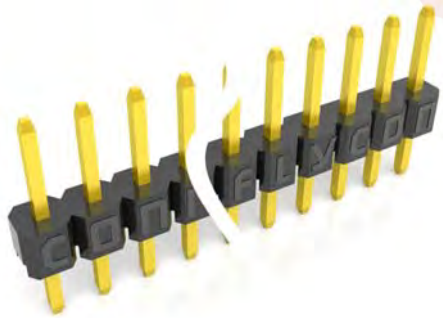

(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/03/06'		LJC 07/03/06'
O	DRAWING UPDATE	JLZ 09/18/18'		
P	DRAWING UPDATE	JLZ 06/08/21'		

Notes:
1.Electrical Characteristics:
1.1 Contact Resistance: 20mΩ Max.
1.2 Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.
1.3 Insulation Resistance: 1000MΩ Min.
1.4 Current Rating:3A.
1.5 Voltage Rating:250V AC rms.
2.Environment Characteristics:
2.1 Temperature: -40°C~+105°C.
3.Materials:
3.1 Contact Material: Copper Alloy.
3.2 Contact Plating: Gold Plating Over Nickel.
3.3 Insulator Materials: PBT,Black,UL94-V0.
4.Product Number Code:

DS1021– X X X X – X

- Plating Level
  3A: Level 3A B: Level B
  N: Level N
- Table A & B Dim.Type
  1: Type 1
  2: Type 2
  or -A*.*-B*.*
- Contact Plating
  F1: Full Gold Flash
- Mounting Type
  S: Straight Type
- No. Of Contacts
  1x1~1x40

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 2
DRAWING NO.	C–DS1021–XXXXX–X–O		

PROJECTION		TITLE	2.54mm Pin Header V/T Type Single Row
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1021 SERIES

晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD

Dept / Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNFLY or its affiliates. Unauthorized use or modification is strictly prohibited without prior written consent from CONNFLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

TABLE A:

TYPE	Dimension A	Dimension B
1	3.00	6.10
2	0.00	9.15
3	0.00	12.50
4	0.00	21.50
5	3.00	12.50
6	3.00	3.00
7	3.00	17.30
8	2.50	5.80
9	3.00	7.10
10	3.00	8.30
11	3.00	9.30
12	3.00	12.30
13	0.40	7.30
14	3.00	14.50
15	3.00	5.30
16	3.00	3.50
17	0.00	9.00
18	6.00	11.50
19	3.00	18.80
20	3.00	10.50
21	6.25	6.25
22	3.00	12.10
23	3.00	11.50
24	3.00	13.50
25	3.00	8.50
26	3.00	15.50
27	3.00	17.50
28	3.00	20.50
29	3.00	8.90

TABLE A:

TYPE	Dimension A	Dimension B
30	3.20	19.40
31	5.00	12.50
32	3.00	9.50
33	3.00	19.50
34	3.00	29.50
35	3.00	6.96
36	3.00	5.96
37	3.00	5.50
38	3.00	14.30
39	3.00	15.90
40	3.00	21.50
41	3.34	13.96
42	3.50	22.00
43	3.00	24.50
44	3.00	34.50
45	3.00	18.50
46	3.00	8.00
47	6.00	6.00
48	3.00	7.50
49	3.00	5.00
50	3.00	9.00
51	3.00	11.00
52	3.20	14.20
53	3.00	23.50
54	3.00	9.46
55	3.00	16.50
56	0.60	8.50
57	3.00	28.50
58	3.30	15.60

TABLE A:

TYPE	Dimension A	Dimension B
59	3.00	30.50
60	4.00	4.00
61	2.00	4.00
62	3.00	6.50
63	3.00	10.00
64	2.00	4.50
65	1.00	4.50
66	4.00	6.00
67	3.00	4.00
68	4.50	7.00
69	3.00	15.00
70	4.50	4.50
71	2.50	25.00
72	3.50	24.00
73	3.00	4.50
74	3.50	17.00
75	3.50	13.00
76	3.50	9.00
77	3.50	6.10
78	3.10	15.40
79	5.50	9.00
80	5.50	13.00
81	3.50	5.60
82	8.60	8.60
83	3.30	6.80
84	3.10	6.00
85	2.50	3.50
86	3.00	22.50
87	3.00	12.00

TABLE A:

TYPE	Dimension A	Dimension B
88	4.20	7.80
89	1.60	5.80
90	5.00	12.00
91	4.20	4.20
92	1.20	12.30
93	5.33	5.84
94	5.84	15.49
95	1.50	5.80
96	3.50	3.50
97	3.00	26.50
98	0.00	6.00
99	3.00	20.00
100		
101	2.85	4.15
102	8.00	2.70
103	3.00	25.00

TABLE A:

TYPE	Dimension A	Dimension B

TABLE A:

TYPE	Dimension A	Dimension B

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	2 OF 2
DRAWING NO.	C-DS1021-XXXXX-X-O		

PROJECTION		TITLE	2.54mm Pin Header V/T Type Single Row
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1021 SERIES


晨翔电子有限公司


CONNFLY ELECTRONIC CO. LTD


Dept / Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNFLY or its affiliates. Unauthorized use or modification is strictly prohibited without prior written consent from CONNFLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.


Doubla Row
N:Number Of Contacts/2
C/D:Customer Length Available

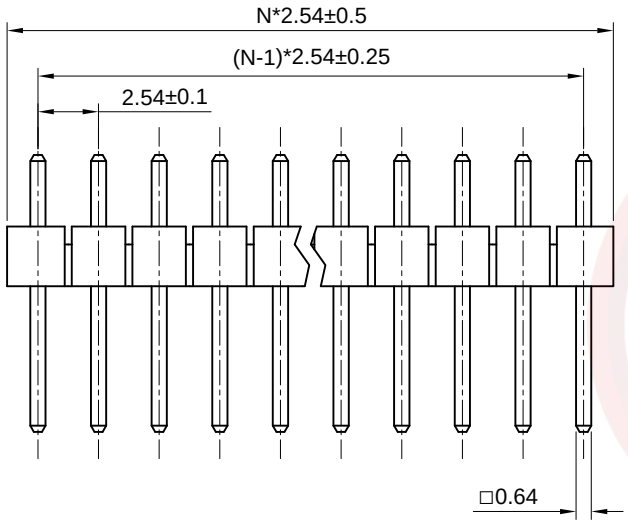

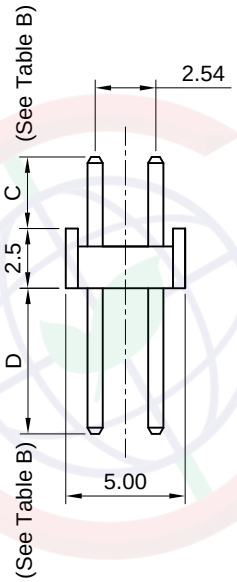

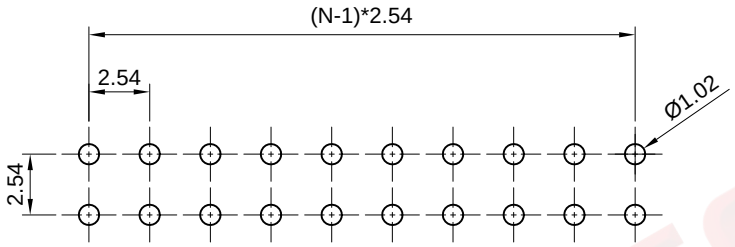

Recommend PCB Layout

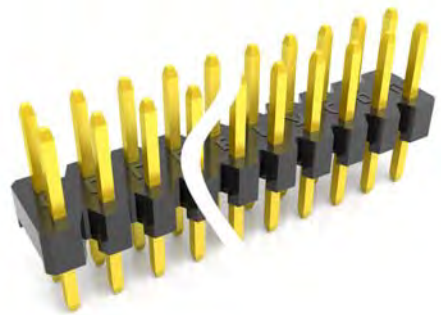

(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/03/06'		LJC 07/03/06'
O	DRAWING UPDATE	JLZ 09/18/18'		
P	DRAWING UPDATE	JLZ 06/08/21'		

Notes:
1.Electrical Characteristics:
1.1 Contact Resistance: 20mΩ Max.
1.2 Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.
1.3 Insulation Resistance: 1000MΩ Min.
1.4 Current Rating:3A.
1.5 Voltage Rating:250V AC rms.
2.Environment Characteristics:
2.1 Temperature: -40°C~+105°C.
3.Materials:
3.1 Contact Material: Copper Alloy.
3.2 Contact Plating: Gold Plating Over Nickel.
3.3 Insulator Materials: PBT,Black,UL94-V0.
4.Product Number Code:

DS1021– X X X X – X

- Plating Level
  3A: Level 3A B: Level B
  N: Level N
- Table C & D Dim.Type
  1: Type 1
  2: Type 2
  or -C*.*-D*.*
- Contact Plating
  F1: Full Gold Flash
- Mounting Type
  S: Straight Type
- No. Of Contacts
  2x1~2x40

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 2
DRAWING NO.	C–DS1021–XXXXX–X–O		

PROJECTION		TITLE	2.54mm Pin Header V/T Type Double Row
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1021 SERIES

晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD

Dept / Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNFLY or its affiliates. Unauthorized use or modification is strictly prohibited without prior written consent from CONNFLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

TABLE B:

TYPE	Dimension	
	C	D
1	3.00	6.10
2	3.00	7.50
3	3.00	10.50
4	0.00	13.50
5	2.50	5.80
6	3.00	7.10
7	3.00	8.30
8	3.00	9.30
9	3.00	12.30
10	3.00	14.50
11	3.00	5.30
12	3.00	14.30
13	3.00	11.50
14	3.00	13.50
15	2.50	16.00
16	3.00	3.00
17	3.00	9.50
18	3.00	19.50
19	6.00	15.40
20	3.00	5.96
21	3.00	6.96
22	3.00	15.90
23	3.00	24.50
24	3.00	29.50
25	3.00	34.50
26	3.00	8.50
27	3.00	18.50
28	3.00	12.50
29	4.00	10.50

TABLE B:

TYPE	Dimension	
	C	D
30	3.00	16.50
31	3.00	21.50
32	3.24	8.16
33	2.20	6.10
34	3.50	11.00
35	3.00	5.50
36	3.00	4.50
37	3.30	15.60
38	3.00	17.30
39	3.00	30.50
40	3.00	15.50
41	3.00	6.50
42	2.50	10.00
43	2.41	12.07
44	3.00	25.00
45	4.00	6.00
46	3.00	15.00
47	2.46	5.70
48	3.00	16.10
49	3.00	11.96
50	6.50	12.00
51	3.00	8.96
52	3.00	9.00
53	4.25	4.25
54	3.50	9.50
55	3.10	6.00
56	8.70	6.00
57	4.20	7.80
58	3.30	6.80

TABLE B:

TYPE	Dimension	
	C	D
59	3.00	12.40
60	3.00	14.30
61	5.00	16.50
62	3.00	5.00
63	5.33	5.84
64	5.84	15.49
65	3.00	3.50
66	20.00	3.00
67	5.33	5.84
68	5.50	3.30
69	3.50	14.00
70	6.00	10.00

TABLE B:

TYPE	Dimension	
	C	D

TABLE B:

TYPE	Dimension	
	C	D

TABLE B:

TYPE	Dimension	
	C	D

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	2 OF 2
DRAWING NO.	C-DS1021-XXXXX-X-O		

PROJECTION		TITLE	2.54mm Pin Header V/T Type Double Row
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1021 SERIES

晨翔电子有限公司


CONNFLY ELECTRONIC CO. LTD


Dept / Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1


The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNFLY or its affiliates. Unauthorized use or modification is strictly prohibited without prior written consent from CONNFLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/03/06'		LJC 07/03/06'
O	DRAWING UPDATE	JLZ 09/18/18'		
P	DRAWING UPDATE	JLZ 06/08/21'		

Three rows
N:Number of contacts/3
E/F:Customer length available

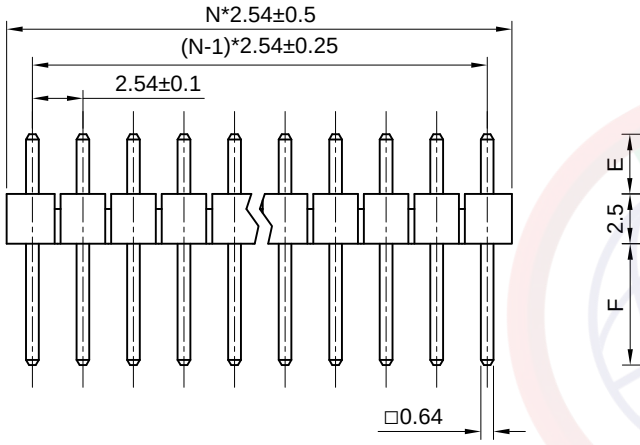

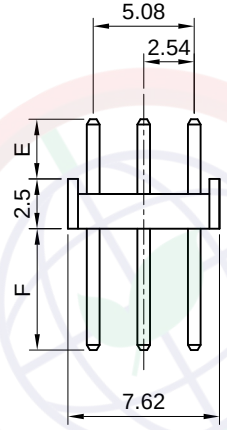


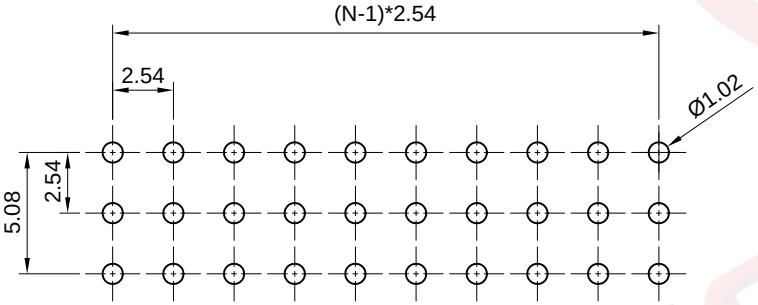

Recommend PCB Layout

TABLE C:

TYPE	Dimension	
	E	F
1	3.00	6.10
2	7.15	7.15

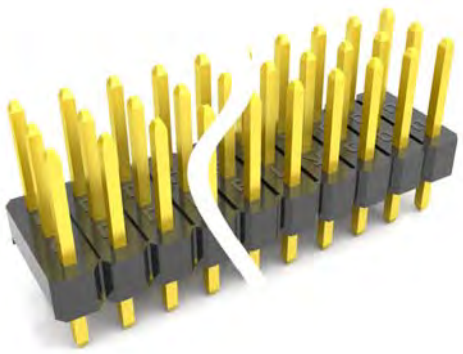

(Series Image-Reference Only)

Notes:
1.Electrical Characteristics:
1.1 Contact Resistance: 20mΩ Max.
1.2 Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.
1.3 Insulation Resistance: 1000MΩ Min.
1.4 Current Rating:3A.
1.5 Voltage Rating:250V AC rms.
2.Environment Characteristics:
2.1 Temperature: -40°C~+105°C.
3.Materials:
3.1 Contact Material: Copper Alloy.
3.2 Contact Plating: Gold Plating Over Nickel.
3.3 Insulator Materials: PBT,Black,UL94-V0.
4.Product Number Code:

DS1021– X X X X – X

- PLATING LEVEL
  3A: Level 3A B: Level B
  N: Level N
- Table C & DIM. type
  1: Type 1
  2: Type 2
  .....
  or -E*.*-F*.*
- Contact plating
  F1: Full gold flash
- Mounting type
  S: Straight type
- No. of contacts
  3x1~3x40

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C–DS1021–XXXXX–X–P		

PROJECTION		TITLE	2.54mm Pin Header V/T Type Three Rows
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1021 SERIES

晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD