




Double
Infrared Mode




0-299
Sensitivity Level



20 min Quick
Assemble & Disassemble



4 Digit
Password Protected



Digital Circuit
Design, anti Interface



Completely
Harmless to
Humans



33 ZONE DFMD

TW-D2333

- Double infrared detector, digital circuit design, anti-interference.
- Detects in 33 zones.
- Adjustable sensitivity can be adjusted from 0 to 99 as per the required inferences such as the adjustment to avoid the coins, keys, buckle, etc.
- The function of statistics: show the number of passed examinees and the alarm times.
- Easy to operate: the operation panel is covered by thin plastic, Bright light alarm can be shown in the warning zones directly and find the precise position of the target metal.
- Both light and auditory alarms can make the warning clear, and improves work efficiency.
- No harm to people: The gate is harmless to people with cardiac pacemakers, pregnant women, tapes, videotapes, etc.
- Convenient installation: Integrated design, you can assemble or disassemble it in 20 minutes with the operation instruction.



(+91)-11-41916615
+91-95999-53923



D-162, Okhla Industrial Area
Phase I, New Delhi, 110020



sales@timewatchindia.com
www.timewatchindia.com

Specification

General Specification

| | |
|------------------------|---|
| Outer Frame | 2220mm(H) x820mm(W)x500mm(D) |
| Inner Frame | 2000mm(H)x700mm(W)x500mm(D) |
| Electrical Current | AC100V~240V 50/60Hz |
| Power | 10W |
| | 90KG |
| Signal Frequency | 7000-8999Hz(adjustable) |
| Work Environment | -20C to +45C |
| Sensitivity Adjustable | Level 0-299 |
| Alarm | Sound and light |
| Max Distance | 0.3m at low sensitivity; 0.5m at high sensitivity |

Configuration

| | |
|--------------------------------|--|
| Master Control Board | Metal-detect-door-main bd, REV120 |
| Digital Keypad | A&C door panel board, REV030 |
| Digital Display Location Board | A&C door zone board, REV030 |
| Speaker | Loudspeaker, 8 2W, Black, 75mmx32mmx27mm |


Software

| | |
|-------------------|---|
| Operation Way | Remote control only |
| Sensibility | With the highest sensibility, it can detect the metal article as small as the clip. With the sensibility range of 0-100, it can be easily adjusted, pre-set the weight, volume, size and location in respect of the metal Articles and eliminate the false alarming for the coin, key, jewelry, leather belt button, etc. |
| Infrared Counting | Intelligent counter can calculate the number of Passenger flows and the times of alarm. |
| Alarm Setting | 33 kinds of alarm sound |



| | |
|--------------------------------|---|
| Detecting Areas | Allocation of thirtythree mutual over-lapping detecting areas, simultaneous alarming from multi-areas and accurately ascertaining the location of the metal articles according to the layout of the metal particles |
| Operating Environment | |
| Operation Temperature/Humidity | 5 °C-40 °C/0%-90% (non-condensing) |
| Storage Temperature/Humidity | -20 °C-55 °C/0%-98% (non-condensing) |
| Operation Power | 220V AC(±10%) 50±3Hz (Optional: 100V AC, 110V AC, 120V AC, 200V AC) |

Dimensional Drawing

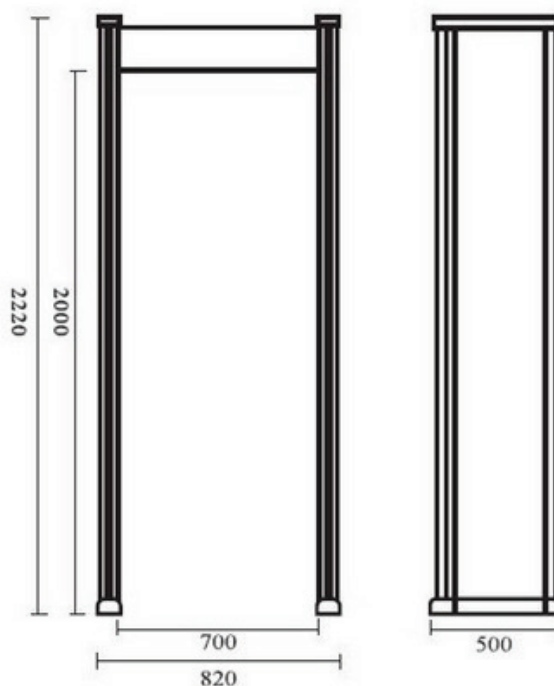

Head Office : D-162, Okhla Industrial Area Phase I,
New Delhi, 110020.



Regional Office : Mumbai, Bengaluru, Ahmedabad,
Chennai, Kolkata.

International Office : Dubai



Phone : +91-95999-53923



Sales : sales@timewatchindia.com



Support : helpdesk@timewatchindia.com

Disclaimer : All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may change without prior notice. Please consult us before placing any order.