

PALCONN

PALCONN TECHNOLOGY

PALCONN

Contents

P2 About Palconn

P3 Approvals

P4 PEX Tubing for Potable Water

P5 EVOH PEX Oxygen Barrier Pipe

P7 F1807 PEX Crimp Fittings

P9 F1807 PEX Valves

P13 F2159 PEX PPSU Fittings

P16 PEX F1960 Fittings

P18 PEX PPSU F1960 Fittings

P21 PEX Push-fit Fittings

P24 PEX-AL-PEX Pipe

P25 PEX-AL-PEX Pipe Fittings

P28 Manifold

P30 PEX Outlet Boxes

P31 Tools

P32 PVC sch40 Water Pipe & Fittings

P35 PVC sch40 Water Pipe & Fittings

P39 PVC DWV Pipe & Fittings

Company profile

Mission

Making The World A Comfortable Home

Value

Integrity, Friendship, Innovation, Win-Win

Founded in 2007, Palconn is a global manufacturer of high-performance polymer piping systems for building and infrastructure applications. We combine product engineering, precision manufacturing, and international compliance to deliver reliable, code-approved system solutions for residential, commercial, industrial, and municipal projects. Our systems are engineered for long-term durability, installation efficiency, and lifecycle performance in HVACR, plumbing, gas, and utility networks.

Palconn products are exported to 85 countries worldwide, supported by stable production capacity and strong technical expertise.

Manufacturing Strength

Palconn operates a modern manufacturing base built for process stability, dimensional precision, and large-scale global supply, ensuring consistent performance and full project accountability.

Annual Capacity: 350+ million meters of polymer piping

High-speed extrusion lines with Siemens PLC control

Precision gravimetric feeding systems

Tight tolerance control & uniform wall thickness

Integrated in-line and laboratory testing

Full production traceability for quality documentation

Global Certifications & Compliance

Palconn products meet international requirements for potable water safety, mechanical performance, and building code compliance, helping reduce project risk across global markets.

Major Certifications

North America: NSF · UPC · CSA

United Kingdom: WRAS

Australia: WaterMark · StandardsMark

Europe: ACS · KTW · CE · RoHS · REACH

Tested by SGS · TUV · Intertek

Management Systems: ISO 9001 · ISO 14001 · ISO 45001

System Solutions

Palconn provides integrated piping platforms that improve installation efficiency and system reliability:

HVACR Systems — Heating · Cooling · Radiant · Hydronic

Water Supply & Plumbing — Potable and pressure systems

Gas Distribution — Certified residential & commercial gas piping

Drainage & Wastewater — Building and municipal drainage

Irrigation & Utility — Agricultural & municipal water transfer

Electrical Conduit — PVC conduit and protection systems

Components & Accessories — Brass fittings, manifolds, tools

Your Global Manufacturing Partner

Engineering expertise. Manufacturing scale. Certified reliability. Stable supply. Palconn delivers dependable piping systems for global infrastructure development.



Approvals



PEX Potable Water Pipe



Specification	Length
1/8"	250ft/300ft/500ft/1000ft
1/4"	250ft/300ft/500ft/1000ft
3/8"	100ft/250ft/300ft/500ft/1000ft
1/2"	100ft/250ft/300ft/500ft/1000ft
5/8"	100ft/250ft/300ft/500ft/1000ft
3/4"	100ft/250ft/300ft/500ft/1000ft
1"	100ft/250ft/300ft/500ft/1000ft
1-1/4"	100ft/250ft/300ft/500ft
1-1/2"	100ft/250ft/300ft/500ft
2"	100ft



Specification	Length
1/8"	5ft/10ft/20ft
1/4"	5ft/10ft/20ft
3/8"	5ft/10ft/20ft
1/2"	5ft/10ft/20ft
5/8"	5ft/10ft/20ft
3/4"	5ft/10ft/20ft
1"	5ft/10ft/20ft
1-1/4"	5ft/10ft/20ft
1-1/2"	5ft/10ft/20ft
2"	5ft/10ft/20ft




PALCONN



EVOH PEX Oxygen Barrier Pipe For Radiant & Floor Heating



Specification	Length
1/8"	250ft/300ft/500ft/1000ft
1/4"	250ft/300ft/500ft/1000ft
3/8"	100ft/250ft/300ft/500ft/1000ft
1/2"	100ft/250ft/300ft/500ft/1000ft
5/8"	100ft/250ft/300ft/500ft/1000ft
3/4"	100ft/250ft/300ft/500ft/1000ft
1"	100ft/250ft/300ft/500ft/1000ft
1-1/4"	100ft/250ft/300ft/500ft
1-1/2"	100ft/250ft/300ft/500ft
2"	100ft

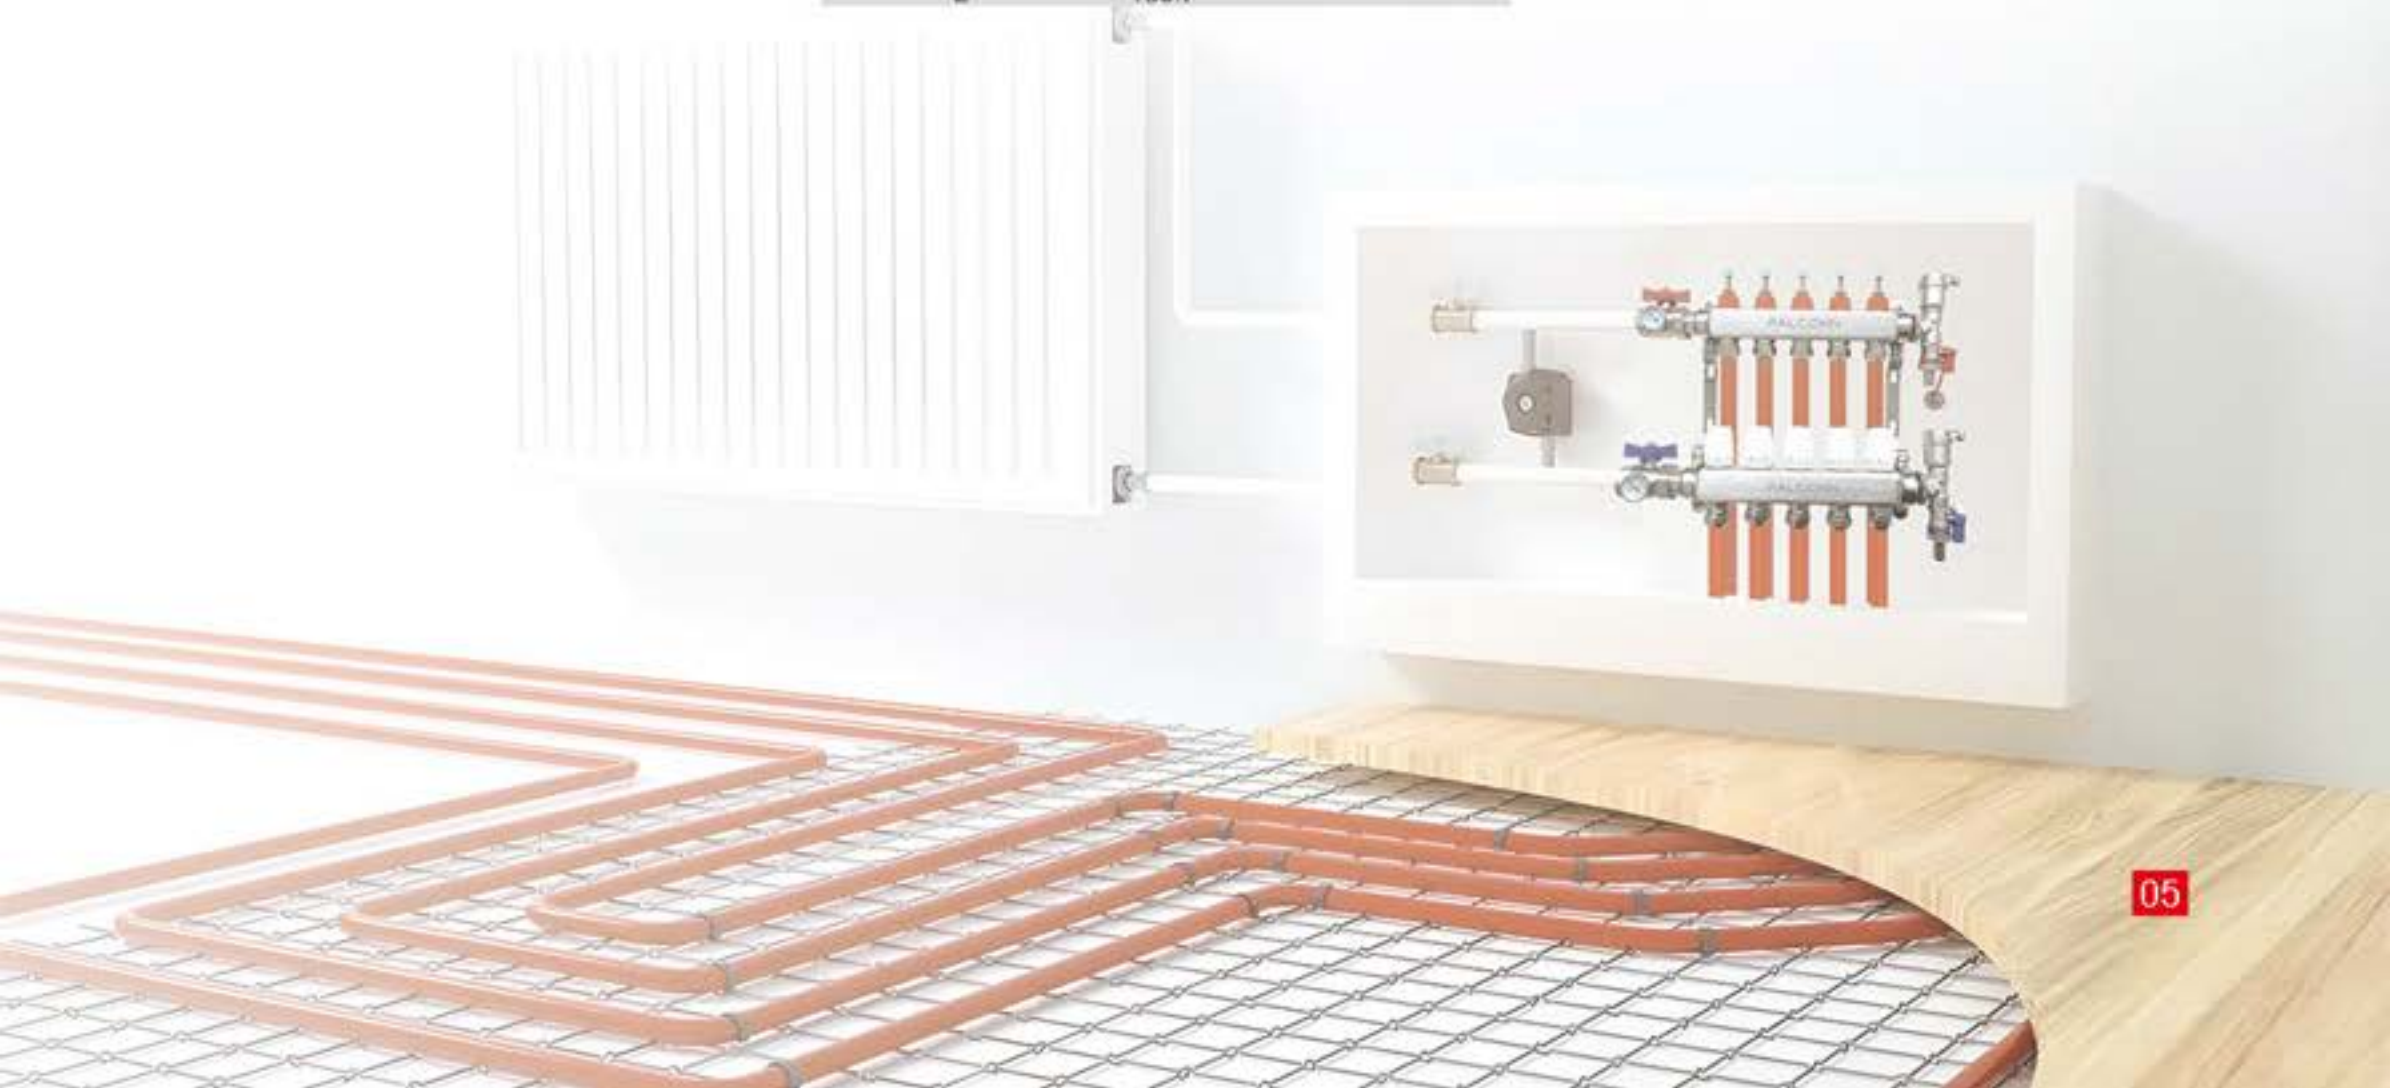

ASTM F1807 Pex Crimp Fittings



Coupling

Specification

3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"
------	------	------	------	----	--------	--------	----



Reducing Coupling

Specification

3/8**1/2	1/2**5/8	1/2**3/4	5/8**3/4	3/4**1"	1**1-1/4"	1-1/4**1-1/2"	1-1/2**2"
----------	----------	----------	----------	---------	-----------	---------------	-----------



Elbow

Specification

3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"
------	------	------	------	----	--------	--------	----



Tee

Specification

3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"
------	------	------	------	----	--------	--------	----



Reducing Tee

Specification

3/8**3/8**1/2	1/2**3/8**3/8"	1/2**3/8**1/2"	1/2**1/2**3/8"	1/2**1/2**5/8"	1/2**1/2**3/4"	5/8**1/2**1/2"	5/8**1/2**5/8"
5/8**5/8**1/2"	5/8**5/8**3/4"	3/4**1/2**1/2"	3/4**1/2**3/4"	3/4**5/8**5/8"	3/4**3/4**1/2"	3/4**3/4**1"	1**1/2**1"
1**3/4**1/2"	1**3/4**3/4"	1**1**1/2"	1**1**3/4"	1**1**1-1/4"	1-1/4**1**1"	1-1/4**1-1/4**1"	1-1/4**1-1/4**1-1/2"
1-1/2**1-1/4**1-1/2"	1-1/2**1-1/2**3/4"	1-1/2**1-1/2**1"	1-1/2**1-1/2**1-1/4"	2**1-1/4**1-1/4"	2**1-1/2**1-1/2"	2**2**1-1/4"	2**2**1-1/2"

ASTM F1807 Pex Crimp Fittings

Male NPT Adapters



Specification

3/8"PEX*3/8M	3/8"PEX*1/2M	1/2"PEX*1/2M	5/8"PEX*1/2M	5/8"PEX*3/4M	3/4"PEX*1/2M	3/4"PEX*3/4M	3/4"PEX*1M
1"PEX*3/4M	1"PEX*1M	1"PEX*1-1/4M	1-1/4"PEX*1M	1-1/4"PEX*1-1/4M	1-1/4"PEX*1-1/2M	1-1/2"PEX*1-1/2M	2"PEX*2M

Female NPT Adapters



Specification

3/8"PEX*3/8F	3/8"PEX*1/2F	1/2"PEX*1/2F	5/8"PEX*1/2F	5/8"PEX*3/4F	3/4"PEX*1/2F	3/4"PEX*3/4F	3/4"PEX*1F
1"PEX*3/4F	1"PEX*1F	1"PEX*1-1/4F	1-1/4"PEX*1F	1-1/4"PEX*1-1/4F	1-1/4"PEX*1-1/2F	1-1/2"PEX*1-1/2F	2"PEX*2F

PEX Female Sweat 90° Elbow



Specification

1/2"PEX*1/2F	1/2"PEX*3/4F	5/8"PEX*3/4F	3/4"PEX*1/2F	3/4"PEX*3/4F	1"PEX*3/4F	1"PEX*1F
--------------	--------------	--------------	--------------	--------------	------------	----------

PEX Male Sweat 90° Elbow



Specification

1/2"PEX*1/2M	1/2"PEX*3/4M	5/8"PEX*3/4M	3/4"PEX*1/2M	3/4"PEX*3/4M	1"PEX*3/4M	1"PEX*1M
--------------	--------------	--------------	--------------	--------------	------------	----------

PEX Male 90° Elbow



Specification

1/2"PEX*1/2M	1/2"PEX*3/4M	5/8"PEX*3/4M	3/4"PEX*1/2M	3/4"PEX*3/4M	1"PEX*3/4M	1"PEX*1M
--------------	--------------	--------------	--------------	--------------	------------	----------

PEX FPT Drop Ear 90° Elbow



Specification

3/8"PEX*3/8F	1/2"PEX*1/2F	1/2"PEX*3/4F	5/8"PEX*3/4F	3/4"PEX*1/2F	3/4"PEX*3/4F	1"PEX*1F
--------------	--------------	--------------	--------------	--------------	--------------	----------

ASTM F1807 Pex Crimp Fittings



PEX Male Sweat Adapters

Specification

3/8"PEX*3/8M	3/8"PEX*1/2M	1/2"PEX*1/2M	5/8"PEX*1/2M	5/8"PEX*3/4M	3/4"PEX*1/2M	3/4"PEX*3/4M	3/4"PEX*1M
1"PEX*3/4M	1"PEX*1M	1"PEX*1-1/4M	1-1/4"PEX*1M	1-1/4"PEX*1-1/4M	1-1/4"PEX*1-1/2M	1-1/2"PEX*1-1/2M	2"PEX*2M



PEX Female Sweat Adapters

Specification

3/8"PEX*3/8F	3/8"PEX*1/2F	1/2"PEX*1/2F	5/8"PEX*1/2F	5/8"PEX*3/4F	3/4"PEX*1/2F	3/4"PEX*3/4F	3/4"PEX*1F
1"PEX*3/4F	1"PEX*1F	1"PEX*1-1/4F	1-1/4"PEX*1F	1-1/4"PEX*1-1/4F	1-1/4"PEX*1-1/2F	1-1/2"PEX*1-1/2F	2"PEX*2F



PEX Plugs

Specification

3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"
------	------	------	------	----	--------	--------	----



PEX FPT Cross Tee

Specification

3/8"PEX*3/8"PEX*3/8"F	1/2"PEX*1/2"PEX*1/2"F	3/4"PEX*3/4"PEX*3/4"F	1"PEX*1"PEX*1"F
-----------------------	-----------------------	-----------------------	-----------------



PEX CRIMP RINGS

Specification

3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"
------	------	------	------	----	--------	--------	----



PEX Stainless Steel Pinch Clamps

Specification

3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"
------	------	------	------	----	--------	--------

ASTM F1807 PEX VALVE



Specification	1/4"FPT*FPT	3/8"FPT*FPT	1/2"FPT*FPT	3/4"FPT*FPT	1"FPT*FPT	1-1/4"FPT*FPT	1-1/2"FPT*FPT	2"FPT*FPT
Port Size	0.394	0.394	0.59	0.748	0.941	1.26	1.575	1.929



Specification	1/2"FPT*FPT	3/4"FPT*FPT	1"FPT*FPT
Port Size	0.59	0.748	0.941



Specification	1/4"FPT*MPT	3/8"FPT*MPT	1/2"FPT*MPT	3/4"FPT*MPT	1"FPT*MPT	1-1/4"FPT*MPT	1-1/2"FPT*MPT	2"FPT*MPT
Port Size	0.394	0.394	0.59	0.748	0.941	1.26	1.575	1.929



Specification	1/2"FPT*1/2MPT	3/4"FPT*3/4MPT	1"FPT*3/4MPT
Port Size	0.59	0.748	0.941



Specification	1/4"MPT*MPT	3/8"MPT*MPT	1/2"MPT*MPT	3/4"MPT*MPT	1"MPT*MPT	1-1/4"MPT*MPT	1-1/2"MPT*MPT	2"MPT*MPT
Port Size	0.394	0.394	0.59	0.748	0.941	1.26	1.575	1.929



Specification	1/2"MPT*1/2MPT	3/4"MPT*3/4MPT	1"MPT*1MPT
Port Size	0.59	0.748	0.941



Specification	1/2"Comp*Comp	3/4"Comp*Comp	1"Comp*Comp
Port Size	0.59	0.748	0.941

ASTM F1807 PEX VALVE



Specification	1/2"Comp*Comp	3/4"Comp*Comp	1"Comp*Comp
Port Size	0.59	0.748	0.941



Specification	1/2"Sweat*Sweat	3/4"Sweat*Sweat	1"Sweat*Sweat	1-1/4"Sweat*Sweat	1-1/2"Sweat*Sweat	2"Sweat*Sweat
Port Size	0.59	0.748	0.941	1.26	1.575	1.929



Specification	1/2"Sweat*Sweat	3/4"Sweat*Sweat	1"Sweat*Sweat
Port Size	0.59	0.748	0.941



Specification	1/2"FPT Sweat*1/2MPT	3/4"FPT Sweat*3/4MPT	1"FPT Sweat*3/4MPT	1-1/4"FPT Sweat*3/4MPT	1-1/2"FPT Sweat*3/4MPT	2"FPT Sweat*3/4MPT
Port Size	0.59	0.748	0.941	1.26	1.575	1.929



Specification	1/2"FPT Sweat*1/2FPT	3/4"FPT Sweat*3/4FPT	1"FPT Sweat*1FPT	1-1/4"FPT Sweat*1-1/4FPT	1-1/2"FPT Sweat*1-1/2FPT	2"FPT Sweat*2FPT
Port Size	0.59	0.748	0.941	1.26	1.575	1.929



Specification	1/2"FPT Sweat*1/2MPT	3/4"FPT Sweat*3/4MPT	1"FPT Sweat*1MPT
Port Size	0.59	0.748	0.941



Specification	1/2"FPT Sweat*1/2FPT	3/4"FPT Sweat*3/4FPT	1"FPT Sweat*1FPT
Port Size	0.59	0.748	0.941

ASTM F1807 PEX VALVE



Specification	1/2"PEX *PEX	3/4"PEX *PEX	1"PEX *PEX	1-1/4"PEX *PEX
Port Size	0.35	0.53	0.748	0.906



Specification	1/2"PEX *PEX	3/4"PEX *PEX	1"PEX *PEX	1-1/4"PEX *PEX
Port Size	0.35	0.53	0.748	0.906



Specification	1/2"PEX *Sweat	3/4"PEX *Sweat	1"PEX *Sweat	1-1/4"PEX *Sweat
Port Size	0.35	0.53	0.748	0.906



Specification	1/2"Sweat*PEX	3/4"Sweat*PEX	1"Sweat*PEX	1-1/4"Sweat*PEX
Port Size	0.35	0.53	0.748	0.906



Specification	1/2"PEX *FPT	3/4"PEX *FPT	1"PEX *FPT	1-1/4"PEX *FPT
Port Size	0.35	0.53	0.748	0.906



Specification	1/2"PEX *1/2FPT	3/4"PEX *3/4FPT	1"PEX *1FPT	1-1/4"PEX *1-1/4FPT
Port Size	0.354	0.531	0.713	0.874



Specification	1/2"PEX *MPT	3/4"PEX *MPT	1"PEX *MPT	1-1/4"PEX *MPT
Port Size	0.35	0.53	0.748	0.906



Specification	1/2"PEX *1/2"MPT	3/4"PEX *3/4"MPT	1"PEX *1"MPT	1-1/4"PEX *1-1/4"MPT
Port Size	0.354	0.531	0.713	0.874

Flanged Ball Valves



Specification	1/2"FPT*FLA	3/4"FPT*FLA	1"FPT*FLA	1-1/4"FPT*FLA	1-1/2"FPT*FLA	2"FPT*FLA
Port Size	0.59	0.748	0.941	1.26	1.575	1.929



Specification	1/2"FLG*1/2"FPT	3/4"FLG*3/4"FPT	1"FLG*1"FPT	1-1/4"FLG*1-1/4"FPT	1-1/2"FLG*1-1/2"FPT	2"FLG*2"FPT
Port Size	0.59	0.748	0.941	1.26	1.575	1.929



Specification	1/2"Sweat*FLA	3/4"Sweat*FLA	1"Sweat*FLA	1-1/4"Sweat*FLA	1-1/2"Sweat*1FLA	2"Sweat*FLA
Port Size	0.59	0.748	0.984	1.26	1.575	1.929



Specification	1/2"FLG*1/2"FPT Sweat	3/4"FLG*3/4"FPT Sweat	1"FLG*1"FPT Sweat	1-1/4"FLG*1-1/4"FPT Sweat	1-1/2"FLG*1-1/2"FPT Sweat	2"FLG*2"FPT Sweat
Port Size	0.59	0.748	0.941	1.26	1.575	1.929



Specification	1/2"FLG*1/2"FPT Sweat	3/4"FLG*3/4"FPT Sweat	1"FLG*1"FPT Sweat	1-1/4"FLG*1-1/4"FPT Sweat	1-1/2"FLG*1-1/2"FPT Sweat	2"FLG*2"FPT Sweat
Port Size	0.59	0.748	0.941	1.26	1.575	1.929

ASTM F2159 PEX PPSU Fittings



Plug

Specification

3/8" 1/2" 3/4" 1"



Coupling

Specification

3/8" 1/2" 3/4" 1"



Reduce Coupling

Specification

3/8"*1/2 1/2"*3/4 3/4"*1" 1/2"*1"



Elbow

Specification

3/8" 1/2" 3/4" 1"



Tee

Specification

3/8" 1/2" 3/4" 1"



Reducing Tee

Specification

3/8"*3/8"*1/2 1/2"*3/8"*3/8" 1/2"*3/8"*1/2" 1/2"*1/2"*3/8" 3/4"*1/2"*1/2"

3/4"*1/2"*3/4" 1"*3/4"*1/2" 1"*3/4"*3/4" 1"*1"*1/2" 1"*1"*3/4"

ASTM F2159 PEX PPSU Fittings



Male NPT Adapters

Specification

3/8"PEX*3/8M	3/8"PEX*1/2M	1/2"PEX*1/2M	1"PEX*3/4M	1"PEX*1M
--------------	--------------	--------------	------------	----------



Female Swivel Adapter

Specification

3/8"PEX*3/8F	3/8"PEX*1/2F	1/2"PEX*1/2F	1"PEX*3/4F	1"PEX*1F
--------------	--------------	--------------	------------	----------



Female Swivel Elbow

Specification

1/2 PEX*1/2 FPT	3/4 PEX*3/4 FPT	3/4 PEX*3/4 FPT	1 PEX*3/4 FPT
-----------------	-----------------	-----------------	---------------



Male Elbow

Specification

1/2 PEX*1/2 MPT	3/4 PEX*3/4 MPT	3/4 PEX*3/4 MPT	1 PEX*3/4 MPT
-----------------	-----------------	-----------------	---------------



PEX Ports Closed Manifolds

Specification

3/4"x3/4"x1/2"2PORTS CLOSED	3/4"x3/4"x1/2"3PORTS CLOSED
3/4"x3/4"x1/2"4PORTS CLOSED	3/4"x3/4"x1/2"6PORTS CLOSED



PEX Ports Open Manifolds

Specification

3/4"x3/4"x1/2"2PORTS OPEN	3/4"x3/4"x1/2"3PORTS OPEN
3/4"x3/4"x1/2"4PORTS OPEN	3/4"x3/4"x1/2"6PORTS OPEN

PEX Crimp Fittings Installation



Cut Palconn PEX Pipe

Step1



Step2

Choose the right size of fitting and jaw of the crimping tool.



Step3

Put the copper crimp ring over the pipe at the open end. Later, insert the fitting body into the pex pipe until the shoulder of the fitting reach the pex pipe.



Step4

Open the crimping tool and put the fitting into the jaw. Press the jaw until it closes completely. While pressing, make sure the crimping jaw is vertical to the pipe, the pressing contact must be free of impurity.



Step5

Use the GO/NO GO gauge to check whether the pressing is completed. If the crimp ring slides into the "GO" slot, but stops at the shoulder in the "GO" slot, then the pressing is acceptable.



Step6

ASTM F1960 standard Pex Expansion Fittings



Coupling

Specification

3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"
------	------	------	------	----	--------	--------	----



Reducing Coupling

Specification

3/8**1/2	1/2**5/8	1/2**3/4	5/8**3/4	3/4**1"	1**1-1/4"	1-1/4**1-1/2"	1-1/2**2"
----------	----------	----------	----------	---------	-----------	---------------	-----------



Elbow

Specification

3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"
------	------	------	------	----	--------	--------	----



Tee

Specification

3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"
------	------	------	------	----	--------	--------	----



Reducing Tee

Specification

3/8**3/8**1/2	1/2**3/8**3/8"	1/2**3/8**1/2"	1/2**1/2**3/8"	1/2**1/2**5/8"	1/2**1/2**3/4"	5/8**1/2**1/2"	5/8**1/2**5/8"
5/8**5/8**1/2"	5/8**5/8**3/4"	3/4**1/2**1/2"	3/4**1/2**3/4"	3/4**5/8**5/8"	3/4**3/4**1/2"	3/4**3/4**1"	1**1/2**1"
1**3/4**1/2"	1**3/4**3/4"	1**1**1/2"	1**1**3/4"	1**1**1-1/4"	1-1/4**1**1"	1-1/4**1-1/4**1"	1-1/4**1-1/4**1-1/2"
1-1/2**1-1/4**1-1/2"	1-1/2**1-1/2**3/4"	1-1/2**1-1/2**1"	1-1/2**1-1/2**1-1/4"	2**1-1/4**1-1/4"	2**1-1/2**1-1/2"	2**2**1-1/4"	2**2**1-1/2"



Male NPT Adapters

Specification

3/8"PEX*3/8M	3/8"PEX*1/2M	1/2"PEX*1/2M	5/8"PEX*3/4M	5/8"PEX*3/4M	3/4"PEX*1/2M	3/4"PEX*3/4M	3/4"PEX*1M
1"PEX*3/4M	1"PEX*1M	1"PEX*1-1/4M	1-1/4"PEX*1-1/4M	1-1/4"PEX*1-1/4M	1-1/4"PEX*1-1/2M	1-1/2"PEX*1-1/2M	2"PEX*2M

ASTM F1960 standard Pex Expansion Fittings



Female NPT Adapters

Specification

3/8"PEX*3/8F	3/8"PEX*1/2F	1/2"PEX*1/2F	5/8"PEX*1/2F	5/8"PEX*3/4F	3/4"PEX*1/2F	3/4"PEX*3/4F	3/4"PEX*1F
1"PEX*3/4F	1"PEX*1F	1"PEX*1-1/4F	1-1/4"PEX*1F	1-1/4"PEX*1-1/4F	1-1/4"PEX*1-1/2F	1-1/2"PEX*1-1/2F	2"PEX*2F



PEX Male Sweat 90° Elbow

Specification

1/2"PEX*1/2M	1/2"PEX*3/4M	5/8"PEX*3/4M	5/8"PEX*3/4M	3/4"PEX*1/2M	3/4"PEX*3/4M	1"PEX*3/4M	1"PEX*1M
--------------	--------------	--------------	--------------	--------------	--------------	------------	----------



PEX FPT Drop Ear 90° Elbow

Specification

3/8"PEX*3/8F	1/2"PEX*1/2F	1/2"PEX*3/4F	5/8"PEX*3/4F	5/8"PEX*3/4F	3/4"PEX*1/2F	3/4"PEX*3/4F	1"PEX*1F
--------------	--------------	--------------	--------------	--------------	--------------	--------------	----------



PEX Male Sweat Adapters

Specification

3/8"PEX*3/8M	3/8"PEX*1/2M	1/2"PEX*1/2M	5/8"PEX*1/2M	5/8"PEX*3/4M	3/4"PEX*1/2M	3/4"PEX*3/4M	3/4"PEX*1M
1"PEX*3/4M	1"PEX*1M	1"PEX*1-1/4M	1-1/4"PEX*1M	1-1/4"PEX*1-1/4M	1-1/4"PEX*1-1/2M	1-1/2"PEX*1-1/2M	2"PEX*2M



PEX Female Sweat Adapters

Specification

3/8"PEX*3/8F	3/8"PEX*1/2F	1/2"PEX*1/2F	5/8"PEX*1/2F	5/8"PEX*3/4F	3/4"PEX*1/2F	3/4"PEX*3/4F	3/4"PEX*1F
1"PEX*3/4F	1"PEX*1F	1"PEX*1-1/4F	1-1/4"PEX*1F	1-1/4"PEX*1-1/4F	1-1/4"PEX*1-1/2F	1-1/2"PEX*1-1/2F	2"PEX*2F



PEX Plugs

Specification

3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"
------	------	------	------	----	--------	--------	----

ASTM F1960 PEX PPSU Fittings



Plug

Specification

3/8" 1/2" 3/4" 1"



Coupling

Specification

3/8" 1/2" 3/4" 1"



Reduce Coupling

Specification

3/8"*1/2 1/2"*3/4 3/4"*1" 1/2"*1"



Elbow

Specification

3/8" 1/2" 3/4" 1"



Tee

Specification

3/8" 1/2" 3/4" 1"



Reducing Tee

Specification

3/8"*3/8"*1/2 1/2"*3/8"*3/8" 1/2"*3/8"*1/2" 1/2"*1/2"*3/8" 3/4"*1/2"*1/2"

3/4"*1/2"*3/4" 1"*3/4"*1/2" 1"*3/4"*3/4" 1"*1"*1/2" 1"*1"*3/4"

ASTM F1960 PEX PPSU Fittings



Male NPT Adapters

Specification

3/8"PEX*3/8M	3/8"PEX*1/2M	1/2"PEX*1/2M	1"PEX*3/4M	1"PEX*1M
--------------	--------------	--------------	------------	----------



Female Swivel Adapter

Specification

3/8"PEX*3/8F	3/8"PEX*1/2F	1/2"PEX*1/2F	1"PEX*3/4F	1"PEX*1F
--------------	--------------	--------------	------------	----------



Female Swivel Elbow

Specification

1/2 PEX*1/2 FPT	3/4 PEX*3/4 FPT	3/4 PEX*3/4 FPT	1 PEX*3/4 FPT
-----------------	-----------------	-----------------	---------------



Male Elbow

Specification

1/2 PEX*1/2 MPT	3/4 PEX*3/4 MPT	3/4 PEX*3/4 MPT	1 PEX*3/4 MPT
-----------------	-----------------	-----------------	---------------



PEX Ports Closed Manifolds

Specification

3/4"x3/4"x1/2"2PORTS CLOSED	3/4"x3/4"x1/2"3PORTS CLOSED
3/4"x3/4"x1/2"4PORTS CLOSED	3/4"x3/4"x1/2"6PORTS CLOSED



PEX Ports Open Manifolds

Specification

3/4"x3/4"x1/2"2PORTS OPEN	3/4"x3/4"x1/2"3PORTS OPEN
3/4"x3/4"x1/2"4PORTS OPEN	3/4"x3/4"x1/2"6PORTS OPEN



PEX Pex Expansion Ring

Specification
3/8"
1/2"
5/8"
3/4"
1"
1-1/4"
1-1/2"
2"



PEX Electric Expanding Tool

Specification
1/2"
3/4"
1"



Pex Push-fit Fittings



Reducing Coupling

Specification					
3/8**1/2	1/2**5/8	1/2**3/4	5/8**3/4	3/4**1"	1**1-1/4"



Elbow

Specification					
3/8"	1/2"	5/8"	3/4"	1"	1-1/4"



Tee

Specification					
3/8"	1/2"	5/8"	3/4"	1"	1-1/4"



Reducing Tee

Specification					
3/8**3/8**1/2"	1/2**3/8**3/8"	1/2**3/8**1/2"	1/2**1/2**3/8"	1/2**1/2**5/8"	1/2**1/2**3/4"
5/8**5/8**1/2"	5/8**5/8**3/4"	3/4**1/2**1/2"	3/4**1/2**3/4"	3/4**5/8**5/8"	3/4**3/4**1/2"
1**3/4**1/2"	1**3/4**3/4"	1**1**1/2"	1**1**3/4"	1**1**1-1/4"	1-1/4**1**1"

Pex Push-fit Fittings



Coupling

Specification					
3/8"	1/2"	5/8"	3/4"	1"	1-1/4"



Female NPT Tee

Specification					
3/8"x3/8"1/2"F	3/8"x3/8"3/4"F	1/2"x1/2"1/2"F	1/2"x1/2"3/4"F	5/8"x5/8"1/2"F	5/8"x5/8"3/4"F
3/4"x3/4"x1/2"F	3/4"x3/4"x3/4"F	3/4"x3/4"x1"F	1"x1"x3/4"F	1"x1"x1"F	1-1/4"x1-1/4"x1"F



Male NPT Adapters

Specification					
3/8"PEX*3/8M	3/8"PEX*1/2M	1/2"PEX*1/2M	5/8"PEX*1/2M	5/8"PEX*3/4M	3/4"PEX*1/2M
3/4"PEX*3/4M	1"PEX*3/4M	1"PEX*1M	1"PEX*1-1/4M	1-1/4"PEX*1M	1-1/4"PEX*1-1/4M



Female NPT Adapters

Specification					
3/8"PEX*3/8F	3/8"PEX*1/2F	1/2"PEX*1/2F	5/8"PEX*1/2F	5/8"PEX*3/4F	3/4"PEX*1/2F
3/4"PEX*3/4F	1"PEX*3/4F	1"PEX*1F	1"PEX*1-1/4F	1-1/4"PEX*1F	1-1/4"PEX*1-1/4F



PEX Male 90° Elbow

Specification					
3/8"PEX*3/8M	3/8"PEX*1/2M	1/2"PEX*1/2M	5/8"PEX*1/2M	5/8"PEX*3/4M	3/4"PEX*1/2M
3/4"PEX*3/4M	1"PEX*3/4M	1"PEX*1M	1"PEX*1-1/4M	1-1/4"PEX*1M	1-1/4"PEX*1-1/4M

Pex Push-fit Fittings



PEX Female 90° Elbow

Specification

3/8"PEX*3/8F	3/8"PEX*1/2F	1/2"PEX*1/2F	5/8"PEX*1/2F	5/8"PEX*3/4F	3/4"PEX*1/2F
3/4"PEX*3/4F	1"PEX*3/4F	1"PEX*1F	1"PEX*1-1/4F	1-1/4"PEX*1F	1-1/4"PEX*1-1/4F



PEX End Stop

Specification

3/8"	1/2"	5/8"	3/4"	1"	1-1/4"
------	------	------	------	----	--------



PEX FPT Drop Ear 90° Elbow

Specification

1/2"PEX*1/2F	3/4"PEX*1/2F	3/4"PEX*3/4F	1"PEX*3/4F	1"PEX*1F	1-1/4"PEX*1F
--------------	--------------	--------------	------------	----------	--------------



PEX Removal Disconnect Clip

Specification

3/8"	1/2"	5/8"	3/4"	1"	1-1/4"
------	------	------	------	----	--------




PEX Inserts

Specification

3/8"	1/2"	5/8"	3/4"	1"	1-1/4"
------	------	------	------	----	--------


PALCONN

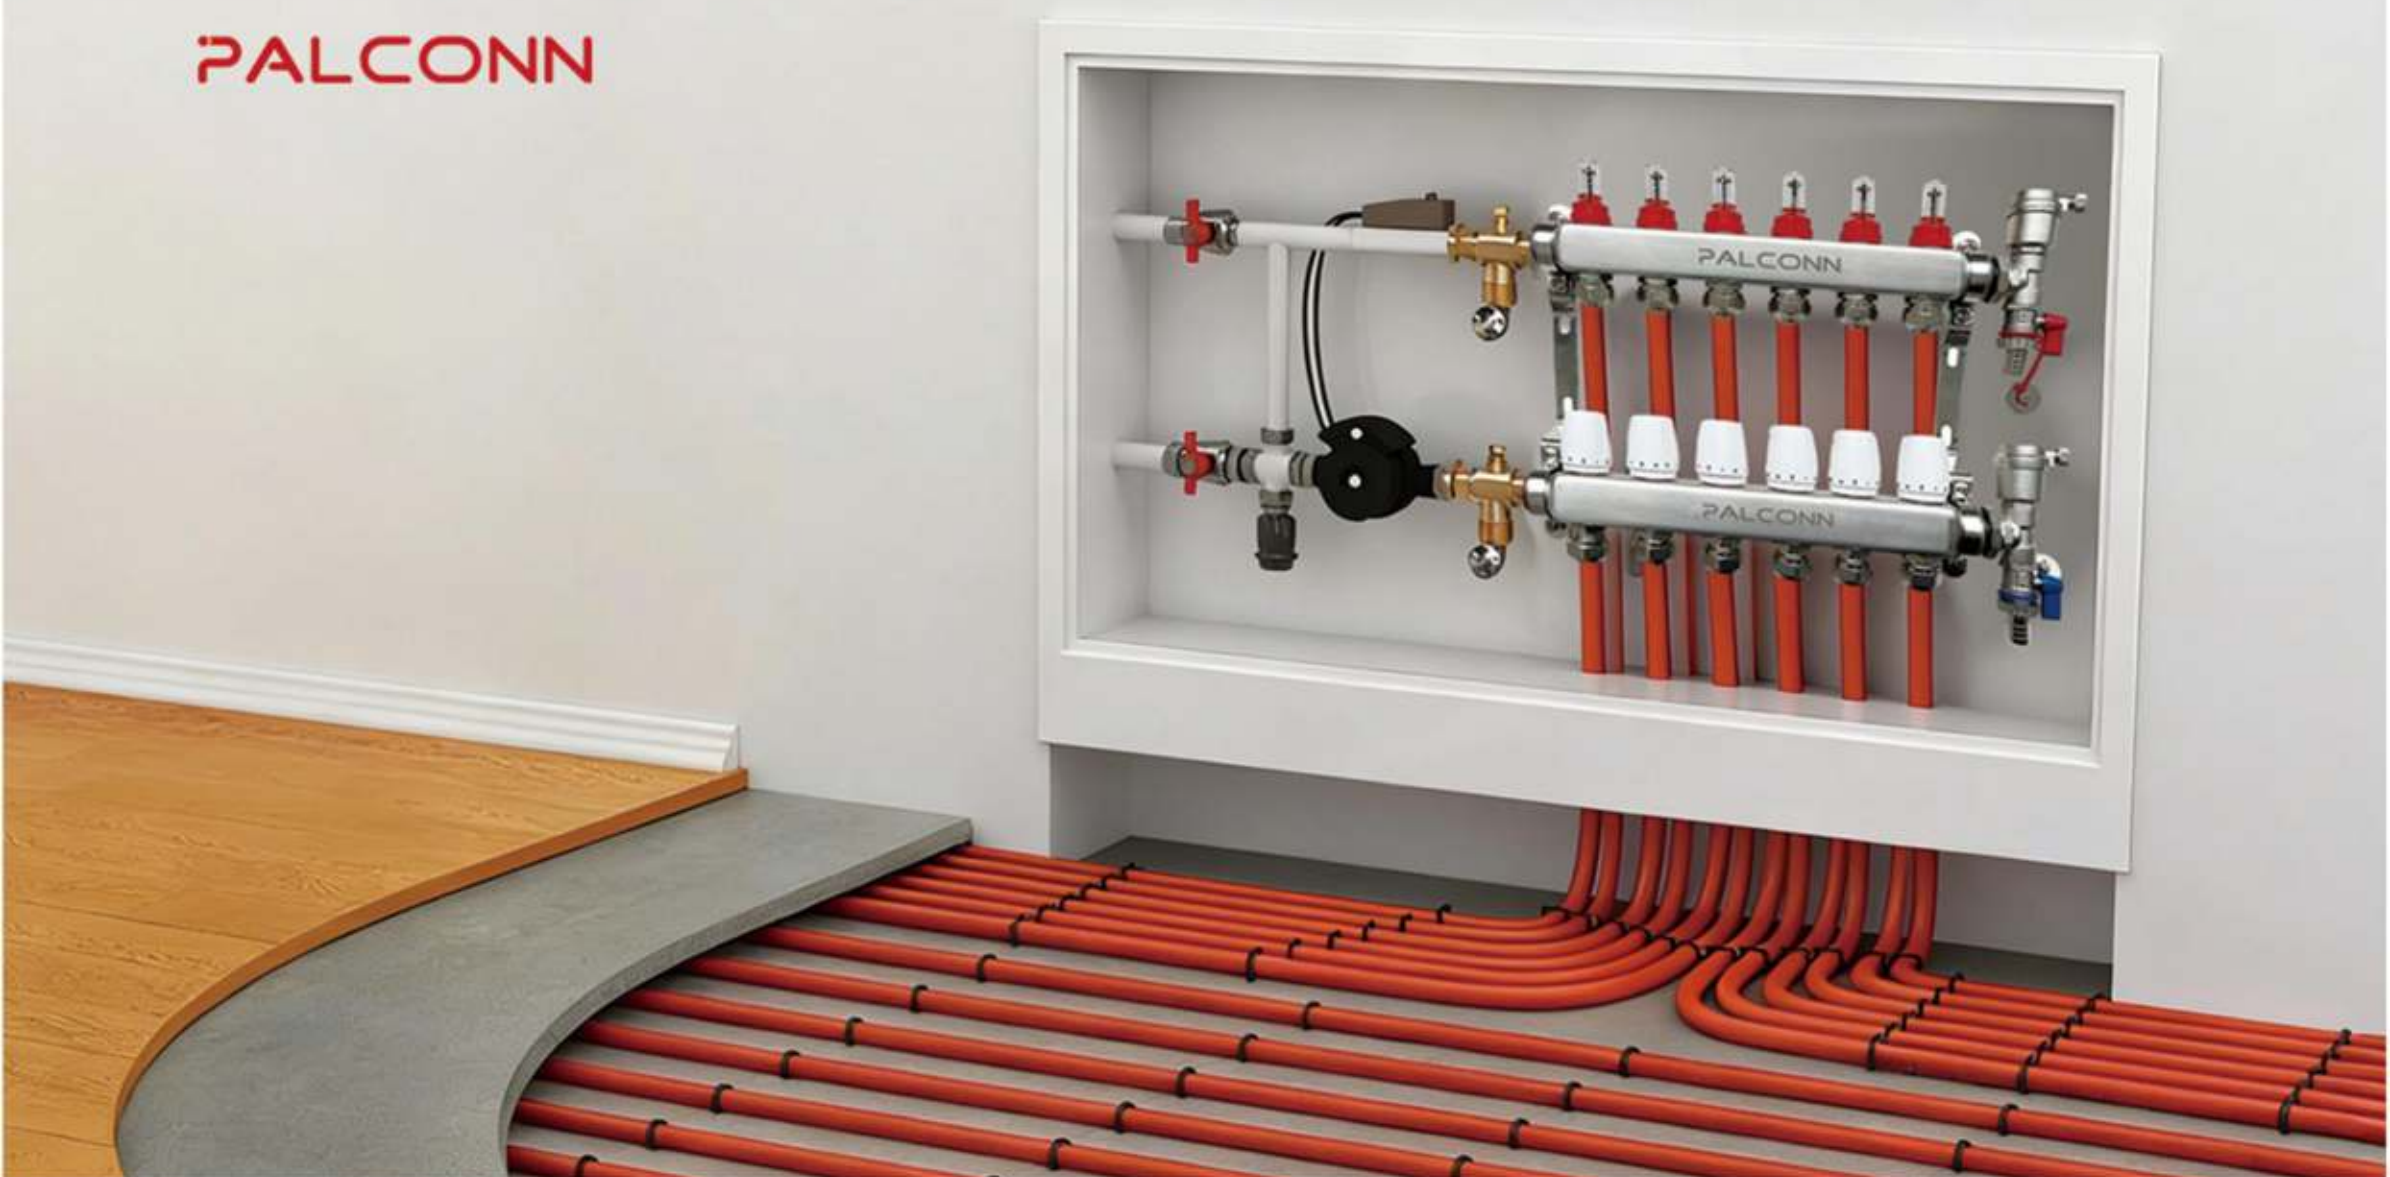

ASTM F1281 PEX/AL/PEX Tubing



Specification	Length
3/8"	100ft/250ft/300ft/500ft/1000ft
1/2"	100ft/250ft/300ft/500ft/1000ft
5/8"	100ft/250ft/300ft/500ft/1000ft
3/4"	100ft/250ft/300ft/500ft/1000ft
1"	100ft/250ft/300ft/500ft/1000ft
1-1/4"	100ft/250ft/300ft/500ft
1-1/2"	100ft/250ft/300ft/500ft

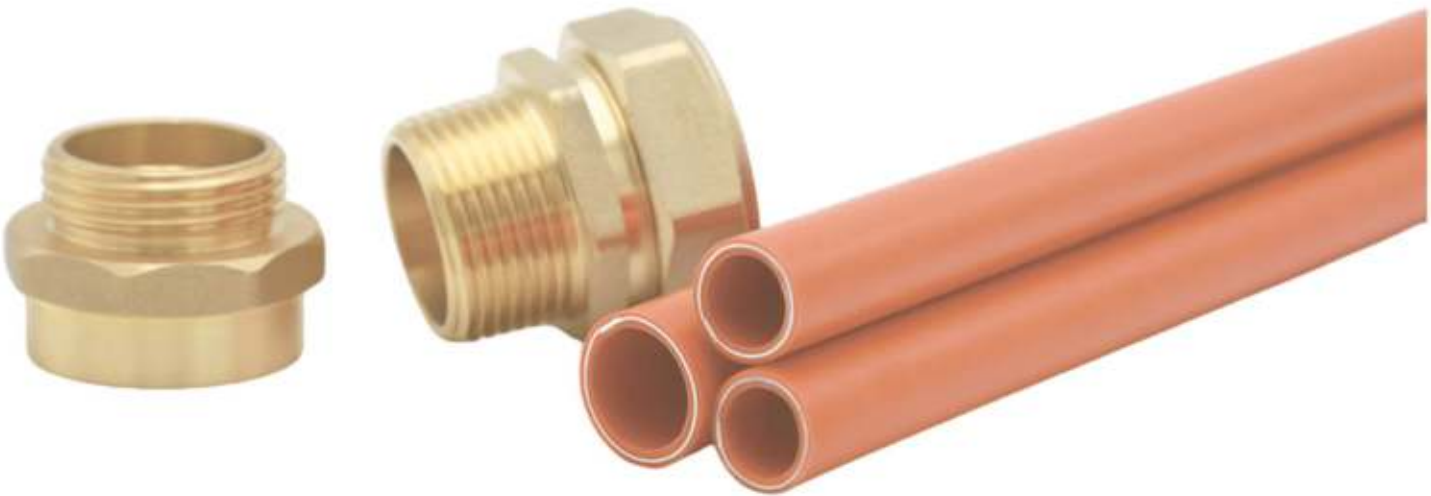

PEX-AL-PEX Compression Fittings



Male NPT Adapters

Specification

3/8"x3/8"M 1/2"x1/2"M 1/2"x3/4"M 5/8"x1/2"M 5/8"x3/4"M 3/4"x3/4"M 3/4"x1"M 1"x3/4"M 1"x1"M 1-1/4" x 1"M 1-1/4" x 1-1/4"M



Female NPT Adapters

Specification

3/8"x3/8"F 1/2"x1/2"F 1/2"x3/4"F 5/8"x1/2"F 5/8"x3/4"F 3/4"x3/4"F 3/4"x1"F 1"x3/4"F 1"x1"F 1-1/4" x 1"F 1-1/4" x 1-1/4"F



Couplings

Specification

3/8" 1/2" 5/8" 3/4" 1" 1-1/4"



Elbow

Specification

3/8" 1/2" 5/8" 3/4" 1" 1-1/4"



Tees

Specification

3/8" 1/2" 5/8" 3/4" 1" 1-1/4"



Male NPT Elbow

Specification

3/8"x3/8"M 1/2"x1/2"M 1/2"x3/4"M 5/8"x1/2"M 5/8"x3/4"M 3/4"x3/4"M 3/4"x1"M 1"x3/4"M 1"x1"M 1-1/4" x 1"M 1-1/4" x 1-1/4"M



Female NPT Elbow

Specification

3/8"x3/8"F 1/2"x1/2"F 1/2"x3/4"F 5/8"x1/2"F 5/8"x3/4"F 3/4"x3/4"F 3/4"x1"F 1"x3/4"F 1"x1"F 1-1/4" x 1"F 1-1/4" x 1-1/4"F



Reducing Tees

Specification

3/8"x3/8"x1/2" 1/2"x5/8"x1/2" 5/8"x1/2"x1/2" 5/8"x1/2"x5/8" 5/8"x5/8"x1/2" 3/4"x1/2"x3/4" 3/4"x5/8"x3/4" 3/4"x3/4"x1" 1"x1"x1/2" 1"x1"x5/8" 1"x1"x3/4" 1"x1"x1-1/4"



Male NPT Tees

Specification

1/2"x1/2"x1/2"M 1/2"x1/2"x3/4"M 5/8"x5/8"x1/2"M 5/8"x5/8"x3/4"M 3/4"x3/4"x3/4"M 3/4"x3/4"x1"M 1"x1"x3/4"M 1"x1"x1"M 1-1/4"x1-1/4"x1"M



Female NPT Tees

Specification

1/2"x1/2"x1/2"F 1/2"x1/2"x3/4"F 5/8"x5/8"x1/2"F 5/8"x5/8"x3/4"F 3/4"x3/4"x3/4"F 3/4"x3/4"x1"F 1"x1"x3/4"F 1"x1"x1"F 1-1/4"x1-1/4"x1"F




Wallplate Elbow Female


Specification

3/8"x3/8"F 1/2"x1/2"F 1/2"x3/4"F 5/8"x1/2"F 5/8"x3/4"F 3/4"x3/4"F 3/4"x1"F 1"x3/4"F 1"x1"F

PEX/AL/PEX Tubing Installation

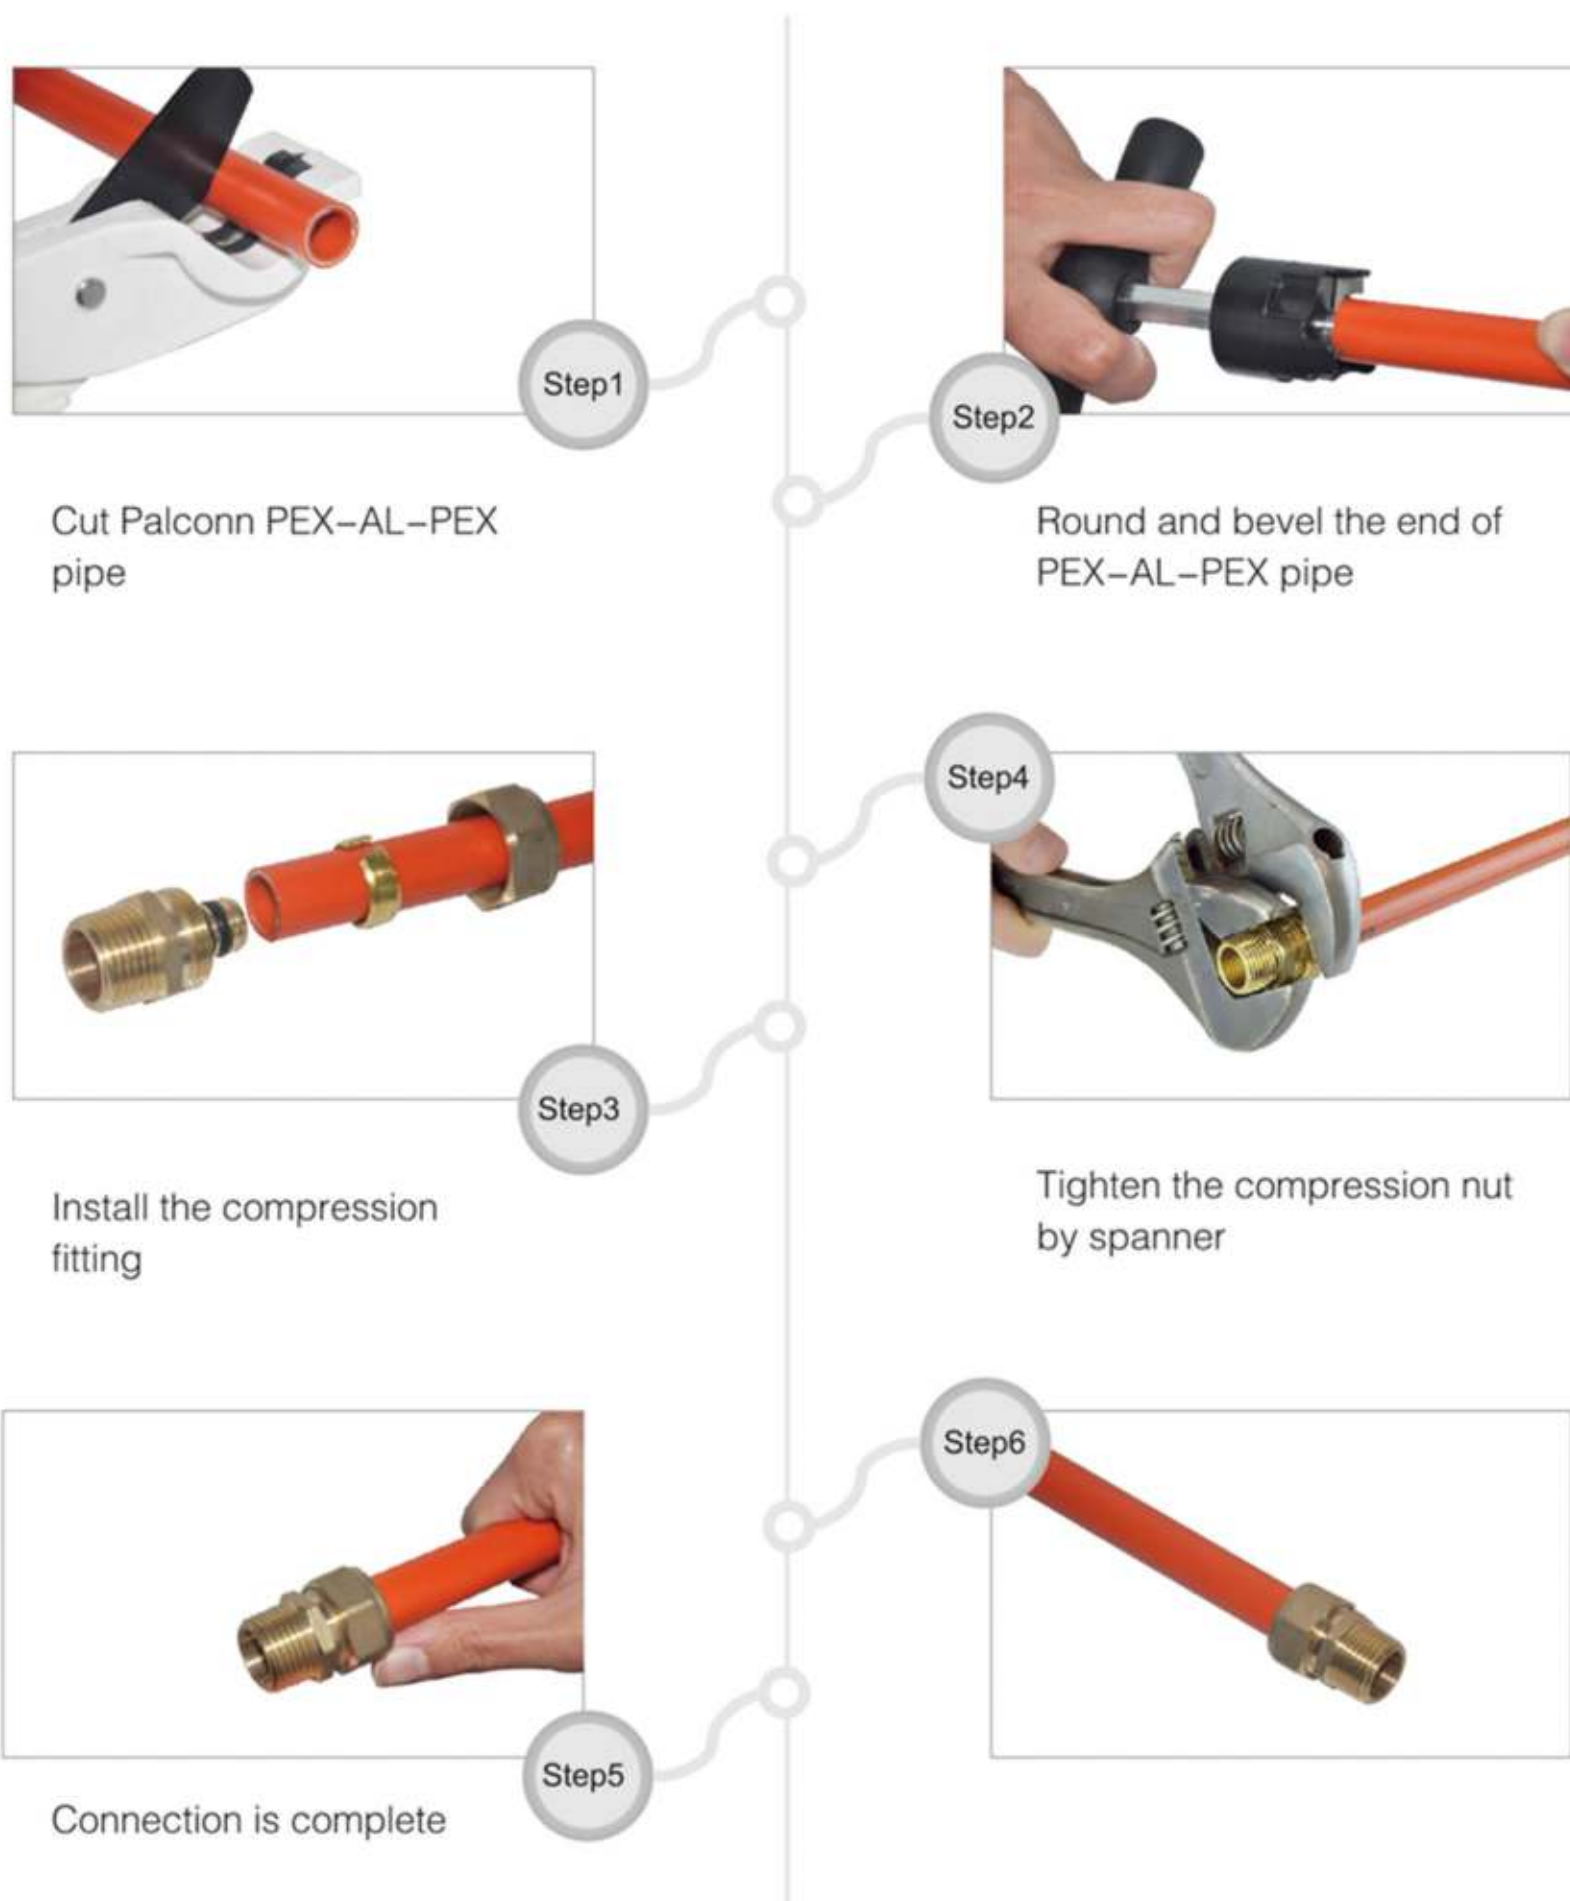

PALCONN

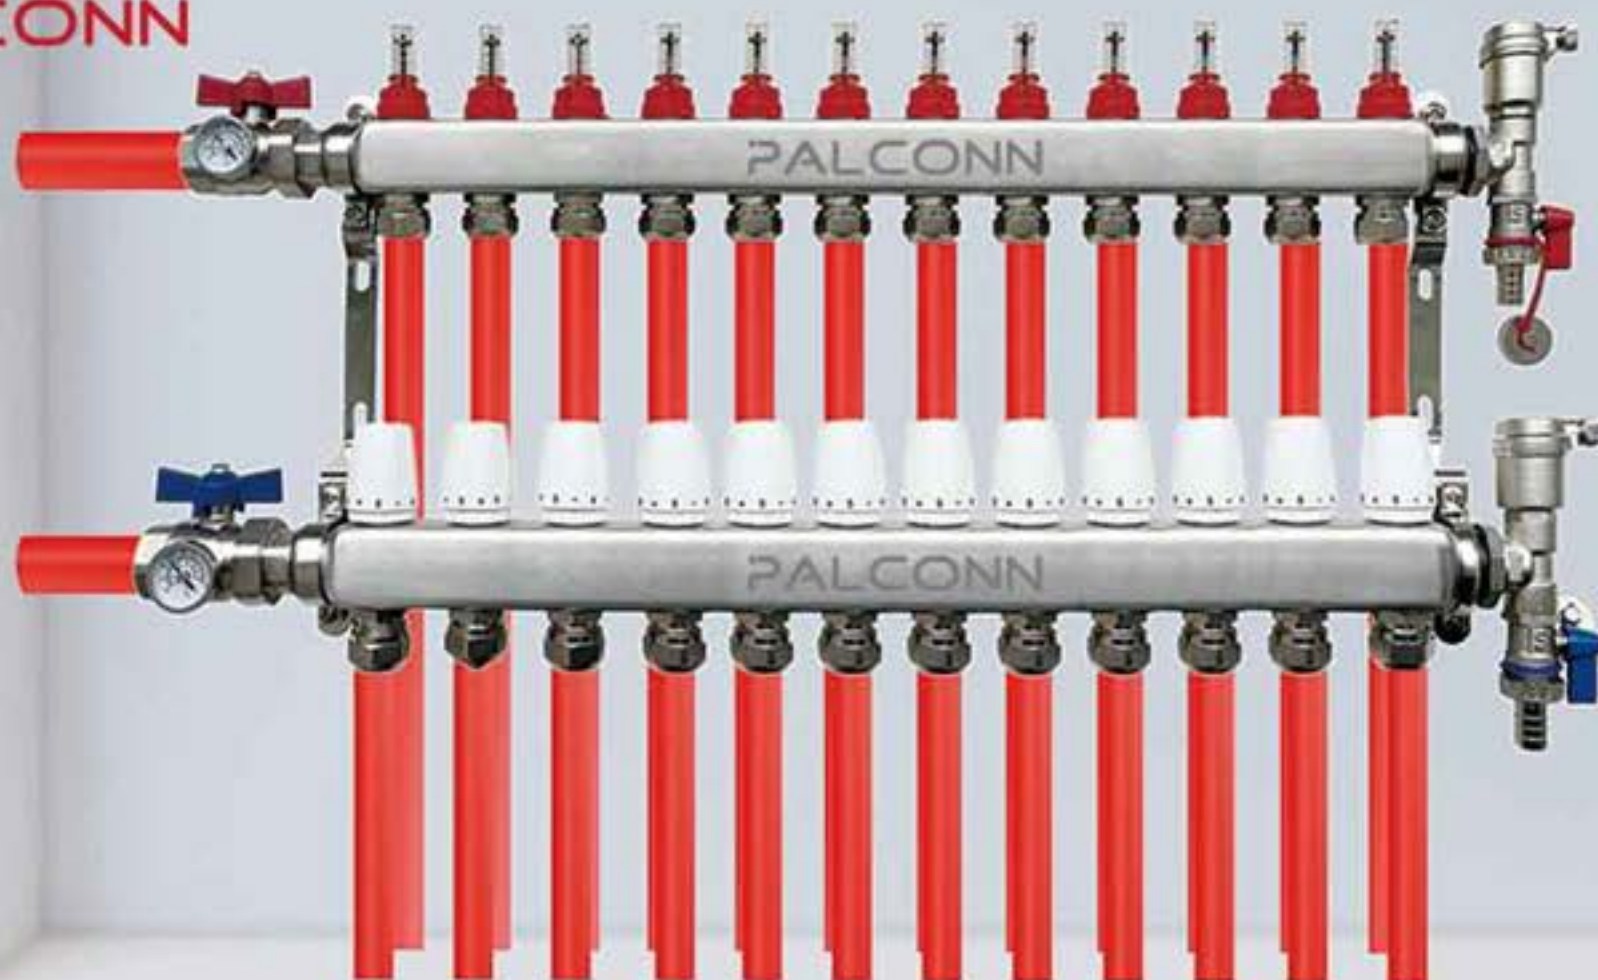

Stainless Steel Radiant Heat Manifold Assembly w/ Flow Meter

Specification			Loops
1"Caliber	1-1/4"Caliber		1
1"Caliber	1-1/4"Caliber		2
1"Caliber	1-1/4"Caliber		3
1"Caliber	1-1/4"Caliber		4
1"Caliber	1-1/4"Caliber		5
1"Caliber	1-1/4"Caliber		6
1"Caliber	1-1/4"Caliber		7
1"Caliber	1-1/4"Caliber		8
1"Caliber	1-1/4"Caliber		9
1"Caliber	1-1/4"Caliber		10
1"Caliber	1-1/4"Caliber		11
1"Caliber	1-1/4"Caliber		12




PAL-MFB

- 1.Brass intelligent manifold,material:brass nickel coated
- 2.From 2 way –6 way

Material: Brass

Size
3/4" F-1/2FX2
3/4" F-1/2FX3
3/4" F-1/2FX4
3/4" F-1/2FX5
3/4" F-1/2FX6
1" F-1/2FX2
1" F-1/2FX3
1" F-1/2FX4
1" F-1/2FX5
1" F-1/2FX6

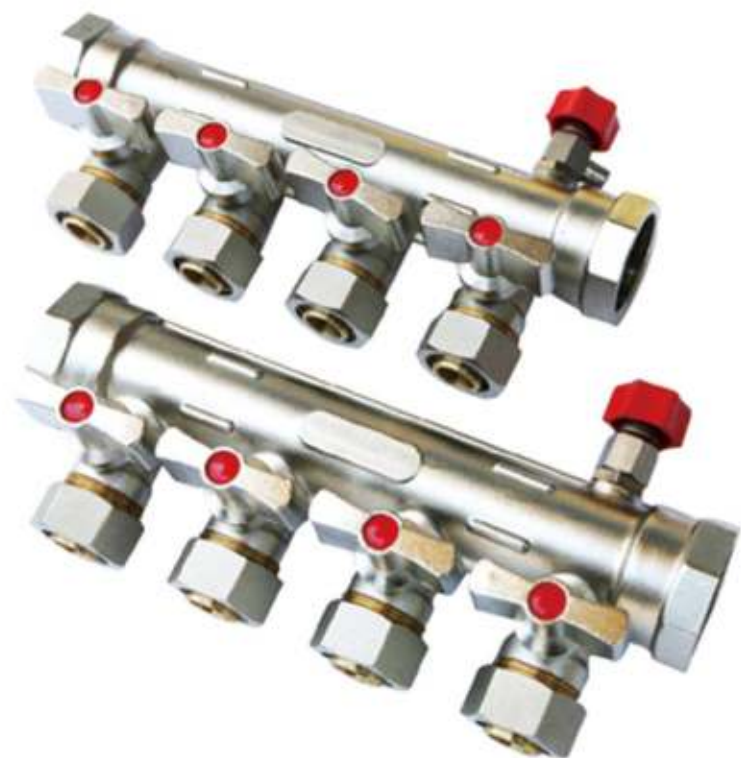

Washing Machine Outlet Boxes



Specification

Center Washing Machine Box 1/2 F1807 PEX Lead Free



Specification

Center Washing Machine Box 1/2 F1807 PEX w/WHA Lead Free

Ice Maker Outlet Boxes



Specification

Universal Ice Maker Box 1/2 F1807 PEX Lead Free



Specification

Universal Ice Maker Box 1/2 F1807 PEX w/WHA Lead Free

Tools & Accessories



PEX CRIMP RINGS

Specification							
3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"



PEX Stainless Steel Pinch Clamps

Specification							
3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"



PEX Stainless Steel Screw Clamps

Specification							
3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"



PEX Bends

Specification					
3/8"	1/2"	5/8"	3/4"	1"	



PEX Talon

Specification					
3/8"	1/2"	5/8"	3/4"	1"	



Multi-head PEX Crimp Tool Set

Specification							
3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"



PEX Expand Tool Set

Specification			
1/2"	3/4"	1"	



2 Inch PEX Tool Kit

Specification		
1-1/4"	1-1/2"	2"

Pipe cutter



Pipe reamer



PALCONN



ASTM D1785 Standard SCH40 UPVC Pipe

Size	Outside Diameter	Wall Thickness	Tolerance Of Wall Thickness
Inch	mm	mm	mm
1/2"	21.34	2.77	(+)0.51
3/4"	26.67	2.87	(+)0.51
1"	33.4	3.38	(+)0.51
1-1/4"	42.16	3.56	(+)0.51
1-1/2"	48.26	3.68	(+)0.51
2"	60.32	3.91	(+)0.51
2-1/2"	73.02	5.16	(+)0.61
3"	88.9	5.49	(+)0.66
4"	114.3	6.02	(+)0.71
5"	141.3	6.55	(+)0.79
6"	168.28	7.11	(+)0.86
8"	219.08	8.18	(+)0.99
10"	273.05	9.27	(+)1.12
12"	323.85	10.31	(+)1.24
14"	356.6	11.1	(+)1.35
16"	406.4	12.7	(+)1.52

PVC Pipe Fittings



90° Elbow

Specification

1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
------	------	----	--------	--------	----	--------	----	----



45° Elbow

Specification

1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
------	------	----	--------	--------	----	--------	----	----



Female Adaptor

Specification

1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
------	------	----	--------	--------	----	--------	----	----



Male Adaptor

Specification

1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
------	------	----	--------	--------	----	--------	----	----



Coupling

Specification

1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
------	------	----	--------	--------	----	--------	----	----

PVC Pipe Fittings



Reducer

Specification									
1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	



Tee

Specification									
1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	



Cross

Specification									
1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	



Cap

Specification									
1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	



Union

Specification									
1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	



ASTM D1785 Standard SCH80 UPVC Pipe

Size	Outside Diameter	Wall Thickness	Tolerance Of Wall Thickness
Inch	mm	mm	mm
1/2"	21.34	3.73	(+)0.51
3/4"	26.67	3.91	(+)0.51
1"	33.4	4.55	(+)0.53
1-1/4"	42.16	4.85	(+)0.58
1-1/2"	48.26	5.08	(+)0.61
2"	60.32	5.54	(+)0.66
2-1/2"	73.02	7.01	(+)0.84
3"	88.9	7.62	(+)0.91
4"	114.3	8.56	(+)1.02
5"	141.3	9.52	(+)1.14
6"	168.28	10.97	(+)1.32
8"	219.08	12.7	(+)1.52
10"	273.05	15.06	(+)1.8
12"	323.85	17.45	(+)2.08
14"	356.6	19.05	(+)2.29
16"	406.4	21.41	(+)2.57

PVC Pipe Fittings



90° Elbow

Specification

1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	5"	6"	8"
------	------	----	--------	--------	----	--------	----	----	----	----	----



45° Elbow

Specification

1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	5"	6"	8"
------	------	----	--------	--------	----	--------	----	----	----	----	----



Female Adaptor

Specification

1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
------	------	----	--------	--------	----	--------	----	----



Male Adaptor

Specification

1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
------	------	----	--------	--------	----	--------	----	----



Coupling

Specification

1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	5"	6"	8"
------	------	----	--------	--------	----	--------	----	----	----	----	----

PVC Pipe Fittings

Reducer



Specification

3/4" 1/2" 1" 3/4" 1-1/4" 1" 1-1/2" 1-1/4" 2" 1-1/4" 2" 1-1/2" 2-1/2" 1-1/2" 3" 2" 4" 3" 5" 2" 6" 4"

Reducing Tee



Specification

3/4" 1/2" 1" 3/4" 1-1/4" 1" 1-1/2" 1-1/4" 2" 1-1/4" 2" 1-1/2" 2-1/2" 1-1/2" 3" 2" 4" 3" 5" 2" 6" 4"

Tee



Specification

1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3" 4" 5" 6" 8"

Cross



Specification

1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3" 4" 5" 6" 8"

PVC Pipe Fittings

Cap



Specification

1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3" 4" 5" 6" 8"

Union



Specification

1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3" 4"

Vanstone Flange



Specification

1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3" 4" 5" 6" 8"

Flange-1



Specification

1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2" 3" 4" 5" 6" 8"



ASTM D2665 PVC DWV



Male Plug

Specification

1-1/2" 2" 3" 4"



Male NPT Adapters

Specification

1-1/2" 2" 3" 4"



Female Adapter

Specification

1-1/2" 2" 3" 4"



Female Adapter with Cleanout-Plug

Specification

1-1/2" 2" 3" 4"

ASTM D2665 PVC DWV



Reducing Bushing

Specification				
3*1-1/2"	3*2"	4*2"	4*3"	



Coupling

Specification				
1-1/2"	2"	3"	4"	



45° Elbow

Specification				
1-1/2"	2"	3"	4"	



90° Elbow

Specification				
1-1/2"	2"	3"	4"	



Bend

Specification				
1-1/2"	2"	3"	4"	

ASTM D2665 PVC DWV



90 Elbow with low heel inlm

Specification			
3*1-1/2"	3*2"	4*2"	



Tee

Specification			
1-1/2"	2"	3"	4"



Reducing Tee

Specification			
3*1-1/2"	3*2"	4*2"	4*3"



Y Tee

Specification			
1-1/2"	2"	3"	4"



Test Tee with Cleanout Plug

Specification			
1-1/2"*1-1/2F	2*2F	3*3"F	4*4"F

ASTM D2665 PVC DWV



Female Tee

Specification				
1-1/2"*	1-1/2"F	2*2F	3*3"F	4*4"F



Two Way Cleanout Tee

Specification			
2"	3"	4"	



Double WYE

Specification			
2"	3"	4"	



DWV Tripple

Specification			
2"	3"	4"	



P-Trap

Specification			
1-1/2"	2"	3"	

WEIFANG PALCONN PLASTICS TECHNOLOGY CO.,LTD

ADD:YINMA INDUSTRIAL ZONE,WEIFANG,SHANDONG,CHINA

ZIP CODE:261317

Tel/Fax:0086-536-8798363

Email: info@palconn.cn

WEB:<http://www.palconn.com>