




FPGA

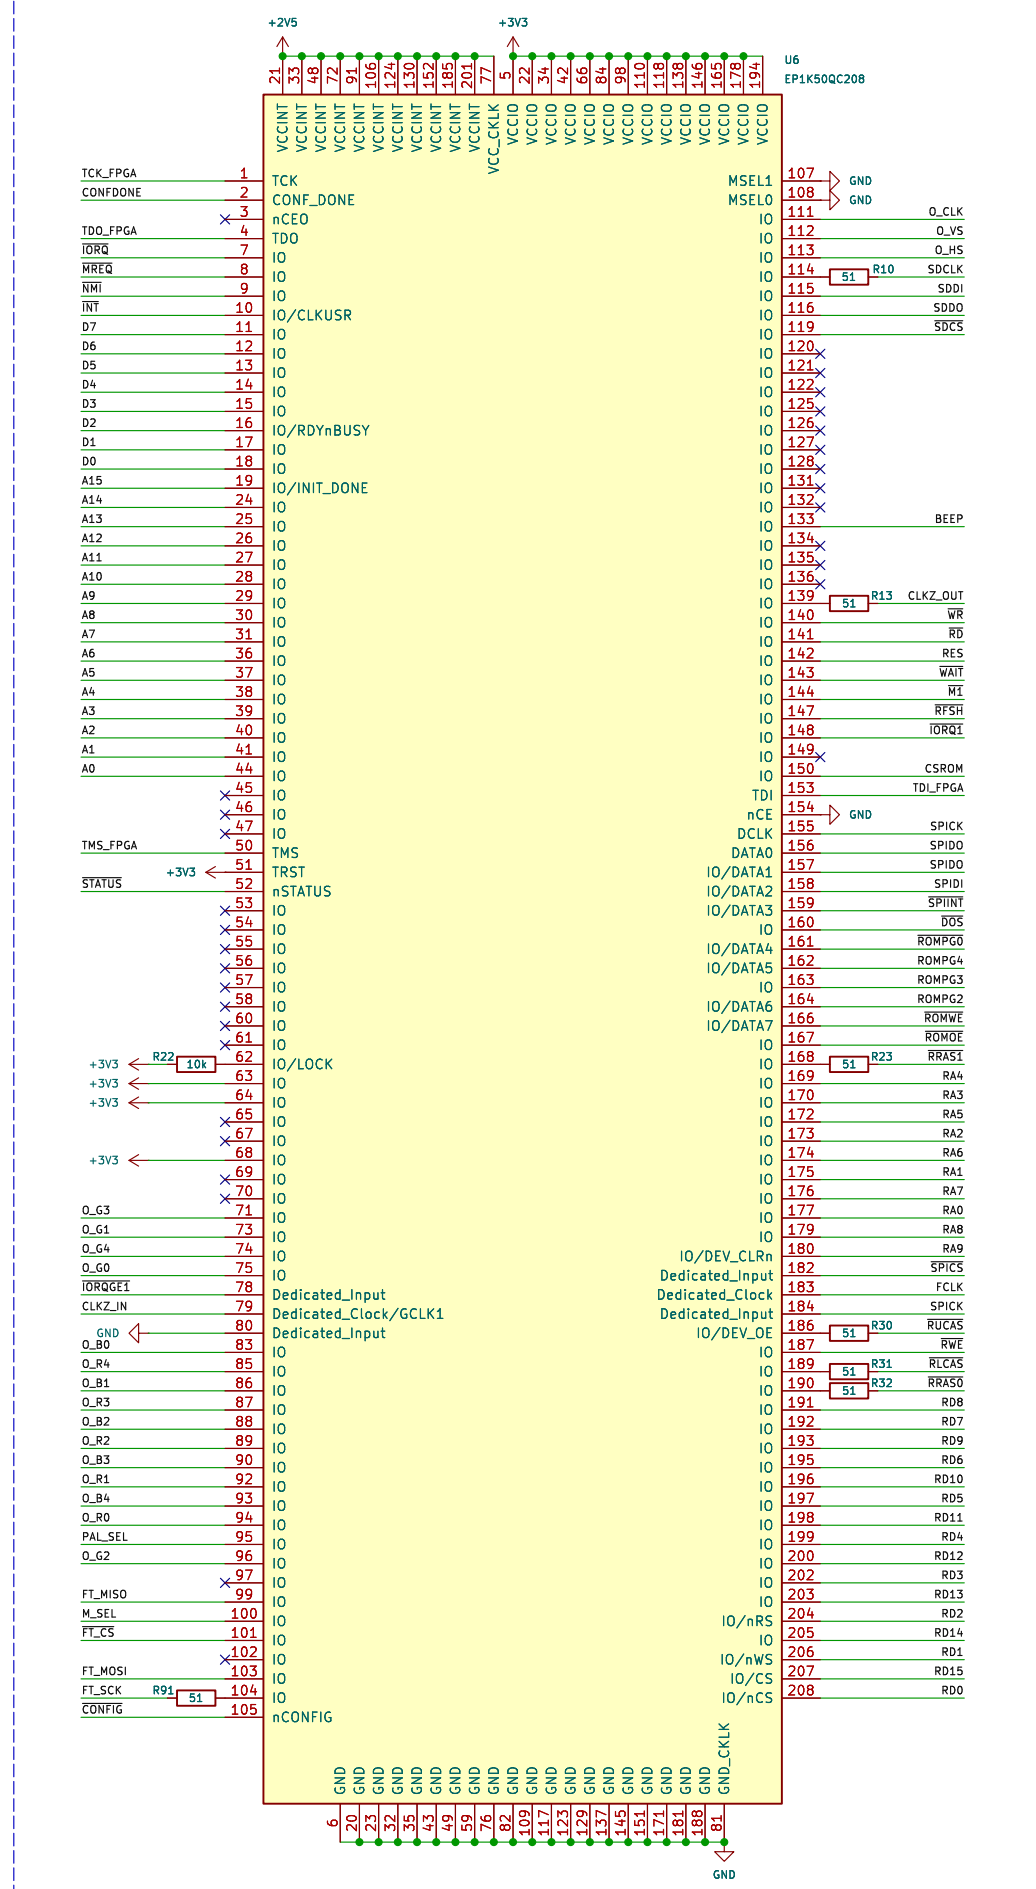


RAM 4Mb

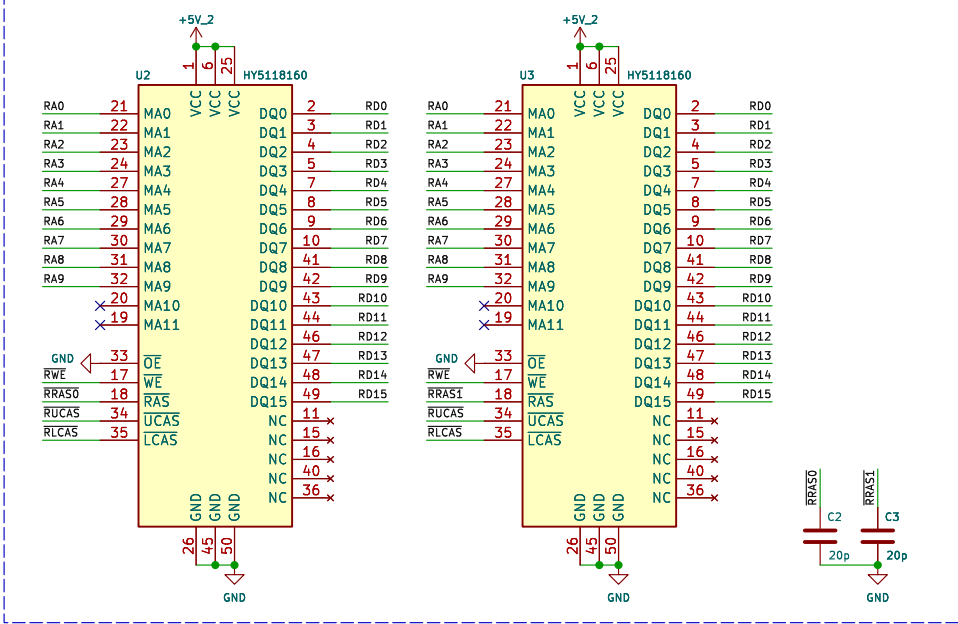


Clock

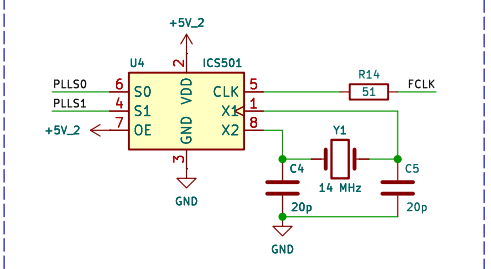


ROM 512Kb

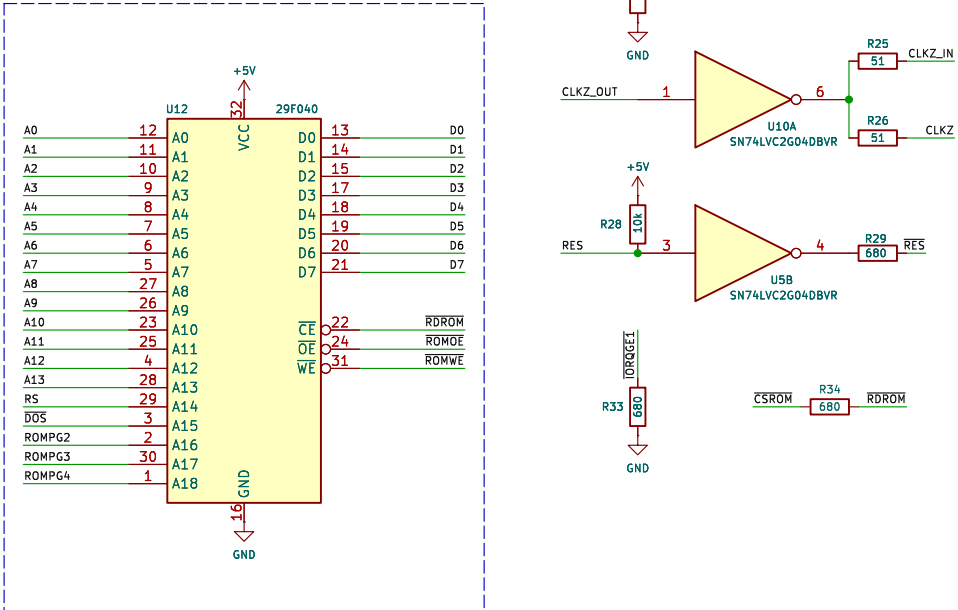


Keyboard & Mouse

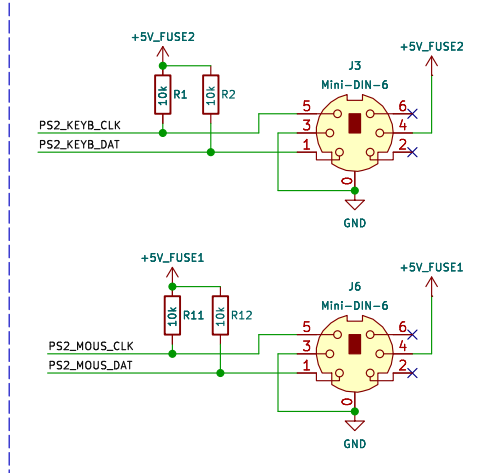


Joystick

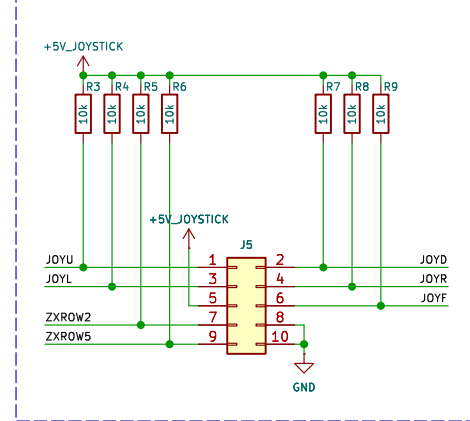


Power in / USB

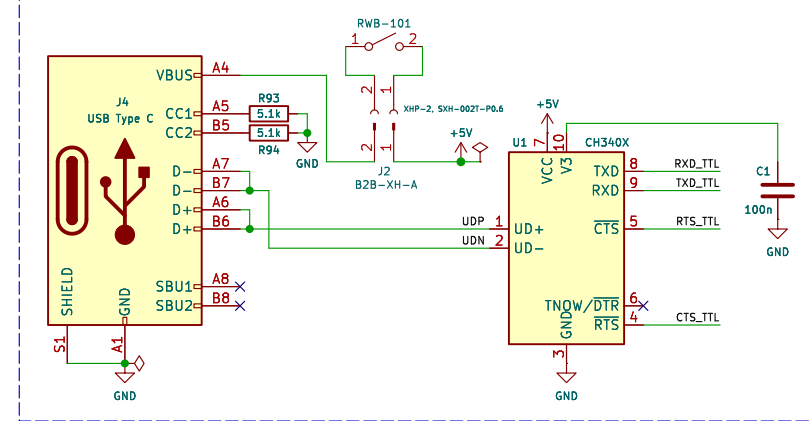


VDAC2

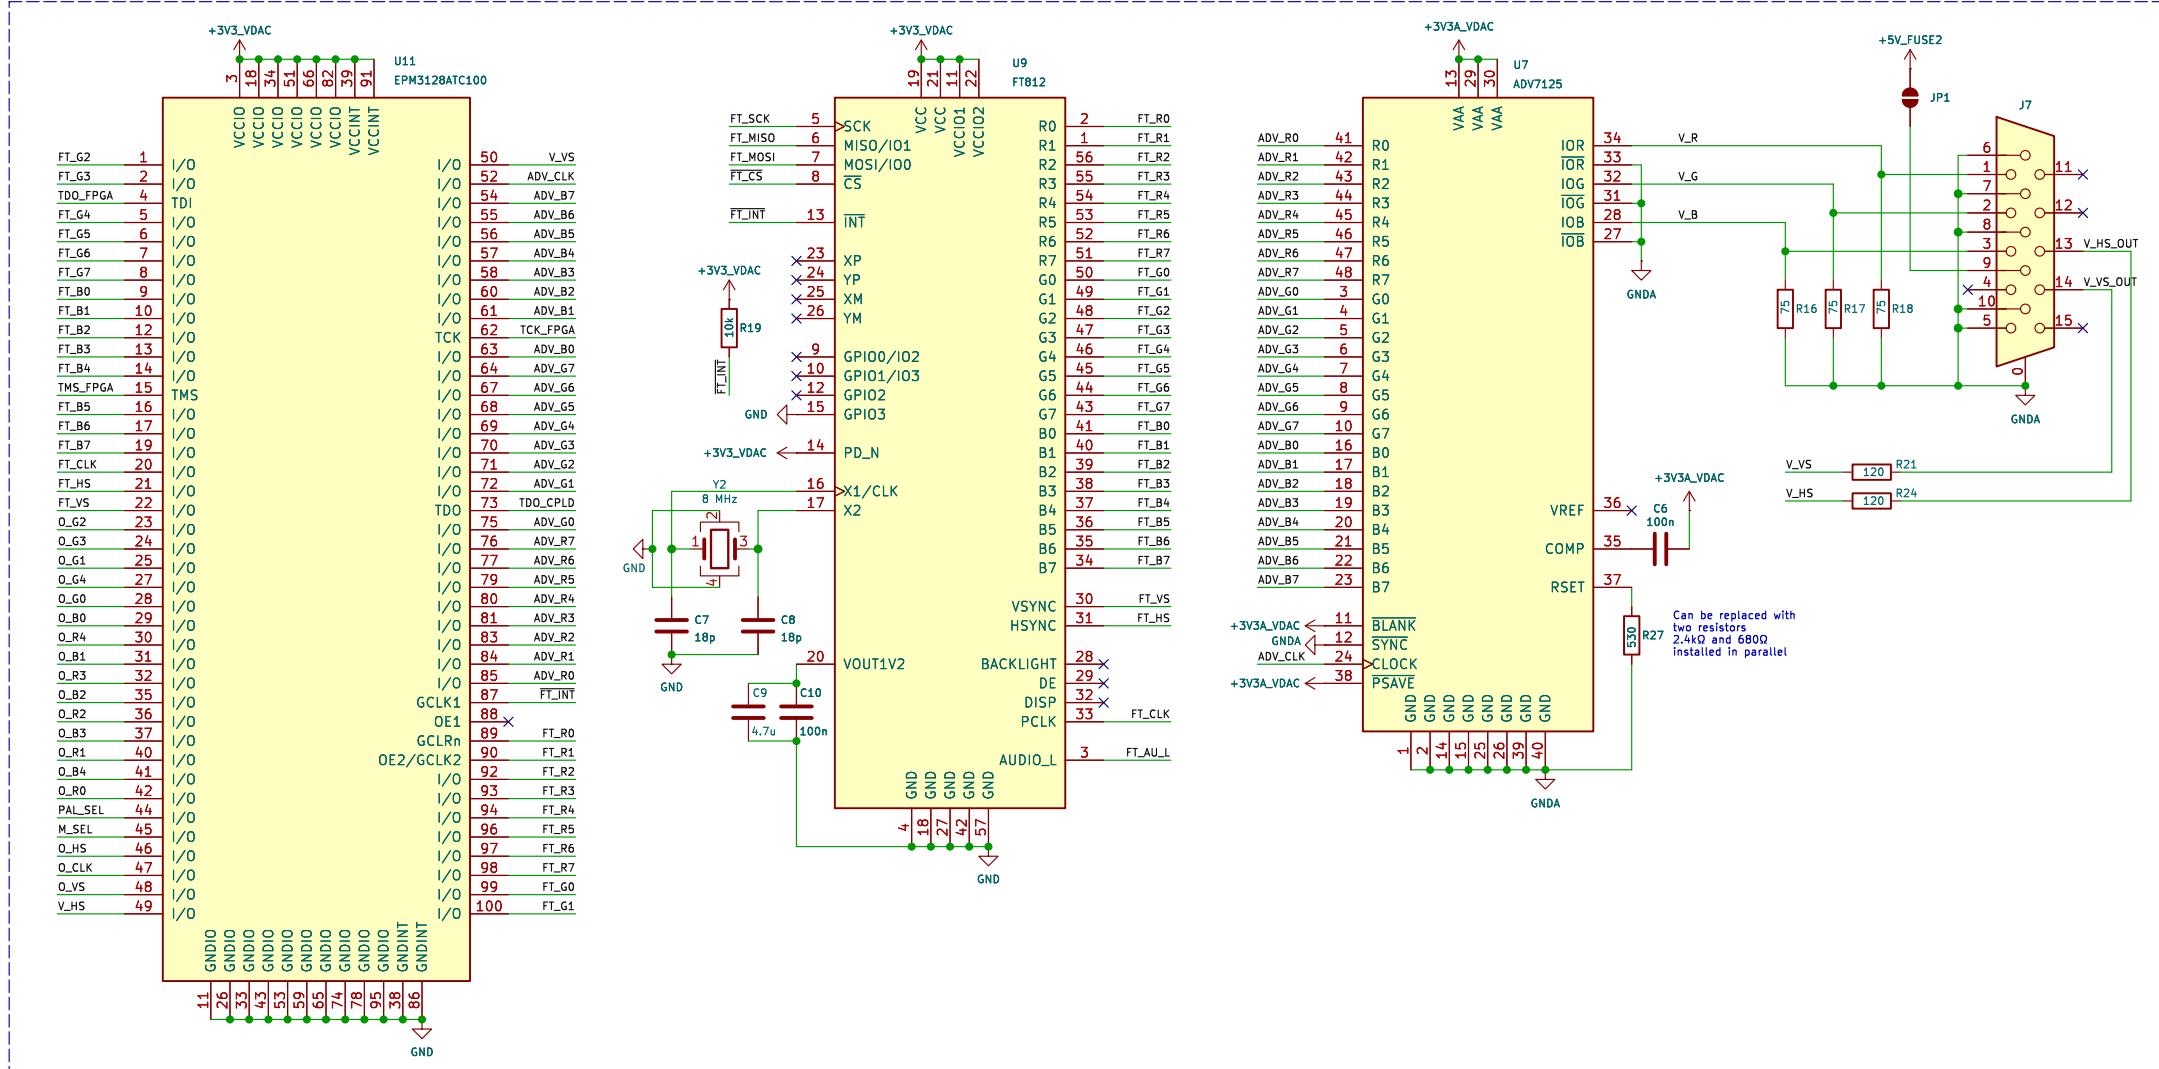


MCU

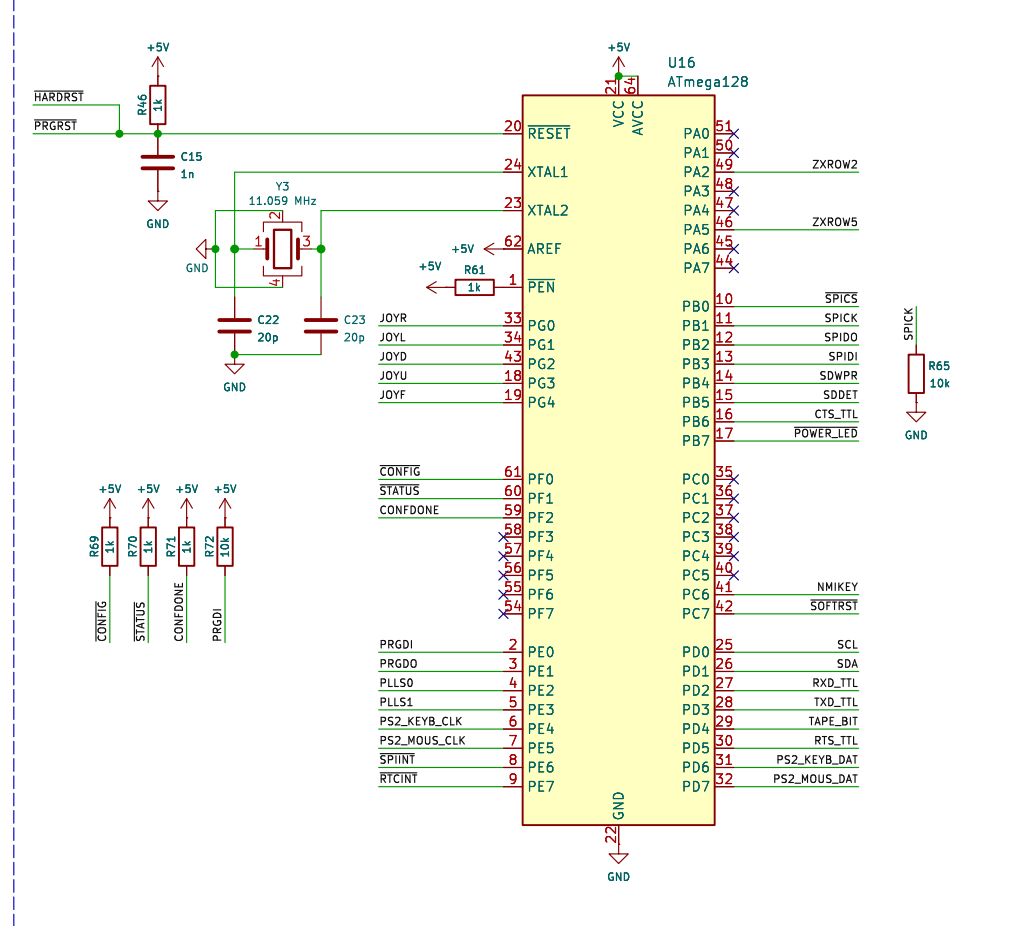


CPU

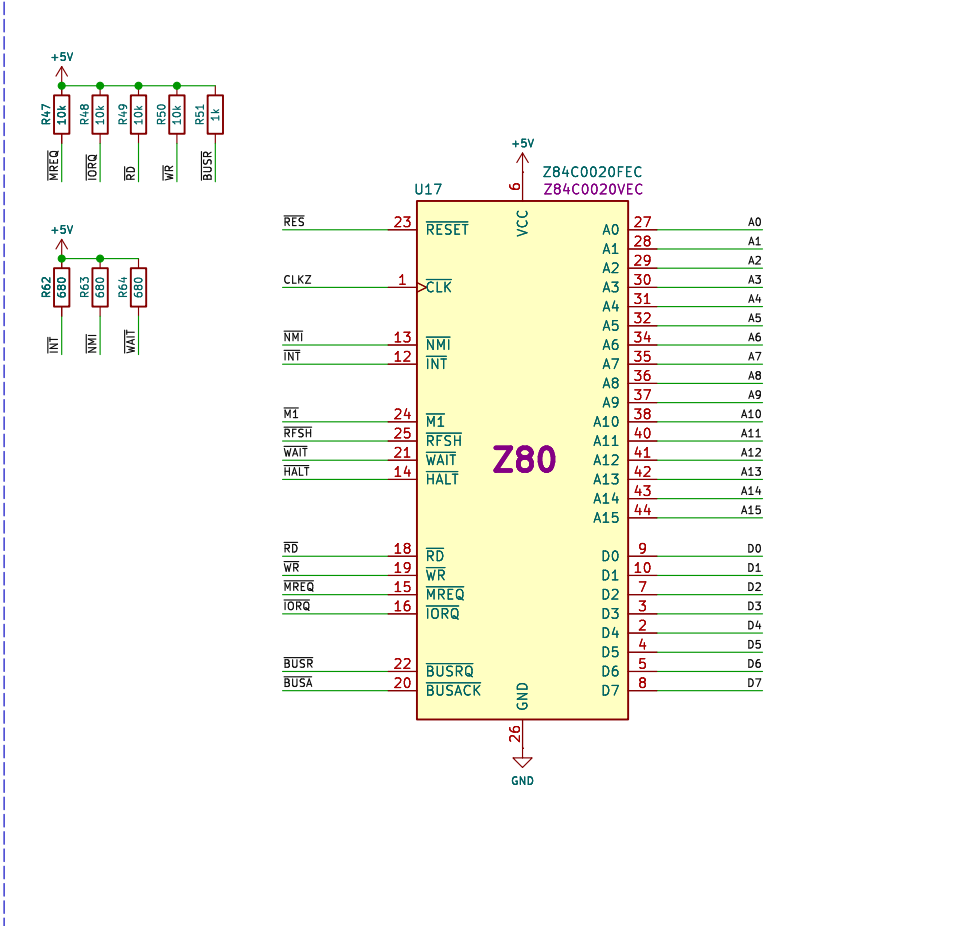


Buttons

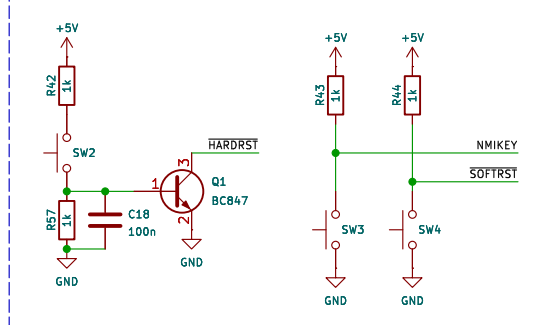


LEDs

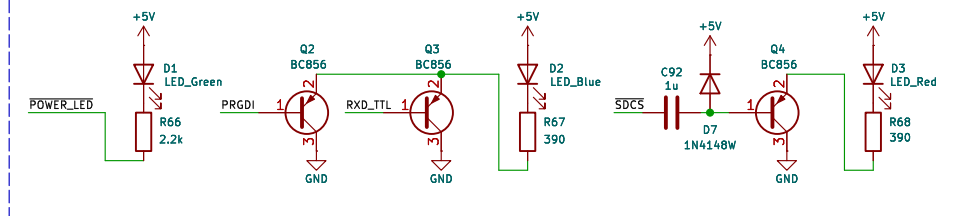


RTC

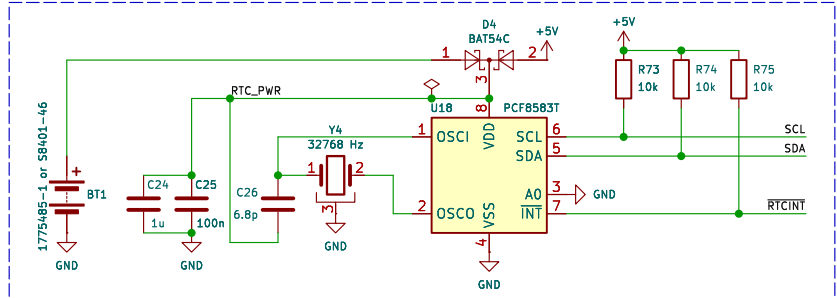


JTAG & ISP

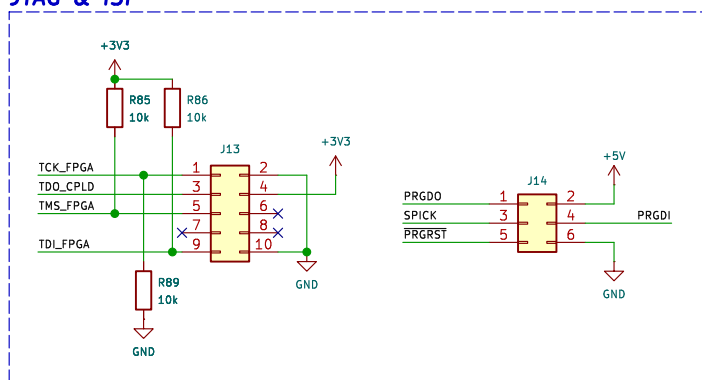


SD card

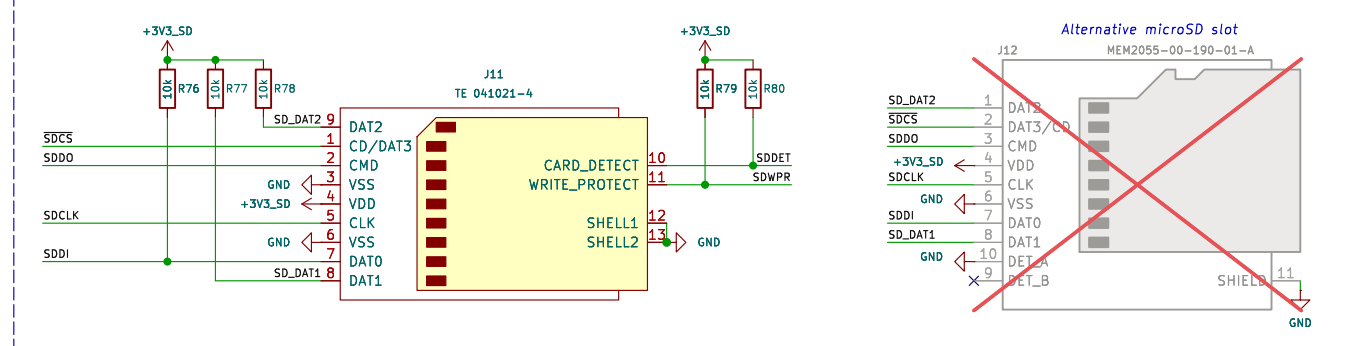


Power

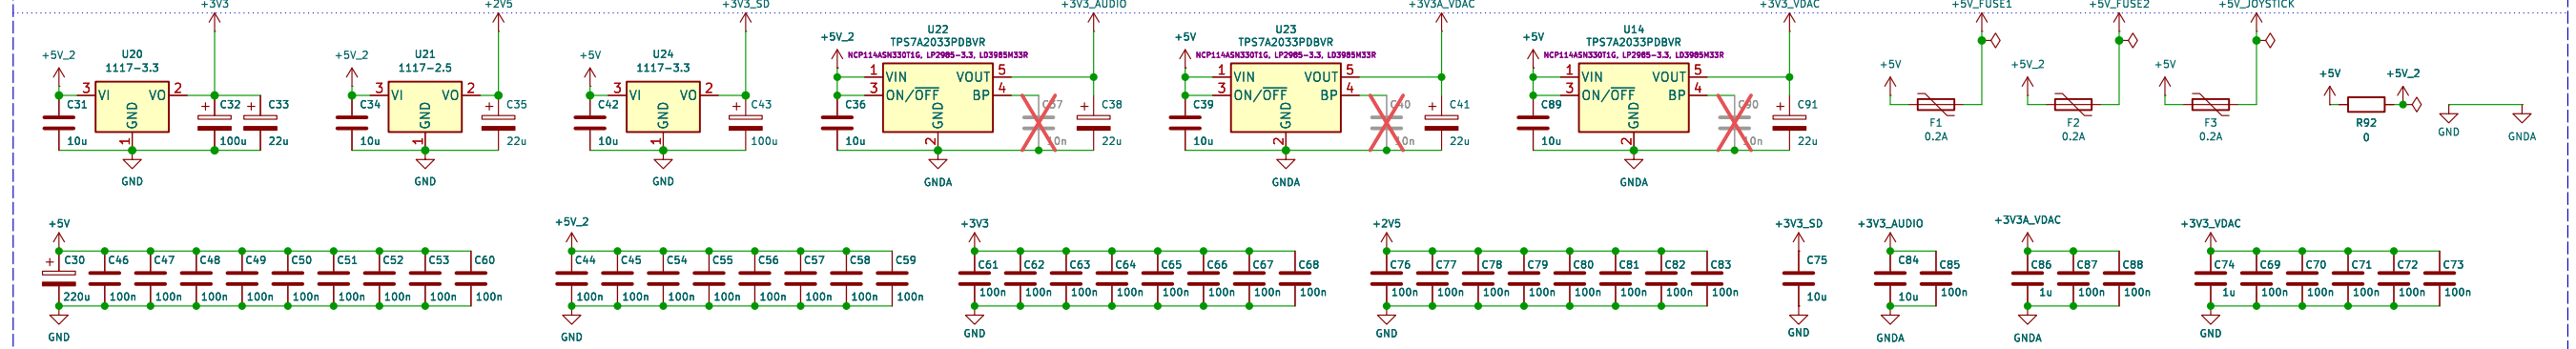

Sound

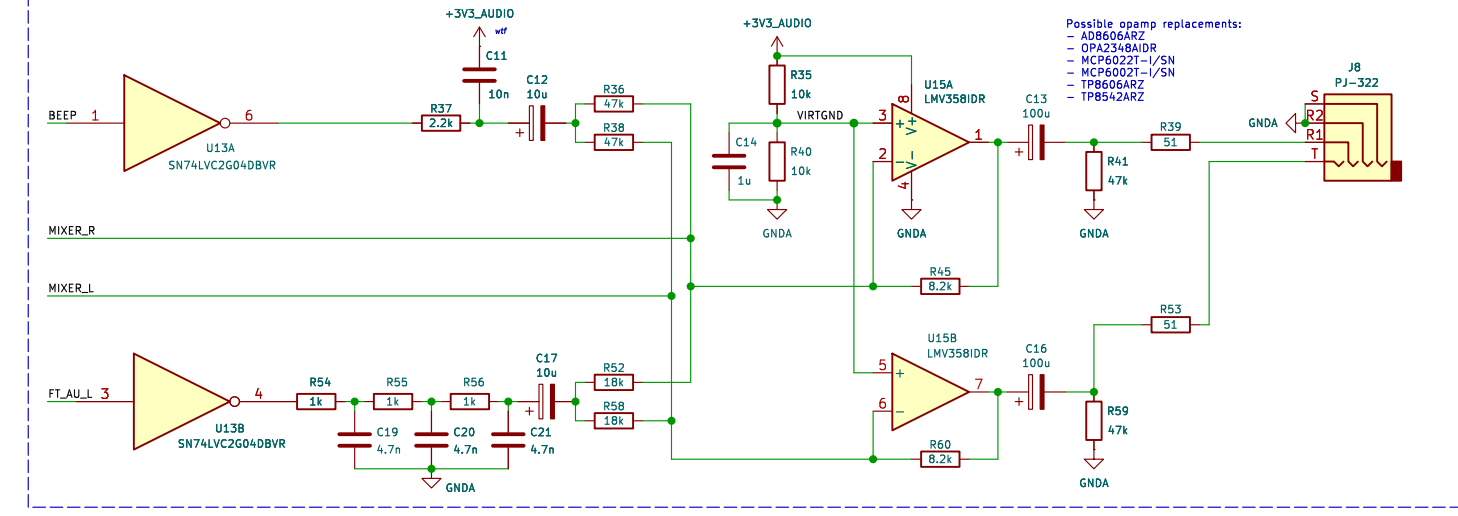

NemoBus

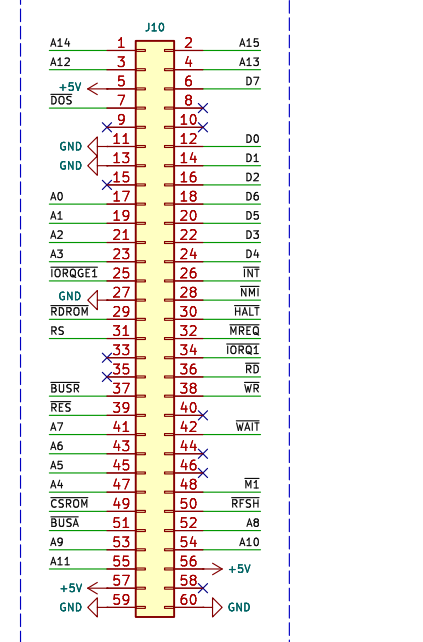



Based on ZX Evolution design by NedoPC (www.nedopc.org)
Based on VDAC2 design by TSL (tslabs.info)

Eugene Lazovsky
Sheet: /
File: zxevo1010_main.kicad.sch

Title: ZXEVO.1010
Size: User Date: 2025-04-12
KiCad E.D.A. 8.0.9

Rev: A1
Id: 1/1

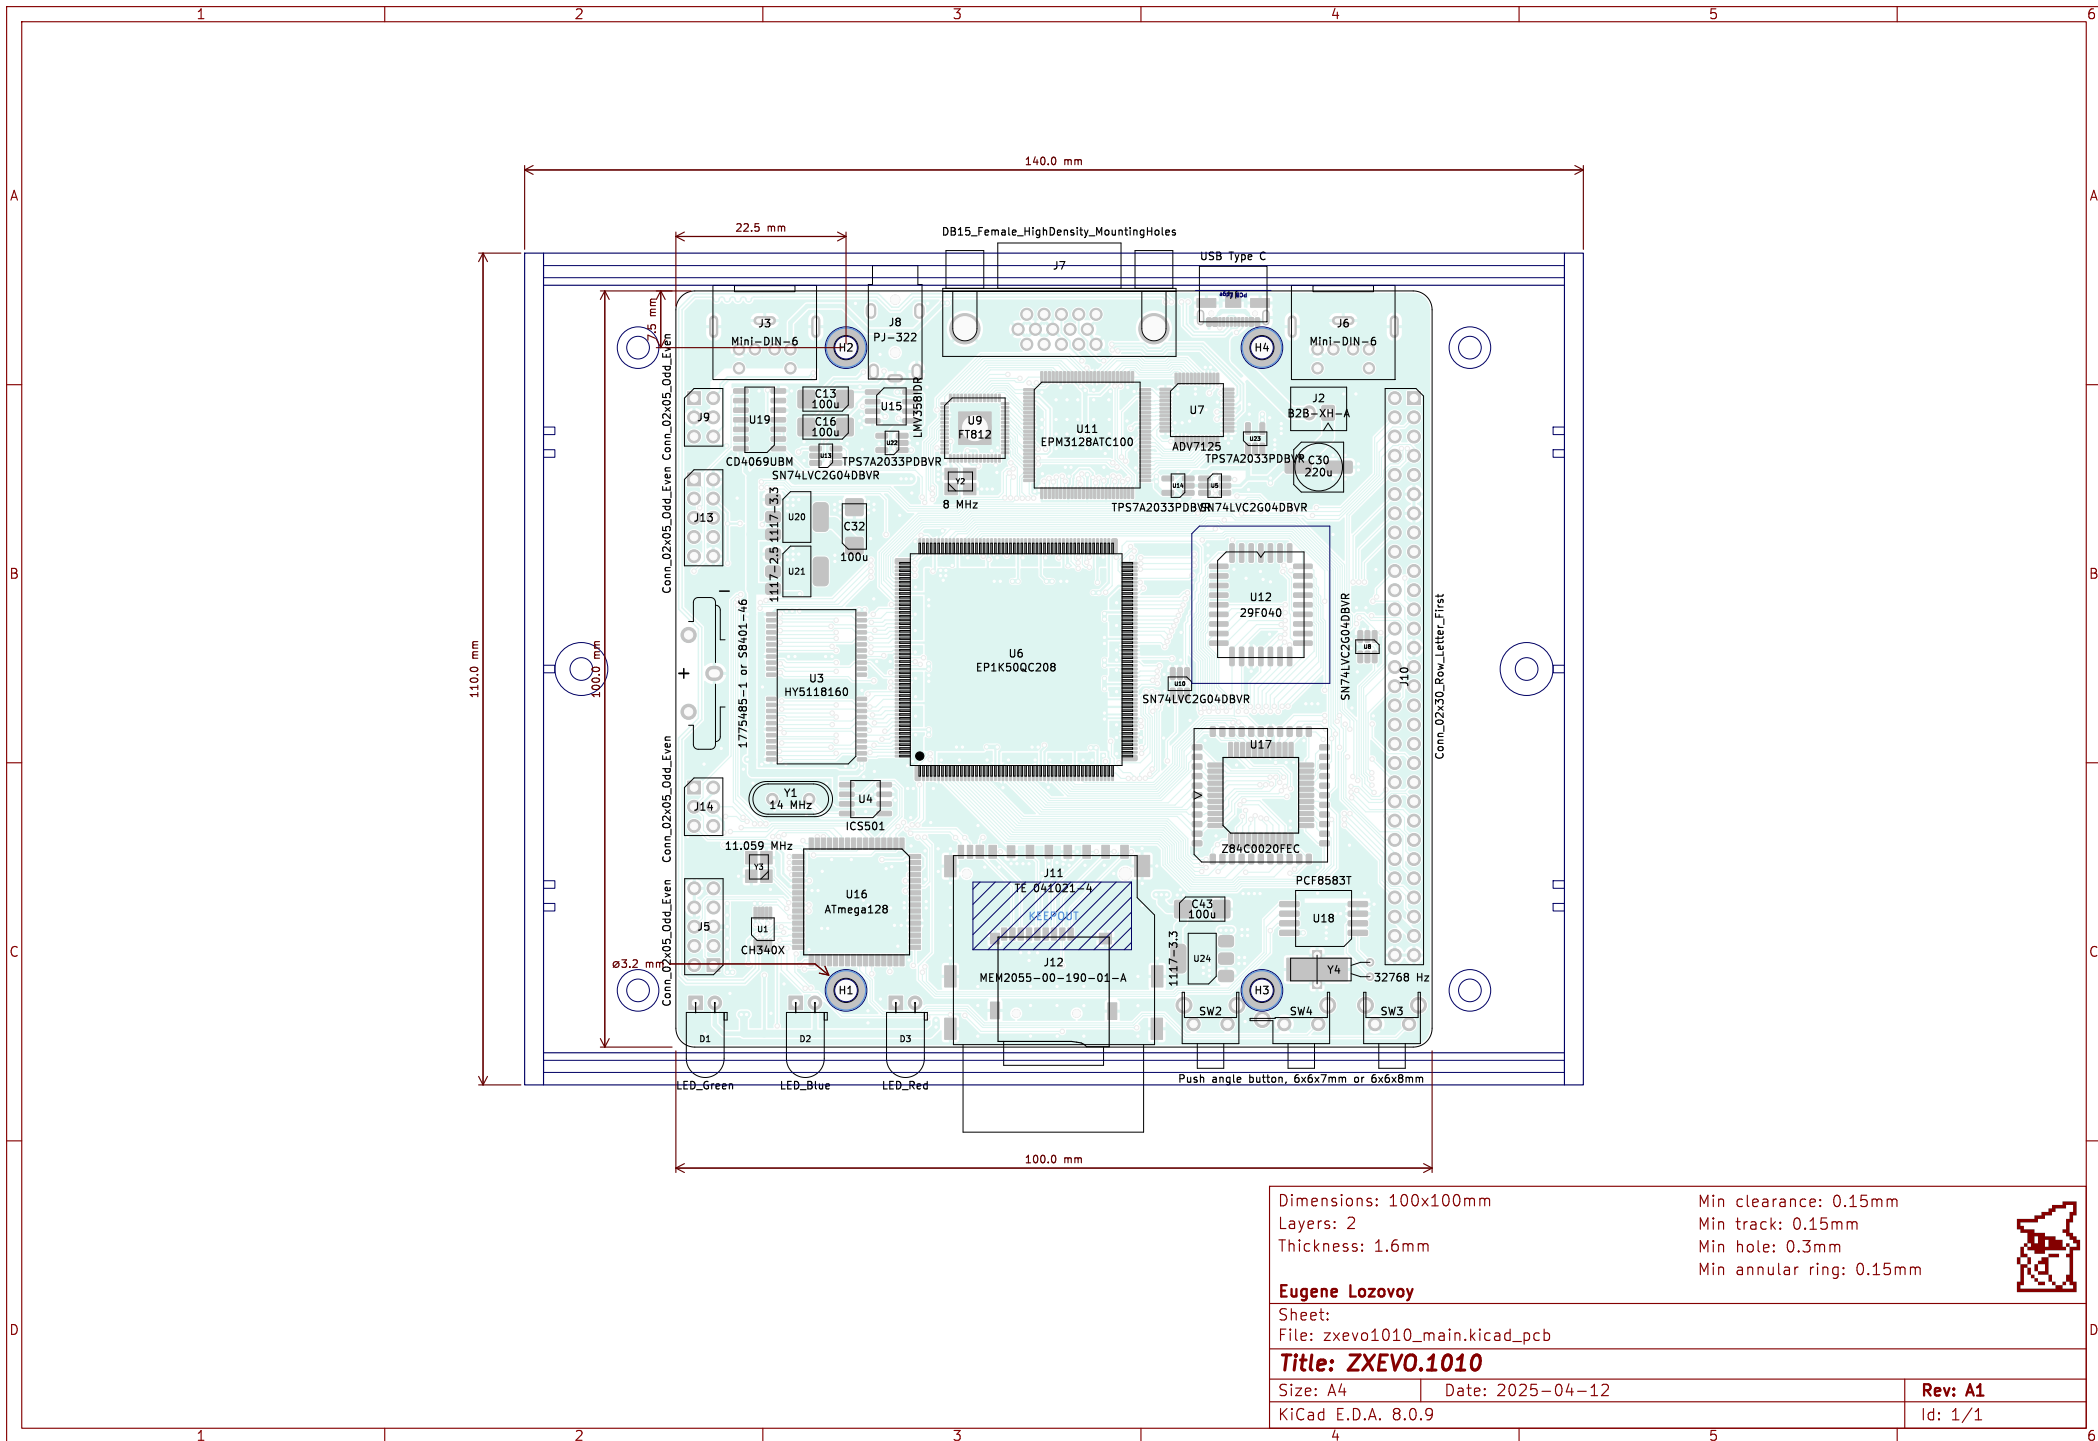

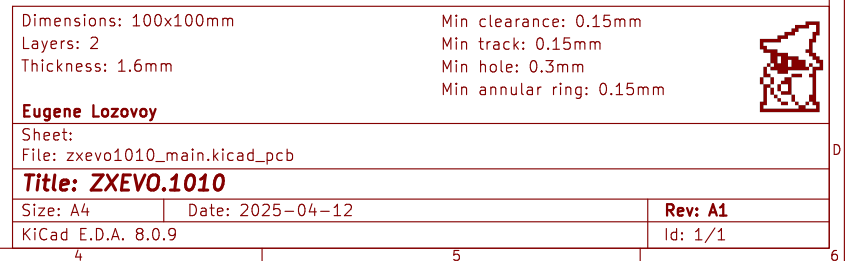

Bill Of Materials

References	Value	Footprint	Qty
BT1	1775485-1 or S8401-46	my:CR2032V	1
C1 C6 C10 C18 C25 C28 C44 C45 C46 C47 C48 C49 C50 C51 C52 C53 C54 C55 C56 C57 C58 C59 C60 C69 C70 C71 C72 C73 C85 C87 C88	100n	Capacitor_SMD:C_0603_1608Metric_Pad1.0 8x0.95mm_HandSolder	31
C2 C3 C4 C5 C22 C23	20p	Capacitor_SMD:C_0603_1608Metric_Pad1.0 8x0.95mm_HandSolder	6
C7 C8	18p	Capacitor_SMD:C_0603_1608Metric_Pad1.0 8x0.95mm_HandSolder	2
C9	4.7u	Capacitor_SMD:C_0603_1608Metric_Pad1.0 8x0.95mm_HandSolder	1
C11 C37 C40 C90	10n	Capacitor_SMD:C_0603_1608Metric_Pad1.0 8x0.95mm_HandSolder	4
C12 C17 C27 C29	10u	Capacitor_Tantalum_SMD:CP_EIA-3216-18_ Kemet-A_Pad1.58x1.35mm_HandSolder	4
C13 C16 C32 C43	100u	Capacitor_Tantalum_SMD:CP_EIA-6032-28_ Kemet-C_Pad2.25x2.35mm_HandSolder	4
C14 C24 C74 C86 C92	1u	Capacitor_SMD:C_0603_1608Metric_Pad1.0 8x0.95mm_HandSolder	5
C15	1n	Capacitor_SMD:C_0603_1608Metric_Pad1.0 8x0.95mm_HandSolder	1
C19 C20 C21	4.7n	Capacitor_SMD:C_0603_1608Metric_Pad1.0 8x0.95mm_HandSolder	3
C26	6.8p	Capacitor_SMD:C_0603_1608Metric_Pad1.0 8x0.95mm_HandSolder	1
C30	220u	Capacitor_SMD:CP_Elec_6.3x7.7	1
C31 C34 C36 C39 C42 C75 C84 C89	10u	Capacitor_SMD:C_0805_2012Metric_Pad1.1 8x1.45mm_HandSolder	8
C33 C35 C38 C41 C91	22u	Capacitor_Tantalum_SMD:CP_EIA-3216-18_ Kemet-A_Pad1.58x1.35mm_HandSolder	5
C61 C62 C63 C64 C65 C66 C67 C68 C76 C77 C78 C79 C80 C81 C82 C83	100n	Capacitor_SMD:C_0805_2012Metric_Pad1.1 8x1.45mm_HandSolder	16
D1	LED_Green	LED_THT:LED_D5.0mm_Horizontal_O1.27m m_Z3.0mm	1
D2	LED_Blue	LED_THT:LED_D5.0mm_Horizontal_O1.27m m_Z3.0mm	1
D3	LED_Red	LED_THT:LED_D5.0mm_Horizontal_O1.27m m_Z3.0mm	1
D4	BAT54C	Package_TO_SOT_SMD:SOT-23	1
D5 D6 D7	1N4148W	Diode_SMD:D_SOD-123	3
F1 F2 F3	0.2A	Fuse:Fuse_1812_4532Metric_Pad1.30x3.40 mm_HandSolder	3
H1 H2 H3 H4	Screw M3 dk=5mm L=4mm	my:MountingHole_3.2mm_M3_dk5.2mm_Ma sk	4
J1	XHP-2, SXH-002T-P0.6		1

J2	B2B-XH-A	Connector_JST:JST_XH_B2B-XH-A_1x02_P 2.50mm_Vertical	1
J3 J6	Mini-DIN-6	my:minidin-6	2
J4	USB Type C	my:USB_C_Receptacle_HRO_TYPE-C-31-M -12_dangling	1
J5 J13	Conn_02x05_Odd_Even	Connector_PinHeader_2.54mm:PinHeader_2 x05_P2.54mm_Vertical	2
J7	DB15_Female_HighDensity_Mounti ngHoles	Connector_Dsub:DSUB-15-HD_Female_Hori zontal_P2.29x1.98mm_EdgePinOffset3.03m m_Housed_MountingHolesOffset4.94mm	1
J8	PJ-322	my:PJ-322	1
J9 J14	Conn_02x05_Odd_Even	Connector_PinHeader_2.54mm:PinHeader_2 x03_P2.54mm_Vertical	2
J10	Conn_02x30_Row_Letter_First	Connector_PinSocket_2.54mm:PinSocket_2x 30_P2.54mm_Vertical	1
J11	TE 041021-4	my:SD_TE_2041021-mod	1
N1	G738 or G706	my:g738-g706	1
Q1	BC847	Package_TO_SOT_SMD:SOT-23	1
Q2 Q3 Q4	BC856	Package_TO_SOT_SMD:SOT-23	3
R1 R2 R3 R4 R5 R6 R7 R8 R9 R11 R12 R19 R22 R28 R35 R40 R47 R48 R49 R50 R65 R72 R73 R74 R75 R76 R77 R78 R79 R80 R85 R86 R89	10k	Resistor_SMD:R_0603_1608Metric_Pad0.98 x0.95mm_HandSolder	33
R10 R13 R14 R23 R25 R26 R30 R31 R32 R39 R53 R91	51	Resistor_SMD:R_0603_1608Metric_Pad0.98 x0.95mm_HandSolder	12
R15 R29 R33 R34 R62 R63 R64 R83 R87	680	Resistor_SMD:R_0603_1608Metric_Pad0.98 x0.95mm_HandSolder	9
R16 R17 R18	75	Resistor_SMD:R_0603_1608Metric_Pad0.98 x0.95mm_HandSolder	3
R20 R42 R43 R44 R46 R51 R54 R55 R56 R57 R61 R69 R70 R71 R81	1k	Resistor_SMD:R_0603_1608Metric_Pad0.98 x0.95mm_HandSolder	15
R21 R24	120	Resistor_SMD:R_0603_1608Metric_Pad0.98 x0.95mm_HandSolder	2
R27	530	Resistor_SMD:R_0603_1608Metric_Pad0.98 x0.95mm_HandSolder	1
R36 R38 R41 R59 R84 R88 R90	47k	Resistor_SMD:R_0603_1608Metric_Pad0.98 x0.95mm_HandSolder	7
R37 R66 R82	2.2k	Resistor_SMD:R_0603_1608Metric_Pad0.98 x0.95mm_HandSolder	3
R45 R60	8.2k	Resistor_SMD:R_0603_1608Metric_Pad0.98 x0.95mm_HandSolder	2
R52 R58	18k	Resistor_SMD:R_0603_1608Metric_Pad0.98 x0.95mm_HandSolder	2
R67 R68	390	Resistor_SMD:R_0603_1608Metric_Pad0.98 x0.95mm_HandSolder	2
R92	0	Resistor_SMD:R_1206_3216Metric	1
R93 R94	5.1k	Resistor_SMD:R_0603_1608Metric_Pad0.98 x0.95mm_HandSolder	2
SW1	RWB-101		1

SW2 SW3 SW4	Push angle button, 6x6x7mm or 6x6x8mm	Button_Switch_THT:SW_Tactile_SPST_Angled_PTS645Vx58-2LFS	3
U1	CH340X	Package_SO:MSOP-10_3x3mm_P0.5mm	1
U2 U3	HY5118160	my:TSOP-II-44-50_P0.8mm	2
U4	ICS501	Package_SO:SOIC-8_3.9x4.9mm_P1.27mm	1
U5 U8 U10 U13	SN74LVC2G04DBVR	Package_TO_SOT_SMD:SOT-23-6_Handsoldering	4
U6	EP1K50QC208	my:PQFP-208_28x28mm_P0.5mm_LongPads	1
U7	ADV7125	Package_QFP:TQFP-48_7x7mm_P0.5mm	1
U9	FT812	my:QFN-56-1EP_8x8mm_P0.5mm_EP4.3x4.3mm	1
U11	EPM3128ATC100	Package_QFP:TQFP-100_14x14mm_P0.5mm	1
U12	29F040	my:PLCC-32_11.4x14.0mm_P1.27mm-longpads	1
U14 U22 U23	TPS7A2033PDBVR (Alternatives: NCP114ASN330T1G, LP2985-3.3, LD3985M33R)	Package_TO_SOT_SMD:SOT-23-5_HandSoldering	3
U15	LMV358IDR	Package_SO:SOIC-8_3.9x4.9mm_P1.27mm	1
U16	ATmega128	Package_QFP:TQFP-64_14x14mm_P0.8mm	1
U17	Z84C0020FEC (Alternatives: Z84C0020VEC)	my:Z80_FEC_VEC	1
U18	PCF8583T	my:SOT176-1	1
U19	CD4069UBM	Package_SO:SO-14_3.9x8.65mm_P1.27mm	1
U20 U24	1117-3.3	Package_TO_SOT_SMD:SOT-223-3_TabPin2	2
U21	1117-2.5	Package_TO_SOT_SMD:SOT-223-3_TabPin2	1
Y1	14 MHz	Crystal:Crystal_HC49-4H_Vertical	1
Y2	8 MHz	my:Crystal_SMD_3225-4Pin_3.2x2.5mm_HandSoldering	1
Y3	11.059 MHz	my:Crystal_SMD_3225-4Pin_3.2x2.5mm_HandSoldering	1
Y4	32768 Hz	Crystal:Crystal_C38-LF_D3.0mm_L8.0mm_Horizontal_1EP_style2	1

