
## **BUILD MOBILE APP:**

## DESIGN YOUR UI TO DISPLAY THE WATER TURBIDITY PH VALUES:

Materials and system design.

The proposed domestic water temperature, pH and turbidity monitoring system consisted of a network of 3 sensors for collecting data on temperature, pH and turbidity of water. These sensors were connected to an Arduino microcontroller which processes the data before relaying it to a cloud platform through a Wi-Fi module.

the cloud platform, the information is pulled and displayed on a website. The authorities in charge are then able to monitor the data for the different water quality parameters as well as analyse the data in form of graphs. Should the data collected vary from the set standards, then the authorities are alerted instantly. Figure 1 shows the block diagram of the proposed system.

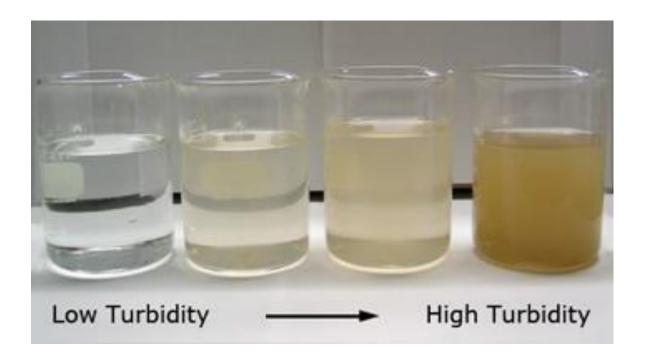

<u>Turbidity</u> is the **cloudiness** or **haziness** of a fluid caused by large numbers of individual particles that are generally invisible to the naked eye, similar to smoke in the air. The **measurement of turbidity** is a key test of **water quality** 

When it was placed in clear tap water, the system indicated that the pH was 7.54 and turbidity was 0.00 which is in line with the NWSC standards for pumped and treated water. When placed in water with settled dirt, the system displayed that the turbidity was 2969 NTUs which makes the water unpalatable since it lies out of range of the acceptable standards (greater than 5 NTUs). When placed in muddy water, the system displayed that the turbidity was 3000 NTUs which means the water was unpalatable since its turbidity was beyond the acceptable limit. All the data were captured and displayed on the website as the most recent parameter status reading. The graphs and tabular format as presented in Additional file