Assignment -4

IoT

Assignment Date	27 September 2022
Student Name	Vishnu Prasath S
Student Roll Number	420419106029
Team ID	PNT2022TMID38652
Maximum Marks	2 Marks

Question-1:

Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events. Upload document with wokwi share link and images of IBM cloud.

CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
#define ECHO_PIN 2
#define TRIG_PIN 4
#define LED 5


//IBM crediential

#define ORG "r5gra1"
#define DEVICE_TYPE "Dora"
#define DEVICE_ID "30"
#define TOKEN "12345678"



//Customise the above values

char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/type/Dora/id/30/evt/IoTSensor/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
```

```
//---

WiFiClient wifiClient;
PubSubClient client(server, 1883,wifiClient);
void setup()
{
  Serial.begin(115200);
  pinMode(TRIG_PIN, OUTPUT);
  pinMode(ECHO_PIN, INPUT);
  pinMode(LED,OUTPUT);
  delay(10);
  Serial.println();
  wificonnect();
  mqttconnect();
}

float readDistanceCM() {
  digitalWrite(TRIG_PIN, LOW);
  delayMicroseconds(2);
  digitalWrite(TRIG_PIN, HIGH);
  delayMicroseconds(10);
  digitalWrite(TRIG_PIN, LOW);
  int duration = pulseIn(ECHO_PIN, HIGH);
  return duration * 0.034 / 2;
}


void loop()
{
  float distance = readDistanceCM();
  bool isNearby = distance < 100;
  digitalWrite(LED, isNearby);
  Serial.print("Distance: ");
  Serial.println(distance);
  delay(100);
  if (isNearby == 1){
  PublishData(distance);
  }
  delay(1000);
  if (!client.loop()) {
    mqttconnect();
  }
}
```

```
void PublishData(float distance) {
  mqttconnect();
  String payload = "{\"Alert\":""\"";
  payload += distance;
  payload += " is less than 100cms\"";
  payload += "}";


  Serial.print("Sending payload: ");
  Serial.println(payload);


  if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");
   }
   else {
    Serial.println("Publish failed");
  }

}
void mqttconnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting client to ");
    Serial.println(server);
    while (!!!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }

     initManagedDevice();
     Serial.println();
  }
}
void wificonnect()
{
  Serial.println();
  Serial.print("Connecting to ");

  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.println("");
  Serial.println("WiFi connected");
  Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
}
```

```
void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic));
    Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}
```

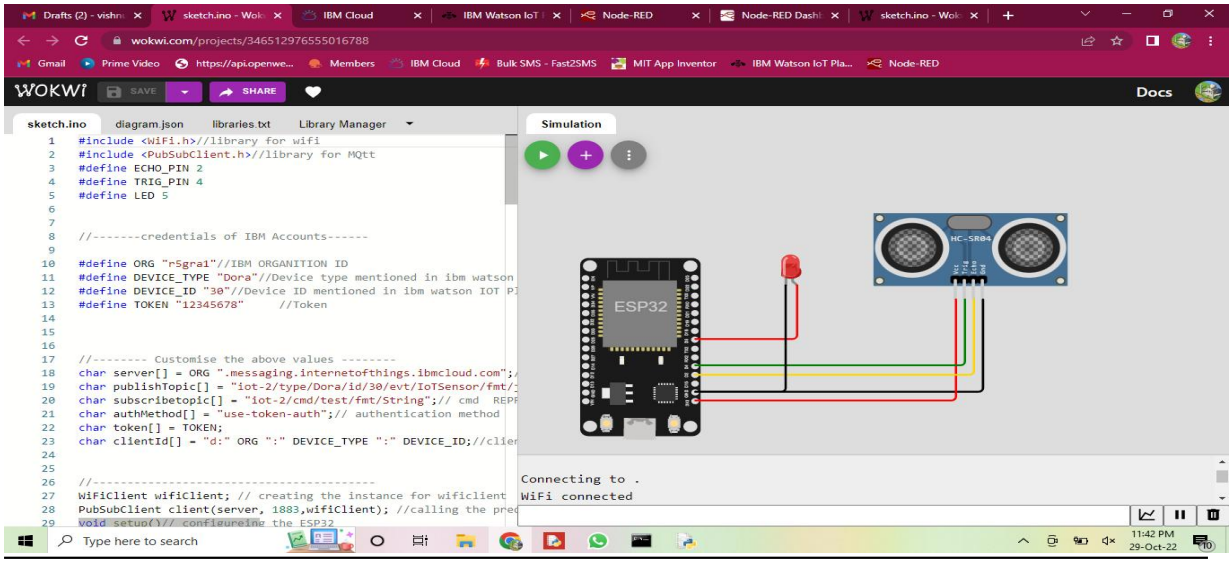

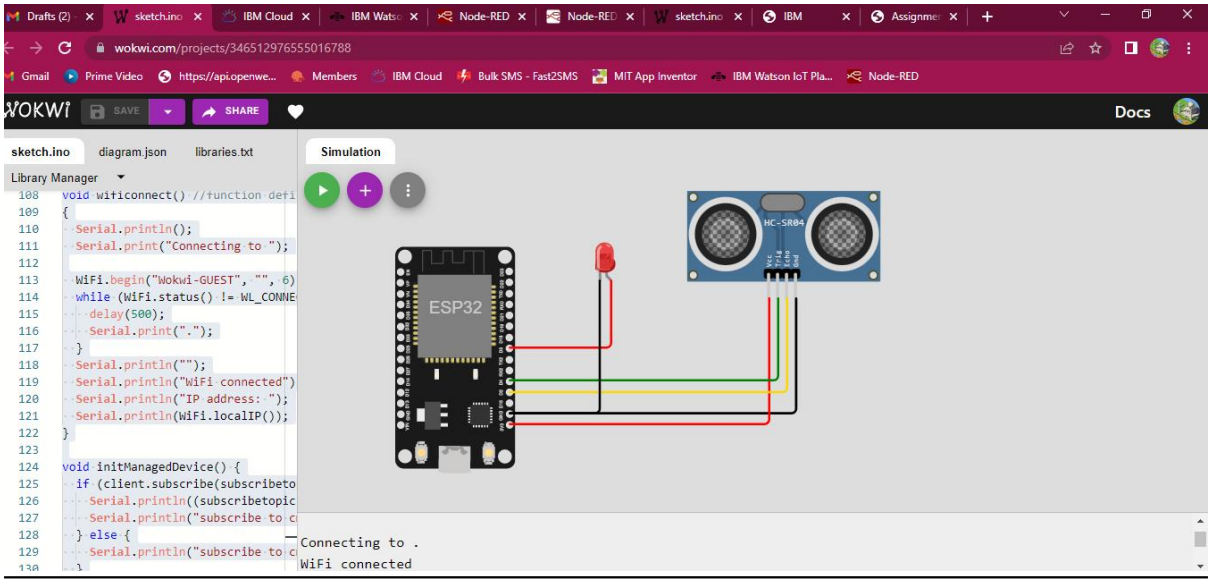

OUTPUT:

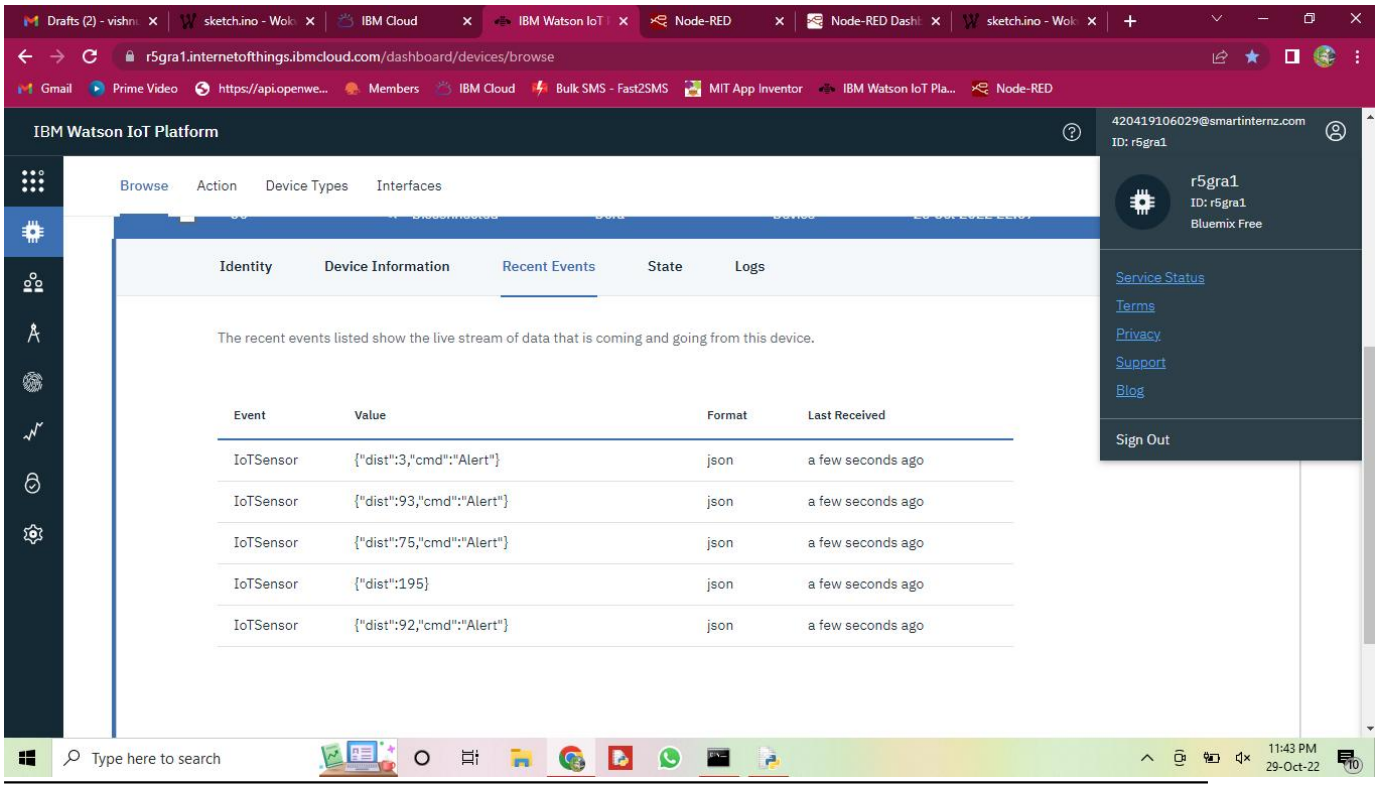

REFERENCE :

https://wokwi.com/projects/346512976555016788

https://r5gra1.internetofthings.ibmcloud.com/dashboard/devices/browse