Yusan_Engineering_2 / Main_System [S7-1500R/H-Station] / PLC_1 [CPU 1518HF-4 PN] / Program blocks / _1_Safety

Remote_Panel [FB17]

Remote_Panel Properties							
General							
Name	Remote_Panel	**Number**	17	**Type**	FB	**Language**	LAD
Numbering	Automatic						
Information							
Title		**Author**		**Comment**		**Family**	
Version	0.1	**User-defined ID**					

Remote_Panel

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Input									
ID	Int	0	Non-retain	True	True	True	False		
Overtravel_Lower_limit	Bool	false	Non-retain	True	True	True	False		
Overtravel_Upper_limit	Bool	false	Non-retain	True	True	True	False		
Estop	Bool	false	Non-retain	True	True	True	False		
Reset	Bool	false	Non-retain	True	True	True	False		
Chain_Slack_1	Bool	false	Non-retain	True	True	True	False		
Chain_Slack_2	Bool	false	Non-retain	True	True	True	False		
Chain_Slack_3	Bool	false	Non-retain	True	True	True	False		
Chain_Slack_4	Bool	false	Non-retain	True	True	True	False		
Light Guards CX101	Bool	false	Non-retain	True	True	True	False		
Light Guards CX201	Bool	false	Non-retain	True	True	True	False		
Gate_1	Bool	false	Non-retain	True	True	True	False		
Gate_2	Bool	false	Non-retain	True	True	True	False		
EStop_Lock_1	Bool	false	Non-retain	True	True	True	False		
EStop_Lock_2	Bool	false	Non-retain	True	True	True	False		
Lock_Secured_1	Bool	false	Non-retain	True	True	True	False		
Lock_Secured_2	Bool	false	Non-retain	True	True	True	False		
EStop Level 1	Bool	false	Non-retain	True	True	True	False		
EStop Level 2	Bool	false	Non-retain	True	True	True	False		
EStop Level 3	Bool	false	Non-retain	True	True	True	False		
EStop Level 4	Bool	false	Non-retain	True	True	True	False		
EStop Level 5	Bool	false	Non-retain	True	True	True	False		
EStop Level 6	Bool	false	Non-retain	True	True	True	False		
EStop Level 7	Bool	false	Non-retain	True	True	True	False		
EStop Level 8	Bool	false	Non-retain	True	True	True	False		
Bypass	"F_Bypass_RemotePanel"		Non-retain	True	True	True	False		
Overtravel_Lower_limit	Bool	false	Non-retain	True	True	True	False		
Overtravel_Upper_limit	Bool	false	Non-retain	True	True	True	False		
Estop_Main_Panel	Bool	false	Non-retain	True	True	True	False		
Chain_Slack_1	Bool	false	Non-retain	True	True	True	False		
Chain_Slack_2	Bool	false	Non-retain	True	True	True	False		
Chain_Slack_3	Bool	false	Non-retain	True	True	True	False		
Chain_Slack_4	Bool	false	Non-retain	True	True	True	False		
Light Guards CX101 - CH1	Bool	false	Non-retain	True	True	True	False		
Light Guards CX201 - CH1	Bool	false	Non-retain	True	True	True	False		
Gate_1	Bool	false	Non-retain	True	True	True	False		
Gate_2	Bool	false	Non-retain	True	True	True	False		
EStop_Lock_1	Bool	false	Non-retain	True	True	True	False		
EStop_Lock_2	Bool	false	Non-retain	True	True	True	False		
Lock_Secured_1	Bool	false	Non-retain	True	True	True	False		
Lock_Secured_2	Bool	false	Non-retain	True	True	True	False		
EStop Level 1	Bool	false	Non-retain	True	True	True	False		
EStop Level 2	Bool	false	Non-retain	True	True	True	False		
EStop Level 3	Bool	false	Non-retain	True	True	True	False		
EStop Level 4	Bool	false	Non-retain	True	True	True	False		
EStop Level 5	Bool	false	Non-retain	True	True	True	False		
EStop Level 6	Bool	false	Non-retain	True	True	True	False		
EStop Level 7	Bool	false	Non-retain	True	True	True	False		
EStop Level 8	Bool	false	Non-retain	True	True	True	False		
Material_Selection_1	Bool	false	Non-retain	True	True	True	False		
MR_1	Bool	false	Non-retain	True	True	True	False		
Material_Selection_2	Bool	false	Non-retain	True	True	True	False		
MR_2	Bool	false	Non-retain	True	True	True	False		
Output									
Safety_OK	Bool	false	Non-retain	True	True	True	False		

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Bypass_Warning	Bool	false	Non-retain	True	True	True	False		
STO VTD - CH1	Bool	false	Non-retain	True	True	True	False		
STO VTD - CH2	Bool	false	Non-retain	True	True	True	False		
STO CONVEYOR VTD - CH1	Bool	false	Non-retain	True	True	True	False		
STO CONVEYOR VTD - CH2	Bool	false	Non-retain	True	True	True	False		
STO CNV VFD (Level 1,2,3 - Side1) - CH1	Bool	false	Non-retain	True	True	True	False		
STO CNV VFD (Level 1,2,3 - Side1) - CH2	Bool	false	Non-retain	True	True	True	False		
STO CNV VFD (Level 1,2,3 - Side2) - CH1	Bool	false	Non-retain	True	True	True	False		
STO CNV VFD (Level 1,2,3 - Side2) - CH2	Bool	false	Non-retain	True	True	True	False		
STO CNV VFD (Level 4,5,6 - Side1) - CH1	Bool	false	Non-retain	True	True	True	False		
STO CNV VFD (Level 4,5,6 - Side1) - CH2	Bool	false	Non-retain	True	True	True	False		
STO CNV VFD (Level 4,5,6 - Side2) - CH1	Bool	false	Non-retain	True	True	True	False		
STO CNV VFD (Level 4,5,6 - Side2) - CH2	Bool	false	Non-retain	True	True	True	False		
STO CNV VFD (Level 7,8 - Side1) - CH1	Bool	false	Non-retain	True	True	True	False		
STO CNV VFD (Level 7,8 - Side1) - CH2	Bool	false	Non-retain	True	True	True	False		
STO CNV VFD (Level 7,8 - Side2) - CH1	Bool	false	Non-retain	True	True	True	False		
STO CNV VFD (Level 7,8 - Side2) - CH2	Bool	false	Non-retain	True	True	True	False		
Power Enable Safety Stopper Conveyors (Level 1,2,3 - Side1) - CH1	Bool	false	Non-retain	True	True	True	False		
Power Enable Safety Stopper Conveyors (Level 1,2,3 - Side1) - CH2	Bool	false	Non-retain	True	True	True	False		
Power Enable Safety Stopper Conveyors (Level 1,2,3 - Side2) - CH1	Bool	false	Non-retain	True	True	True	False		
Power Enable Safety Stopper Conveyors (Level 1,2,3 - Side2) - CH2	Bool	false	Non-retain	True	True	True	False		
Power Enable Safety Stopper Conveyors (Level 4,5,6 - Side1) - CH1	Bool	false	Non-retain	True	True	True	False		
Power Enable Safety Stopper Conveyors (Level 4,5,6 - Side1) - CH2	Bool	false	Non-retain	True	True	True	False		
Power Enable Safety Stopper Conveyors (Level 4,5,6 - Side2) - CH1	Bool	false	Non-retain	True	True	True	False		
Power Enable Safety Stopper Conveyors (Level 4,5,6 - Side2) - CH2	Bool	false	Non-retain	True	True	True	False		
Power Enable Safety Stopper Conveyors (Level 7,8 - Side1) - CH1	Bool	false	Non-retain	True	True	True	False		
Power Enable Safety Stopper Conveyors (Level 7,8 - Side1) - CH2	Bool	false	Non-retain	True	True	True	False		
Power Enable Safety Stopper Conveyors (Level 7,8 - Side2) - CH1	Bool	false	Non-retain	True	True	True	False		
Power Enable Safety Stopper Conveyors (Level 7,8 - Side2) - CH2	Bool	false	Non-retain	True	True	True	False		
VTU Hoist Brake Sfty Enable - CH1	Bool	false	Non-retain	True	True	True	False		
VTU Hoist Brake Sfty Enable - CH2	Bool	false	Non-retain	True	True	True	False		
ACK	Bool	false	Non-retain	False	False	False	False		
L1_OK	Bool	false	Non-retain	True	True	True	False		
L2_OK	Bool	false	Non-retain	True	True	True	False		
L3_OK	Bool	false	Non-retain	True	True	True	False		
L4_OK	Bool	false	Non-retain	True	True	True	False		
L5_OK	Bool	false	Non-retain	True	True	True	False		
L6_OK	Bool	false	Non-retain	True	True	True	False		
L7_OK	Bool	false	Non-retain	True	True	True	False		
L8_OK	Bool	false	Non-retain	True	True	True	False		
EStop_Lock_1_OK	Bool	false	Non-retain	True	True	True	False		

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
EStop_Lock_2_OK	Bool	false	Non-retain	True	True	True	False		
Lock_Secured_1_OK	Bool	false	Non-retain	True	True	True	False		
Lock_Secured_2_OK	Bool	false	Non-retain	True	True	True	False		
Safety_Ok_Conf	Bool	false	Non-retain	True	True	True	False		
InOut									
▼ Static									
▼ Overtravel_Lower_Limit_DB	ESTOP1			True	True	True	False		
▼ Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
▼ Overtravel_Upper_Limit_DB	ESTOP1			True	True	True	False		
▼ Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
▼ Estop_Cabinet_DB	ESTOP1			True	True	True	False		
▼ Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
▼ Chain_Slack_1_DB	ESTOP1			True	True	True	False		
▼ Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
▼ Chain_Slack_2_DB	ESTOP1			True	True	True	False		
▼ Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
Chain_Slack_3_DB	ESTOP1			True	True	True	False		
Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
Chain_Slack_4_DB	ESTOP1			True	True	True	False		
Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
Light_Guards_CX101	ESTOP1			True	True	True	False		
Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
Light_Guards_CX201	ESTOP1			True	True	True	False		
Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
Gate_1_DB	ESTOP1			True	True	True	False		
Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
Gate_2_DB	ESTOP1			True	True	True	False		
Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
EStop_Lock_1_DB	ESTOP1			True	True	True	False		
Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
EStop_Lock_2_DB	ESTOP1			True	True	True	False		
Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
Lock_Secured_1_DB	ESTOP1			True	True	True	False		
Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
Lock_Secured_2_DB	ESTOP1			True	True	True	False		

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
▼ EStop Level 1_DB	ESTOP1			True	True	True	False		
▼ Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
▼ EStop Level 2_DB	ESTOP1			True	True	True	False		
▼ Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
▼ EStop Level 3_DB	ESTOP1			True	True	True	False		
▼ Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
▼ EStop Level 4_DB	ESTOP1			True	True	True	False		
▼ Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
EStop Level 5_DB	ESTOP1			True	True	True	False		
Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
EStop Level 6_DB	ESTOP1			True	True	True	False		
Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
EStop Level 7_DB	ESTOP1			True	True	True	False		
Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
EStop Level 8_DB	ESTOP1			True	True	True	False		
Input									
E_STOP	Bool	false	Non-retain	True	True	True	False		Emercency STOP
ACK_NEC	Bool	true	Non-retain	True	True	True	False		1=Acknowledgment necessary
ACK	Bool	false	Non-retain	True	True	True	False		1=Acknowledgment
TIME_DEL	Time	0	Non-retain	True	True	True	False		Time delay
Output									
Q	Bool	false	Non-retain	True	True	True	False		1=Enable
Q_DELAY	Bool	false	Non-retain	True	True	True	False		Enable is OFF delayed
ACK_REQ	Bool	false	Non-retain	True	True	True	False		1=acknowledgment request
DIAG	Byte	B#16#00	Non-retain	True	True	True	False		Service information
InOut									
Static									
Mute_LG_1_DB	"SICK Safe Entry Exit HW PLC V02"			True	True	True	False		compiled for S7-1500F hardware controllers
Input									
########## BASIC_INPUTS ##########	Bool	false	Non-retain	True	True	True	False		
I_S_ESPE_Channel_1	Bool	false	Non-retain	True	True	True	False		
I_S_ESPE_Channel_2	Bool	false	Non-retain	True	True	True	False		
I_S_PLC_request (MR)	Bool	false	Non-retain	True	True	True	False		
I_S_Time_extension (TE)	Bool	false	Non-retain	True	True	True	False		
I_S_Reset	Bool	false	Non-retain	True	True	True	False		
I_S_Override hold-to-run-device	Bool	false	Non-retain	True	True	True	False		
I_S_first_logic_cycle	Bool	false	Non-retain	True	True	True	False		

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
I_S_Disc_Time_MR_and_TE	Time	t#500ms	Non-retain	True	True	True	False		
########## MATERIAL_SELECTION_INPUTS ##########	Bool	false	Non-retain	True	True	True	False		
I_S_Material_selection_1	Bool	false	Non-retain	True	True	True	False		
I_S_Material_selection_2	Bool	false	Non-retain	True	True	True	False		
I_S_Material_selection_3	Bool	false	Non-retain	True	True	True	False		
I_S_Material_selection_4	Bool	false	Non-retain	True	True	True	False		
########## MATERIAL_TOLERANCE_LENGTH in mm ##########	Bool	false	Non-retain	True	True	True	False		
I_S_Material_tolerance_length_Material_1-4	DInt	100	Non-retain	True	True	True	False		
########## MAX_DISTANCE_MATERIAL_ESPE in mm ##########	Bool	false	Non-retain	True	True	True	False		
I_S_Max_distance_Material_to_ESPE	DInt	0	Non-retain	True	True	True	False		
########## MATERIAL_LENGH_1-4 in mm ##########	Bool	false	Non-retain	True	True	True	False		
I_S_Material_length_Material_1	DInt	0	Non-retain	True	True	True	False		
I_S_Material_length_Material_2	DInt	0	Non-retain	True	True	True	False		
I_S_Material_length_Material_3	DInt	0	Non-retain	True	True	True	False		
I_S_Material_length_Material_4	DInt	0	Non-retain	True	True	True	False		
########## MATERIAL_SPEED_1-4 in mm/s ##########	Bool	false	Non-retain	True	True	True	False		
I_S_Material_speed_Material_1	DInt	0	Non-retain	True	True	True	False		
I_S_Material_speed_Material_2	DInt	0	Non-retain	True	True	True	False		
I_S_Material_speed_Material_3	DInt	0	Non-retain	True	True	True	False		
I_S_Material_speed_Material_4	DInt	0	Non-retain	True	True	True	False		
▼ Output									
########## BASIC_OUTPUTS ##########	Bool	false	Non-retain	True	True	True	False		
Q_Safety_release_1	Bool	false	Non-retain	True	True	True	False		
Q_Safety_release_2	Bool	false	Non-retain	True	True	True	False		
Q_SEE_Status	Bool	false	Non-retain	True	True	True	False		
Q_Override_Status	Bool	false	Non-retain	True	True	True	False		
Q_Reset_required	Bool	false	Non-retain	True	True	True	False		
Q_Sequence_OK	Bool	false	Non-retain	True	True	True	False		
########## ERRORS ##########	Bool	false	Non-retain	True	True	True	False		
Error	Word	0	Non-retain	True	True	True	False		
InOut									
▼ Static									
## BASIC SIGNALS ##	Bool	false	Non-retain	True	True	True	False		
ESPE	Bool	false	Non-retain	True	True	True	False		
SEE_active	Bool	false	Non-retain	True	True	True	False		
SEE_inactive	Bool	false	Non-retain	True	True	True	False		
PLC_request	Bool	false	Non-retain	True	True	True	False		
Time_extension	Bool	false	Non-retain	True	True	True	False		
PLC_request_end	Bool	false	Non-retain	True	True	True	False		
TE_signal_error	Bool	false	Non-retain	True	True	True	False		
PLC_error	Bool	false	Non-retain	True	True	True	False		
Timing_selection_error	Bool	false	Non-retain	True	True	True	False		
Initiation_Error	Bool	false	Non-retain	True	True	True	False		
SSE_aditional_release	Bool	false	Non-retain	True	True	True	False		
Initiation	Bool	false	Non-retain	True	True	True	False		
Termination	Bool	false	Non-retain	True	True	True	False		
Termination_Seq_good	Bool	false	Non-retain	True	True	True	False		
Override_status	Bool	false	Non-retain	True	True	True	False		

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Sequence_Signals_good	Bool	false	Non-retain	True	True	True	False		
Material_1	Bool	false	Non-retain	True	True	True	False		
Material_2	Bool	false	Non-retain	True	True	True	False		
Material_3	Bool	false	Non-retain	True	True	True	False		
Material_4	Bool	false	Non-retain	True	True	True	False		
Min_time_good	Bool	false	Non-retain	True	True	True	False		
Max_time_Error	Bool	false	Non-retain	True	True	True	False		
TON_Tact_Lamps	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
TOF_Tact_Lamps	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
Neg_Flag_Lamps	Bool	false	Non-retain	True	True	True	False		
Blinking_tact	Bool	false	Non-retain	True	True	True	False		
Always_0	Bool	FALSE	Non-retain	True	True	True	False		
Always_1	Bool	TRUE	Non-retain	True	True	True	False		
b_Sequence_Start	Bool	false	Non-retain	True	True	True	False		
b_Sequence_OK	Bool	false	Non-retain	True	True	True	False		
Sequence_OK	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
## END BASIC SIGNALS ##	Bool	false	Non-retain	True	True	True	False		
### CLOCK GENERATOR ###	Bool	false	Non-retain	True	True	True	False		
CLK_GEN_Edge_neg_1	Bool	false	Non-retain	True	True	True	False		
CLK_GEN_TON_Timer_1	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
CLK_GEN_TOF_Timer_1	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
CLK_GEN_Tact	Bool	false	Non-retain	True	True	True	False		
### END CLOCK GENERATOR ###	Bool	false	Non-retain	True	True	True	False		
### INITIATION ###	Bool	false	Non-retain	True	True	True	False		
INIT_HM_1	Bool	false	Non-retain	True	True	True	False		
INIT_HM_2	Bool	false	Non-retain	True	True	True	False		
INIT_HM_3	Bool	false	Non-retain	True	True	True	False		
INIT_Edge_neg_1	Bool	false	Non-retain	True	True	True	False		
### END INITIATION ###	Bool	false	Non-retain	True	True	True	False		
### MIN MAX TIME MONITORING ###	Bool	false	Non-retain	True	True	True	False		
MM_TIME_MONT_FI_neg_1	Bool	false	Non-retain	True	True	True	False		
▼ MM_TIME_MONT_TOF_Timer_1	TOF			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
MM_TIME_MONT_Int_timer_reset	Bool	false	Non-retain	True	True	True	False		
▼ MM_TIME_MONT_Counter_up_1	CTU			True	True	True	False		
▼ Input									
CU	Bool	false	Non-retain	True	True	True	False		Count input
R	Bool	false	Non-retain	True	True	True	False		Reset input
PV	Int	0	Non-retain	True	True	True	False		Value at which the output Q is set
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Counter status
CV	Int	0	Non-retain	True	True	True	False		Actual count value
InOut									
Static									
▼ MM_TIME_MONT_Counter_up_2	CTU			True	True	True	False		
▼ Input									
CU	Bool	false	Non-retain	True	True	True	False		Count input
R	Bool	false	Non-retain	True	True	True	False		Reset input
PV	Int	0	Non-retain	True	True	True	False		Value at which the output Q is set
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Counter status
CV	Int	0	Non-retain	True	True	True	False		Actual count value
InOut									
Static									
MM_TIME_MONT_SEE_act_neg_edge	Bool	false	Non-retain	True	True	True	False		
MM_TIME_MONT_Timer_reset	Bool	false	Non-retain	True	True	True	False		
MM_TIME_MONT_TE_inactive	Bool	false	Non-retain	True	True	True	False		
MM_TIME_MONT_TE_Timeout	Bool	false	Non-retain	True	True	True	False		
MM_TIME_MONT_SEE_Timing_1	Bool	false	Non-retain	True	True	True	False		
MM_TIME_MONT_SEE_Timing_2	Bool	false	Non-retain	True	True	True	False		
MM_TIME_MONT_SEE_Timing_3	Bool	false	Non-retain	True	True	True	False		
MM_TIME_MONT_SEE_Timing_4	Bool	false	Non-retain	True	True	True	False		
### END MIN MAX TIME MONITORING ###	Bool	false	Non-retain	True	True	True	False		

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
### MULTIPLE STORE ###	Bool	false	Non-retain	True	True	True	False		
MUL_STORE_Edge_pos_1	Bool	false	Non-retain	True	True	True	False		
MUL_STORE_Save_Signal_1	Bool	false	Non-retain	True	True	True	False		
MUL_STORE_Save_Signal_2	Bool	false	Non-retain	True	True	True	False		
MUL_STORE_Save_Signal_3	Bool	false	Non-retain	True	True	True	False		
MUL_STORE_Save_Signal_4	Bool	false	Non-retain	True	True	True	False		
MUL_STORE_Save_Signal_5	Bool	false	Non-retain	True	True	True	False		
MUL_STORE_Save_Signal_6	Bool	false	Non-retain	True	True	True	False		
MUL_STORE_Save_Signal_7	Bool	false	Non-retain	True	True	True	False		
### END MULTIPLE STORE ###	Bool	false	Non-retain	True	True	True	False		
### OPERATION SELECTOR ###	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Input_change	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Last_Cycle_Out_1	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Last_Cycle_Out_2	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Last_Cycle_Out_3	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Last_Cycle_Out_4	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Last_Cycle_Out_5	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Last_Cycle_Out_6	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Last_Cycle_Out_7	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Last_Cycle_Out_8	Bool	false	Non-retain	True	True	True	False		
OP_SEL_HM_out_1	Bool	false	Non-retain	True	True	True	False		
OP_SEL_HM_out_2	Bool	false	Non-retain	True	True	True	False		
OP_SEL_HM_out_3	Bool	false	Non-retain	True	True	True	False		
OP_SEL_HM_out_4	Bool	false	Non-retain	True	True	True	False		
OP_SEL_HM_out_5	Bool	false	Non-retain	True	True	True	False		
OP_SEL_HM_out_6	Bool	false	Non-retain	True	True	True	False		
OP_SEL_HM_out_7	Bool	false	Non-retain	True	True	True	False		
OP_SEL_HM_out_8	Bool	false	Non-retain	True	True	True	False		
▼ OP_SEL_TON_Timer_1	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ OP_SEL_TON_Timer_2	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
OP_SEL_Timing_1	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Timing_2	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Timing_3	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Timing_4	Bool	false	Non-retain	True	True	True	False		
### END OPERATION SELECTOR ###	Bool	false	Non-retain	True	True	True	False		

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
### RESET1 ###	Bool	false	Non-retain	True	True	True	False		
RESET1_Edge_neg_1	Bool	false	Non-retain	True	True	True	False		
RESET1_M_Reset	Bool	false	Non-retain	True	True	True	False		
▼ RESET1_TON_TIMER_1	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ RESET1_TON_TIMER_2	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
RESET1_Release_OK	Bool	false	Non-retain	True	True	True	False		
RESET1_Q	Bool	false	Non-retain	True	True	True	False		
### END RESET1 ###	Bool	false	Non-retain	True	True	True	False		
### OVERRIDE ###	Bool	false	Non-retain	True	True	True	False		
▼ OVR_TON_Timer_1	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
OVR_Override_required	Bool	false	Non-retain	True	True	True	False		
OVR_Override_status	Bool	false	Non-retain	True	True	True	False		
OVR_Overriede_Clearance	Bool	false	Non-retain	True	True	True	False		
### END OVERRIDE ###	Bool	false	Non-retain	True	True	True	False		
### RESET2 ###	Bool	false	Non-retain	True	True	True	False		
RESET2_Edge_neg_1	Bool	false	Non-retain	True	True	True	False		
RESET2_M_Reset	Bool	false	Non-retain	True	True	True	False		
▼ RESET2_TON_TIMER_1	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ RESET2_TON_TIMER_2	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
RESET2_Release_OK	Bool	false	Non-retain	True	True	True	False		
### END RESET2 ###	Bool	false	Non-retain	True	True	True	False		
### TERMINATION ###	Bool	false	Non-retain	True	True	True	False		
TERM_Edge_neg_1	Bool	false	Non-retain	True	True	True	False		
TERM_Edge_pos_1	Bool	false	Non-retain	True	True	True	False		
TERM_HM_1	Bool	false	Non-retain	True	True	True	False		
▼ TERM_TOF_Timer_1	TOF			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
### END TERMINATION ###	Bool	false	Non-retain	True	True	True	False		
### MIN_MAX_TIMER_RESET ###	Bool	false	Non-retain	True	True	True	False		
▼ MIN_MAX_TIME_TON_Timer_Reset	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
### END_MIN_MAX_TIMER_RESET ###	Bool	false	Non-retain	True	True	True	False		
###MIN TIME ###	Bool	false	Non-retain	True	True	True	False		
MIN_TIME_1_Timer_save	Time	T#0ms	Non-retain	True	True	True	False		
MIN_TIME_1_Timer_1st_stop	Bool	FALSE	Non-retain	True	True	True	False		
MIN_TIME_1_Edge_neg_1	Bool	false	Non-retain	True	True	True	False		
▼ MIN_TIME_1_TON_Timer_1	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
MIN_TIME_1_Q	Bool	false	Non-retain	True	True	True	False		
MIN_TIME_2_Timer_save	Time	T#0ms	Non-retain	True	True	True	False		
MIN_TIME_2_Timer_1st_stop	Bool	FALSE	Non-retain	True	True	True	False		
MIN_TIME_2_Edge_neg	Bool	false	Non-retain	True	True	True	False		
▼ MIN_TIME_2_TON_Timer	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
MIN_TIME_2_Q	Bool	false	Non-retain	True	True	True	False		
MIN_TIME_3_Timer_save	Time	T#0ms	Non-retain	True	True	True	False		
MIN_TIME_3_Timer_1st_stop	Bool	false	Non-retain	True	True	True	False		
MIN_TIME_3_Edge_neg	Bool	false	Non-retain	True	True	True	False		
MIN_TIME_3_TON_Timer	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
MIN_TIME_3_Q	Bool	false	Non-retain	True	True	True	False		
MIN_TIME_4_Timer_save	Time	T#0ms	Non-retain	True	True	True	False		
MIN_TIME_4_Timer_1st_stop	Bool	false	Non-retain	True	True	True	False		
MIN_TIME_4_Edge_neg	Bool	false	Non-retain	True	True	True	False		
MIN_TIME_4_TON_Timer	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
MIN_TIME_4_Q	Bool	false	Non-retain	True	True	True	False		
###END MIN TIME ###	Bool	false	Non-retain	True	True	True	False		
###MAX TIME ###	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_1_Timer_save	Time	T#0ms	Non-retain	True	True	True	False		
MAX_TIME_1_Timer_1st_stop	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_1_Edge_neg	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_1_TON_Timer	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
MAX_TIME_1_Q	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_2_Timer_save	Time	T#0ms	Non-retain	True	True	True	False		
MAX_TIME_2_Timer_1st_stop	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_2_Edge_neg	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_2_TON_Timer	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
MAX_TIME_2_Q	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_3_Timer_save	Time	T#0ms	Non-retain	True	True	True	False		
MAX_TIME_3_Timer_1st_stop	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_3_Edge_neg	Bool	false	Non-retain	True	True	True	False		
▼ MAX_TIME_3_TON_Timer	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
MAX_TIME_3_Q	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_4_Timer_save	Time	T#0ms	Non-retain	True	True	True	False		
MAX_TIME_4_Timer_1st_stop	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_4_Edge_neg	Bool	false	Non-retain	True	True	True	False		
▼ MAX_TIME_4_TON_Timer	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
MAX_TIME_4_Q	Bool	false	Non-retain	True	True	True	False		
###END MAX TIME ###	Bool	false	Non-retain	True	True	True	False		
### DISC CONTROL 1 ###	Bool	false	Non-retain	True	True	True	False		
DISC_1_b_Input_A	Bool	false	Non-retain	True	True	True	False		
DISC_1_b_Input_B	Bool	false	Non-retain	True	True	True	False		
DISC_1_Fl_pos_1	Bool	false	Non-retain	True	True	True	False		
DISC_1_Fl_neg_1	Bool	false	Non-retain	True	True	True	False		
DISC_1_Fl_neg_2	Bool	false	Non-retain	True	True	True	False		
DISC_1_Startbit	Bool	false	Non-retain	True	True	True	False		
DISC_1_Stopbit	Bool	false	Non-retain	True	True	True	False		
DISC_1_M_Release	Bool	false	Non-retain	True	True	True	False		
DISC_1_M_AND_Mode_active	Bool	false	Non-retain	True	True	True	False		
▼ DISC_1_TON_Timer_1	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ DISC_1_TON_Timer_2	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
DISC_1_TON_Timer_3	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
DISC_1_TOF_Timer_1	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
DISC_1_TOF_Timer_2	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
DISC_1_Q	Bool	false	Non-retain	True	True	True	False		
DISC_1_Error	Bool	false	Non-retain	True	True	True	False		
DISC_1_Error_Discrepancy_1	Bool	false	Non-retain	True	True	True	False		
DISC_1_Error_Discrepancy_2	Bool	false	Non-retain	True	True	True	False		
### END DISC CONTROL 1 ###	Bool	false	Non-retain	True	True	True	False		
### DISC CONTROL 2 ###	Bool	false	Non-retain	True	True	True	False		
DISC_2_b_Input_A	Bool	false	Non-retain	True	True	True	False		
DISC_2_b_Input_B	Bool	false	Non-retain	True	True	True	False		
DISC_2_Fl_pos_1	Bool	false	Non-retain	True	True	True	False		
DISC_2_Fl_neg_1	Bool	false	Non-retain	True	True	True	False		
DISC_2_Fl_neg_2	Bool	false	Non-retain	True	True	True	False		
DISC_2_Startbit	Bool	false	Non-retain	True	True	True	False		
DISC_2_Stopbit	Bool	false	Non-retain	True	True	True	False		
DISC_2_M_Release	Bool	false	Non-retain	True	True	True	False		
DISC_2_M_AND_Mode_active	Bool	false	Non-retain	True	True	True	False		
DISC_2_TON_Timer_1	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
DISC_2_TON_Timer_2	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ DISC_2_TON_Timer_3	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ DISC_2_TOF_Timer_1	TOF			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ DISC_2_TOF_Timer_2	TOF			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
DISC_2_Q	Bool	false	Non-retain	True	True	True	False		
DISC_2_Error	Bool	false	Non-retain	True	True	True	False		
DISC_2_Error_Discrepancy_2	Bool	false	Non-retain	True	True	True	False		
DISC_2_Error_Discrepancy_1	Bool	false	Non-retain	True	True	True	False		
### END DISC CONTROL 2 ###	Bool	false	Non-retain	True	True	True	False		
### PLC SIG MONITORING ###	Bool	false	Non-retain	True	True	True	False		
PLC_SIG_MON_Edge_pos_1	Bool	false	Non-retain	True	True	True	False		
PLC_SIG_MON_Edge_pos_1	Bool	false	Non-retain	True	True	True	False		
PLC_SIG_MON_Edge_neg_1	Bool	false	Non-retain	True	True	True	False		
PLC_SIG_MON_Edge_neg_2	Bool	false	Non-retain	True	True	True	False		
PLC_SIG_MON_HM_1	Bool	false	Non-retain	True	True	True	False		
PLC_SIG_MON_Int_muting_request	Bool	false	Non-retain	True	True	True	False		
PLC_SIG_MON_Int_time_extension	Bool	false	Non-retain	True	True	True	False		
PLC_SIG_MON_Discrepancy_control_Q	Bool	false	Non-retain	True	True	True	False		
PLC_SIG_MON_Error_discrepancy_control_1	Bool	false	Non-retain	True	True	True	False		
▼ PLC_SIG_MON_TON_Timer_1	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
### END PLC SIG MONITORING ###	Bool	false	Non-retain	True	True	True	False		
### SSE #####	Bool	false	Non-retain	True	True	True	False		
SSE_Int_Enable	Bool	false	Non-retain	True	True	True	False		
SSE_Int_Muting_active	Bool	false	Non-retain	True	True	True	False		
SSE_Int_Safe_condition	Bool	false	Non-retain	True	True	True	False		
### END SSE #####	Bool	false	Non-retain	True	True	True	False		
### SEQUENCE MONITORING ###	Bool	false	Non-retain	True	True	True	False		
SEQ_MON_TOF_Timer_1	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
SEQ_MON_TOF_Timer_2	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
SEQ_MON_TOF_Timer_3	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
SEQ_MON_TOF_Timer_4	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
SEQ_MON_TON_Timer_5	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
SEQ_MON_TON_Timer_6	TON			True	True	True	False		
Input									

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ SEQ_MON_TON_Timer_7	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ SEQ_MON_TON_Timer_8	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ SEQ_MON_TON_Timer_9	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ SEQ_MON_TON_Timer_10	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ SEQ_MON_TON_Timer_11	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ SEQ_MON_TON_Timer_12	TON			True	True	True	False		
▼ Input									

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
SEQ_MON_Edge_PLC_request	Bool	false	Non-retain	True	True	True	False		
SEQ_MON_Edge_pos_1	Bool	false	Non-retain	True	True	True	False		
SEQ_MON_Error_PLC_Req	Bool	false	Non-retain	True	True	True	False		
SEQ_MON_HM_PLC_request	Bool	false	Non-retain	True	True	True	False		
### END SEQUENCE MONITORING ###	Bool	false	Non-retain	True	True	True	False		
### ERROR HANDLING ###	Bool	false	Non-retain	True	True	True	False		
ERR_Handling_INT	Int	0	Non-retain	True	True	True	False		
ERR_Handling_Neg_Flag	Bool	false	Non-retain	True	True	True	False		
ERR_Signal_monitoring_MR_TE	Bool	false	Non-retain	True	True	True	False		
ERR_Signal_monitoring_MR_TE_direct	Bool	false	Non-retain	True	True	True	False		
HM_Sequenz_MR_TE_1	Bool	false	Non-retain	True	True	True	False		
HM_Sequenz_MR_TE_2	Bool	false	Non-retain	True	True	True	False		
HM_Sequenz_MR_TE_OK	Bool	false	Non-retain	True	True	True	False		
ERR_Flag_Pos	Bool	false	Non-retain	True	True	True	False		
ERR_FL_Neg	Bool	false	Non-retain	True	True	True	False		
▼ TON_Timer_Err_direct	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
Create Error Termination Sequence	Bool	false	Non-retain	True	True	True	False		
Create Error Min time	Bool	false	Non-retain	True	True	True	False		
Create Error Max time	Bool	false	Non-retain	True	True	True	False		
Create Error Timing selection	Bool	false	Non-retain	True	True	True	False		
Create Error PLC Signal	Bool	false	Non-retain	True	True	True	False		
Create Error TE Signal	Bool	false	Non-retain	True	True	True	False		
Create Error Discrepancy MR TE	Bool	false	Non-retain	True	True	True	False		
Create Error Discrepancy ESPE	Bool	false	Non-retain	True	True	True	False		
Create Error calculation zero	Bool	false	Non-retain	True	True	True	False		
Create Error Signal monitoring MR TE	Bool	false	Non-retain	True	True	True	False		
Create Error Max. Dist ESPE	Bool	false	Non-retain	True	True	True	False		
Create Error Monitoring Max. Muting	Bool	false	Non-retain	True	True	True	False		
Create Error Max. INIT Time	Bool	false	Non-retain	True	True	True	False		
Create Error Initiation sequence	Bool	false	Non-retain	True	True	True	False		
Create Error min time less 500mm	Bool	false	Non-retain	True	True	True	False		
Reset_bit	Bool	false	Non-retain	True	True	True	False		
### END ERROR HANDLING ###	Bool	false	Non-retain	True	True	True	False		
Distance_Materia_To_LG	DInt	0	Non-retain	True	True	True	False		
▼ Mute_LG_2_DB	"SICK Safe Entry Exit HW PLC V02"			True	True	True	False		compiled for S7-1500F hardware controllers

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Input									
########## BASIC_INPUTS ##########	Bool	false	Non-retain	True	True	True	False		
I_S_ESPE_Channel_1	Bool	false	Non-retain	True	True	True	False		
I_S_ESPE_Channel_2	Bool	false	Non-retain	True	True	True	False		
I_S_PLC_request (MR)	Bool	false	Non-retain	True	True	True	False		
I_S_Time_extension (TE)	Bool	false	Non-retain	True	True	True	False		
I_S_Reset	Bool	false	Non-retain	True	True	True	False		
I_S_Override hold-to-run-device	Bool	false	Non-retain	True	True	True	False		
I_S_first_logic_cycle	Bool	false	Non-retain	True	True	True	False		
I_S_Disc_Time_MR_and_TE	Time	t#500ms	Non-retain	True	True	True	False		
########## MATERIAL_SELECTION_INPUTS ##########	Bool	false	Non-retain	True	True	True	False		
I_S_Material_selection_1	Bool	false	Non-retain	True	True	True	False		
I_S_Material_selection_2	Bool	false	Non-retain	True	True	True	False		
I_S_Material_selection_3	Bool	false	Non-retain	True	True	True	False		
I_S_Material_selection_4	Bool	false	Non-retain	True	True	True	False		
########## MATERIAL_TOLERANCE_LENGTH in mm ##########	Bool	false	Non-retain	True	True	True	False		
I_S_Material_tolerance_length_Material_1-4	DInt	100	Non-retain	True	True	True	False		
########## MAX_DISTANCE_MATERIAL_ESPE in mm ##########	Bool	false	Non-retain	True	True	True	False		
I_S_Max_distance_Material_to_ESPE	DInt	0	Non-retain	True	True	True	False		
########## MATERIAL_LENGH_1-4 in mm ##########	Bool	false	Non-retain	True	True	True	False		
I_S_Material_length_Material_1	DInt	0	Non-retain	True	True	True	False		
I_S_Material_length_Material_2	DInt	0	Non-retain	True	True	True	False		
I_S_Material_length_Material_3	DInt	0	Non-retain	True	True	True	False		
I_S_Material_length_Material_4	DInt	0	Non-retain	True	True	True	False		
########## MATERIAL_SPEED_1-4 in mm/s ##########	Bool	false	Non-retain	True	True	True	False		
I_S_Material_speed_Material_1	DInt	0	Non-retain	True	True	True	False		
I_S_Material_speed_Material_2	DInt	0	Non-retain	True	True	True	False		
I_S_Material_speed_Material_3	DInt	0	Non-retain	True	True	True	False		
I_S_Material_speed_Material_4	DInt	0	Non-retain	True	True	True	False		
▼ Output									
########## BASIC_OUTPUTS ##########	Bool	false	Non-retain	True	True	True	False		
Q_Safety_release_1	Bool	false	Non-retain	True	True	True	False		
Q_Safety_release_2	Bool	false	Non-retain	True	True	True	False		
Q_SEE_Status	Bool	false	Non-retain	True	True	True	False		
Q_Override_Status	Bool	false	Non-retain	True	True	True	False		
Q_Reset_required	Bool	false	Non-retain	True	True	True	False		
Q_Sequence_OK	Bool	false	Non-retain	True	True	True	False		
########## ERRORS ##########	Bool	false	Non-retain	True	True	True	False		
Error	Word	0	Non-retain	True	True	True	False		
InOut									
▼ Static									
## BASIC SIGNALS ##	Bool	false	Non-retain	True	True	True	False		
ESPE	Bool	false	Non-retain	True	True	True	False		
SEE_active	Bool	false	Non-retain	True	True	True	False		
SEE_inactive	Bool	false	Non-retain	True	True	True	False		
PLC_request	Bool	false	Non-retain	True	True	True	False		

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Time_extension	Bool	false	Non-retain	True	True	True	False		
PLC_request_end	Bool	false	Non-retain	True	True	True	False		
TE_signal_error	Bool	false	Non-retain	True	True	True	False		
PLC_error	Bool	false	Non-retain	True	True	True	False		
Timing_selection_error	Bool	false	Non-retain	True	True	True	False		
Initiation_Error	Bool	false	Non-retain	True	True	True	False		
SSE_aditional_release	Bool	false	Non-retain	True	True	True	False		
Initiation	Bool	false	Non-retain	True	True	True	False		
Termination	Bool	false	Non-retain	True	True	True	False		
Termination_Seq_good	Bool	false	Non-retain	True	True	True	False		
Override_status	Bool	false	Non-retain	True	True	True	False		
Sequence_Signals_good	Bool	false	Non-retain	True	True	True	False		
Material_1	Bool	false	Non-retain	True	True	True	False		
Material_2	Bool	false	Non-retain	True	True	True	False		
Material_3	Bool	false	Non-retain	True	True	True	False		
Material_4	Bool	false	Non-retain	True	True	True	False		
Min_time_good	Bool	false	Non-retain	True	True	True	False		
Max_time_Error	Bool	false	Non-retain	True	True	True	False		
▼ TON_Tact_Lamps	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ TOF_Tact_Lamps	TOF			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
Neg_Flag_Lamps	Bool	false	Non-retain	True	True	True	False		
Blinking_tact	Bool	false	Non-retain	True	True	True	False		
Always_0	Bool	FALSE	Non-retain	True	True	True	False		
Always_1	Bool	TRUE	Non-retain	True	True	True	False		
b_Sequence_Start	Bool	false	Non-retain	True	True	True	False		
b_Sequence_OK	Bool	false	Non-retain	True	True	True	False		
▼ Sequence_OK	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
## END BASIC SIGNALS ##	Bool	false	Non-retain	True	True	True	False		
### CLOCK GENERATOR ###	Bool	false	Non-retain	True	True	True	False		
CLK_GEN_Edge_neg_1	Bool	false	Non-retain	True	True	True	False		
▼ CLK_GEN_TON_Timer_1	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
InOut									
Static									
CLK_GEN_TOF_Timer_1	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
CLK_GEN_Tact	Bool	false	Non-retain	True	True	True	False		
### END CLOCK GENERATOR ###	Bool	false	Non-retain	True	True	True	False		
### INITIATION ###	Bool	false	Non-retain	True	True	True	False		
INIT_HM_1	Bool	false	Non-retain	True	True	True	False		
INIT_HM_2	Bool	false	Non-retain	True	True	True	False		
INIT_HM_3	Bool	false	Non-retain	True	True	True	False		
INIT_Edge_neg_1	Bool	false	Non-retain	True	True	True	False		
### END INITIATION ###	Bool	false	Non-retain	True	True	True	False		
### MIN MAX TIME MONITORING ###	Bool	false	Non-retain	True	True	True	False		
MM_TIME_MONT_Fl_neg_1	Bool	false	Non-retain	True	True	True	False		
MM_TIME_MONT_TOF_Timer_1	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
MM_TIME_MONT_Int_timer_reset	Bool	false	Non-retain	True	True	True	False		
MM_TIME_MONT_Counter_up_1	CTU			True	True	True	False		
Input									
CU	Bool	false	Non-retain	True	True	True	False		Count input
R	Bool	false	Non-retain	True	True	True	False		Reset input
PV	Int	0	Non-retain	True	True	True	False		Value at which the output Q is set
Output									
Q	Bool	false	Non-retain	True	True	True	False		Counter status
CV	Int	0	Non-retain	True	True	True	False		Actual count value
InOut									
Static									
MM_TIME_MONT_Counter_up_2	CTU			True	True	True	False		
Input									
CU	Bool	false	Non-retain	True	True	True	False		Count input
R	Bool	false	Non-retain	True	True	True	False		Reset input
PV	Int	0	Non-retain	True	True	True	False		Value at which the output Q is set
Output									
Q	Bool	false	Non-retain	True	True	True	False		Counter status
CV	Int	0	Non-retain	True	True	True	False		Actual count value
InOut									
Static									
MM_TIME_MONT_SEE_act_neg_edge	Bool	false	Non-retain	True	True	True	False		
MM_TIME_MONT_Timer_reset	Bool	false	Non-retain	True	True	True	False		
MM_TIME_MONT_TE_inactive	Bool	false	Non-retain	True	True	True	False		
MM_TIME_MONT_TE_Timeout	Bool	false	Non-retain	True	True	True	False		

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
MM_TIME_MONT_SEE_Timing_1	Bool	false	Non-retain	True	True	True	False		
MM_TIME_MONT_SEE_Timing_2	Bool	false	Non-retain	True	True	True	False		
MM_TIME_MONT_SEE_Timing_3	Bool	false	Non-retain	True	True	True	False		
MM_TIME_MONT_SEE_Timing_4	Bool	false	Non-retain	True	True	True	False		
### END MIN MAX TIME MONITORING ###	Bool	false	Non-retain	True	True	True	False		
### MULTIPLE STORE ###	Bool	false	Non-retain	True	True	True	False		
MUL_STORE_Edge_pos_1	Bool	false	Non-retain	True	True	True	False		
MUL_STORE_Save_Signal_1	Bool	false	Non-retain	True	True	True	False		
MUL_STORE_Save_Signal_2	Bool	false	Non-retain	True	True	True	False		
MUL_STORE_Save_Signal_3	Bool	false	Non-retain	True	True	True	False		
MUL_STORE_Save_Signal_4	Bool	false	Non-retain	True	True	True	False		
MUL_STORE_Save_Signal_5	Bool	false	Non-retain	True	True	True	False		
MUL_STORE_Save_Signal_6	Bool	false	Non-retain	True	True	True	False		
MUL_STORE_Save_Signal_7	Bool	false	Non-retain	True	True	True	False		
### END MULTIPLE STORE ###	Bool	false	Non-retain	True	True	True	False		
### OPERATION SELECTOR ###	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Input_change	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Last_Cycle_Out_1	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Last_Cycle_Out_2	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Last_Cycle_Out_3	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Last_Cycle_Out_4	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Last_Cycle_Out_5	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Last_Cycle_Out_6	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Last_Cycle_Out_7	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Last_Cycle_Out_8	Bool	false	Non-retain	True	True	True	False		
OP_SEL_HM_out_1	Bool	false	Non-retain	True	True	True	False		
OP_SEL_HM_out_2	Bool	false	Non-retain	True	True	True	False		
OP_SEL_HM_out_3	Bool	false	Non-retain	True	True	True	False		
OP_SEL_HM_out_4	Bool	false	Non-retain	True	True	True	False		
OP_SEL_HM_out_5	Bool	false	Non-retain	True	True	True	False		
OP_SEL_HM_out_6	Bool	false	Non-retain	True	True	True	False		
OP_SEL_HM_out_7	Bool	false	Non-retain	True	True	True	False		
OP_SEL_HM_out_8	Bool	false	Non-retain	True	True	True	False		
OP_SEL_TON_Timer_1	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
OP_SEL_TON_Timer_2	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
OP_SEL_Timing_1	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Timing_2	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Timing_3	Bool	false	Non-retain	True	True	True	False		
OP_SEL_Timing_4	Bool	false	Non-retain	True	True	True	False		
### END OPERATION SELECTOR ###	Bool	false	Non-retain	True	True	True	False		
### RESET1 ###	Bool	false	Non-retain	True	True	True	False		
RESET1_Edge_neg_1	Bool	false	Non-retain	True	True	True	False		
RESET1_M_Reset	Bool	false	Non-retain	True	True	True	False		
RESET1_TON_TIMER_1	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
RESET1_TON_TIMER_2	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
RESET1_Release_OK	Bool	false	Non-retain	True	True	True	False		
RESET1_Q	Bool	false	Non-retain	True	True	True	False		
### END RESET1 ###	Bool	false	Non-retain	True	True	True	False		
### OVERRIDE ###	Bool	false	Non-retain	True	True	True	False		
OVR_TON_Timer_1	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
OVR_Override_required	Bool	false	Non-retain	True	True	True	False		
OVR_Override_status	Bool	false	Non-retain	True	True	True	False		
OVR_Overriede_Clearance	Bool	false	Non-retain	True	True	True	False		
### END OVERRIDE ###	Bool	false	Non-retain	True	True	True	False		
### RESET2 ###	Bool	false	Non-retain	True	True	True	False		
RESET2_Edge_neg_1	Bool	false	Non-retain	True	True	True	False		
RESET2_M_Reset	Bool	false	Non-retain	True	True	True	False		
RESET2_TON_TIMER_1	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
RESET2_TON_TIMER_2	TON			True	True	True	False		

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
RESET2_Release_OK	Bool	false	Non-retain	True	True	True	False		
### END RESET2 ###	Bool	false	Non-retain	True	True	True	False		
### TERMINATION ###	Bool	false	Non-retain	True	True	True	False		
TERM_Edge_neg_1	Bool	false	Non-retain	True	True	True	False		
TERM_Edge_pos_1	Bool	false	Non-retain	True	True	True	False		
TERM_HM_1	Bool	false	Non-retain	True	True	True	False		
▼ TERM_TOF_Timer_1	TOF			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
### END TERMINATION ###	Bool	false	Non-retain	True	True	True	False		
### MIN_MAX_TIMER_RESET ###	Bool	false	Non-retain	True	True	True	False		
▼ MIN_MAX_TIME_TON_Timer_Reset	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
### END_MIN_MAX_TIMER_RESET ###	Bool	false	Non-retain	True	True	True	False		
###MIN TIME ###	Bool	false	Non-retain	True	True	True	False		
MIN_TIME_1_Timer_save	Time	T#0ms	Non-retain	True	True	True	False		
MIN_TIME_1_Timer_1st_stop	Bool	FALSE	Non-retain	True	True	True	False		
MIN_TIME_1_Edge_neg_1	Bool	false	Non-retain	True	True	True	False		
▼ MIN_TIME_1_TON_Timer_1	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
MIN_TIME_1_Q	Bool	false	Non-retain	True	True	True	False		
MIN_TIME_2_Timer_save	Time	T#0ms	Non-retain	True	True	True	False		
MIN_TIME_2_Timer_1st_stop	Bool	FALSE	Non-retain	True	True	True	False		
MIN_TIME_2_Edge_neg	Bool	false	Non-retain	True	True	True	False		
▼ MIN_TIME_2_TON_Timer	TON			True	True	True	False		

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
MIN_TIME_2_Q	Bool	false	Non-retain	True	True	True	False		
MIN_TIME_3_Timer_save	Time	T#0ms	Non-retain	True	True	True	False		
MIN_TIME_3_Timer_1st_stop	Bool	false	Non-retain	True	True	True	False		
MIN_TIME_3_Edge_neg	Bool	false	Non-retain	True	True	True	False		
MIN_TIME_3_TON_Timer	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
MIN_TIME_3_Q	Bool	false	Non-retain	True	True	True	False		
MIN_TIME_4_Timer_save	Time	T#0ms	Non-retain	True	True	True	False		
MIN_TIME_4_Timer_1st_stop	Bool	false	Non-retain	True	True	True	False		
MIN_TIME_4_Edge_neg	Bool	false	Non-retain	True	True	True	False		
MIN_TIME_4_TON_Timer	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
MIN_TIME_4_Q	Bool	false	Non-retain	True	True	True	False		
###END MIN TIME ###	Bool	false	Non-retain	True	True	True	False		
###MAX TIME ###	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_1_Timer_save	Time	T#0ms	Non-retain	True	True	True	False		
MAX_TIME_1_Timer_1st_stop	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_1_Edge_neg	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_1_TON_Timer	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
MAX_TIME_1_Q	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_2_Timer_save	Time	T#0ms	Non-retain	True	True	True	False		
MAX_TIME_2_Timer_1st_stop	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_2_Edge_neg	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_2_TON_Timer	TON			True	True	True	False		

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
MAX_TIME_2_Q	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_3_Timer_save	Time	T#0ms	Non-retain	True	True	True	False		
MAX_TIME_3_Timer_1st_stop	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_3_Edge_neg	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_3_TON_Timer	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
MAX_TIME_3_Q	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_4_Timer_save	Time	T#0ms	Non-retain	True	True	True	False		
MAX_TIME_4_Timer_1st_stop	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_4_Edge_neg	Bool	false	Non-retain	True	True	True	False		
MAX_TIME_4_TON_Timer	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
MAX_TIME_4_Q	Bool	false	Non-retain	True	True	True	False		
###END MAX TIME ###	Bool	false	Non-retain	True	True	True	False		
### DISC CONTROL 1 ###	Bool	false	Non-retain	True	True	True	False		
DISC_1_b_Input_A	Bool	false	Non-retain	True	True	True	False		
DISC_1_b_Input_B	Bool	false	Non-retain	True	True	True	False		
DISC_1_Fl_pos_1	Bool	false	Non-retain	True	True	True	False		
DISC_1_Fl_neg_1	Bool	false	Non-retain	True	True	True	False		
DISC_1_Fl_neg_2	Bool	false	Non-retain	True	True	True	False		
DISC_1_Startbit	Bool	false	Non-retain	True	True	True	False		
DISC_1_Stopbit	Bool	false	Non-retain	True	True	True	False		
DISC_1_M_Release	Bool	false	Non-retain	True	True	True	False		
DISC_1_M_AND_Mode_active	Bool	false	Non-retain	True	True	True	False		
DISC_1_TON_Timer_1	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
DISC_1_TON_Timer_2	TON			True	True	True	False		

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
DISC_1_TON_Timer_3	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
DISC_1_TOF_Timer_1	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
DISC_1_TOF_Timer_2	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
DISC_1_Q	Bool	false	Non-retain	True	True	True	False		
DISC_1_Error	Bool	false	Non-retain	True	True	True	False		
DISC_1_Error_Discrepancy_1	Bool	false	Non-retain	True	True	True	False		
DISC_1_Error_Discrepancy_2	Bool	false	Non-retain	True	True	True	False		
### END DISC CONTROL 1 ###	Bool	false	Non-retain	True	True	True	False		
### DISC CONTROL 2 ###	Bool	false	Non-retain	True	True	True	False		
DISC_2_b_Input_A	Bool	false	Non-retain	True	True	True	False		
DISC_2_b_Input_B	Bool	false	Non-retain	True	True	True	False		
DISC_2_Fl_pos_1	Bool	false	Non-retain	True	True	True	False		
DISC_2_Fl_neg_1	Bool	false	Non-retain	True	True	True	False		
DISC_2_Fl_neg_2	Bool	false	Non-retain	True	True	True	False		
DISC_2_Startbit	Bool	false	Non-retain	True	True	True	False		
DISC_2_Stopbit	Bool	false	Non-retain	True	True	True	False		
DISC_2_M_Release	Bool	false	Non-retain	True	True	True	False		
DISC_2_M_AND_Mode_active	Bool	false	Non-retain	True	True	True	False		
DISC_2_TON_Timer_1	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ DISC_2_TON_Timer_2	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ DISC_2_TON_Timer_3	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ DISC_2_TOF_Timer_1	TOF			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ DISC_2_TOF_Timer_2	TOF			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
DISC_2_Q	Bool	false	Non-retain	True	True	True	False		
DISC_2_Error	Bool	false	Non-retain	True	True	True	False		
DISC_2_Error_Discrepancy_2	Bool	false	Non-retain	True	True	True	False		
DISC_2_Error_Discrepancy_1	Bool	false	Non-retain	True	True	True	False		
### END DISC CONTROL 2 ###	Bool	false	Non-retain	True	True	True	False		
### PLC SIG MONITORING ###	Bool	false	Non-retain	True	True	True	False		
PLC_SIG_MON_Edge_pos_1	Bool	false	Non-retain	True	True	True	False		
PLC_SIG_MON_Edge_neg_1	Bool	false	Non-retain	True	True	True	False		
PLC_SIG_MON_Edge_neg_2	Bool	false	Non-retain	True	True	True	False		
PLC_SIG_MON_HM_1	Bool	false	Non-retain	True	True	True	False		
PLC_SIG_MON_Int_muting_request	Bool	false	Non-retain	True	True	True	False		
PLC_SIG_MON_Int_time_extension	Bool	false	Non-retain	True	True	True	False		
PLC_SIG_MON_Discrepancy_control_Q	Bool	false	Non-retain	True	True	True	False		

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
PLC_SIG_MON_Error_discrepancy_control_1	Bool	false	Non-retain	True	True	True	False		
PLC_SIG_MON_TON_Timer_1	TON			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
### END PLC SIG MONITORING ###	Bool	false	Non-retain	True	True	True	False		
### SSE #####	Bool	false	Non-retain	True	True	True	False		
SSE_Int_Enable	Bool	false	Non-retain	True	True	True	False		
SSE_Int_Muting_active	Bool	false	Non-retain	True	True	True	False		
SSE_Int_Safe_condition	Bool	false	Non-retain	True	True	True	False		
### END SSE #####	Bool	false	Non-retain	True	True	True	False		
### SEQUENCE MONITORING ###	Bool	false	Non-retain	True	True	True	False		
SEQ_MON_TOF_Timer_1	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
SEQ_MON_TOF_Timer_2	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
SEQ_MON_TOF_Timer_3	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
SEQ_MON_TOF_Timer_4	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
SEQ_MON_TON_Timer_5	TON			True	True	True	False		
Input									

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ SEQ_MON_TON_Timer_6	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ SEQ_MON_TON_Timer_7	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ SEQ_MON_TON_Timer_8	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ SEQ_MON_TON_Timer_9	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ SEQ_MON_TON_Timer_10	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ SEQ_MON_TON_Timer_11	TON			True	True	True	False		
▼ Input									


Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ SEQ_MON_TON_Timer_12	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
SEQ_MON_Edge_PLC_request	Bool	false	Non-retain	True	True	True	False		
SEQ_MON_Edge_pos_1	Bool	false	Non-retain	True	True	True	False		
SEQ_MON_Error_PLC_Req	Bool	false	Non-retain	True	True	True	False		
SEQ_MON_HM_PLC_request	Bool	false	Non-retain	True	True	True	False		
### END SEQUENCE MONITORING ###	Bool	false	Non-retain	True	True	True	False		
### ERROR HANDLING ###	Bool	false	Non-retain	True	True	True	False		
ERR_Handling_INT	Int	0	Non-retain	True	True	True	False		
ERR_Handling_Neg_Flag	Bool	false	Non-retain	True	True	True	False		
ERR_Signal_monitoring_MR_TE	Bool	false	Non-retain	True	True	True	False		
ERR_Signal_monitoring_MR_TE_direct	Bool	false	Non-retain	True	True	True	False		
HM_Sequenz_MR_TE_1	Bool	false	Non-retain	True	True	True	False		
HM_Sequenz_MR_TE_2	Bool	false	Non-retain	True	True	True	False		
HM_Sequenz_MR_TE_OK	Bool	false	Non-retain	True	True	True	False		
ERR_Flag_Pos	Bool	false	Non-retain	True	True	True	False		
ERR_FL_Neg	Bool	false	Non-retain	True	True	True	False		
▼ TON_Timer_Err_direct	TON			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the on-delay, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is set after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
Create Error Termination Sequence	Bool	false	Non-retain	True	True	True	False		
Create Error Min time	Bool	false	Non-retain	True	True	True	False		
Create Error Max time	Bool	false	Non-retain	True	True	True	False		
Create Error Timing selection	Bool	false	Non-retain	True	True	True	False		
Create Error PLC Signal	Bool	false	Non-retain	True	True	True	False		
Create Error TE Signal	Bool	false	Non-retain	True	True	True	False		
Create Error Discrepancy MR TE	Bool	false	Non-retain	True	True	True	False		
Create Error Discrepancy ESPE	Bool	false	Non-retain	True	True	True	False		
Create Error calculation zero	Bool	false	Non-retain	True	True	True	False		
Create Error Signal monitoring MR TE	Bool	false	Non-retain	True	True	True	False		
Create Error Max. Dist ESPE	Bool	false	Non-retain	True	True	True	False		
Create Error Monitoring Max. Muting	Bool	false	Non-retain	True	True	True	False		

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;


Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Create Error Max. INIT Time	Bool	false	Non-retain	True	True	True	False		
Create Error Initiation sequence	Bool	false	Non-retain	True	True	True	False		
Create Error min time less 500mm	Bool	false	Non-retain	True	True	True	False		
Reset_bit	Bool	false	Non-retain	True	True	True	False		
### END ERROR HANDLING ###	Bool	false	Non-retain	True	True	True	False		
F_T_Delay_Sae_OK	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
F_T_Delay_CL_4	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
F_T_Delay_CL_3	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
F_T_Delay_CL_2	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
F_T_Delay_CL_1	TOF			True	True	True	False		
Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the off-delay, must be positive
Output									
Q	Bool	false	Non-retain	True	True	True	False		Output that is reset after expiration of time PT
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
Chain_Slack_1_Filtered	Bool	false	Non-retain	False	False	False	False		
Chain_Slack_2_Filtered	Bool	false	Non-retain	False	False	False	False		
Chain_Slack_3_Filtered	Bool	false	Non-retain	False	False	False	False		
Chain_Slack_4_Filtered	Bool	false	Non-retain	False	False	False	False		
Light_Guard_Tuned	Bool	false	Non-retain	True	True	True	False		
Light_Guard_Tuned_Euro	Bool	false	Non-retain	True	True	True	False		
Light_Guard_Tuned_UK	Bool	false	Non-retain	True	True	True	False		

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Light_Guard_Tuned_UK_Infeed	Bool	false	Non-retain	True	True	True	False		
Light_Guard_Tuned_Euro_Infeed	Bool	false	Non-retain	True	True	True	False		
Light_Guard_Tuned_Infeed	Bool	false	Non-retain	True	True	True	False		
▼ F_Timer_Infeed_UK	TP			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the pulse, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Pulse output
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ F_Timer_Infeed_E	TP			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the pulse, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Pulse output
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ F_Timer_Outfeed_UK	TP			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the pulse, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Pulse output
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ F_Timer_Outfeed_E	TP			True	True	True	False		
▼ Input									
IN	Bool	false	Non-retain	True	True	True	False		Start input
PT	Time	T#0ms	Non-retain	True	True	True	False		Duration of the pulse, must be positive
▼ Output									
Q	Bool	false	Non-retain	True	True	True	False		Pulse output
ET	Time	T#0ms	Non-retain	True	True	True	False		Current time value
InOut									
Static									
▼ Temp									
EStop_Levels_OK	Bool								
Constant									


Network 1: RESET CABINET




Network 2: Overtravel lower limit

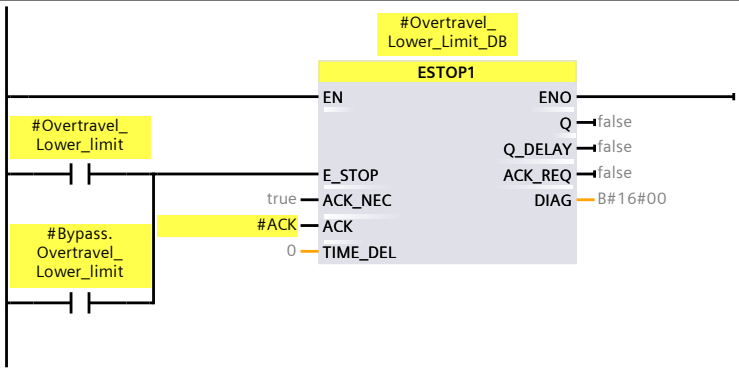


Network 3: Overtravel upper limit

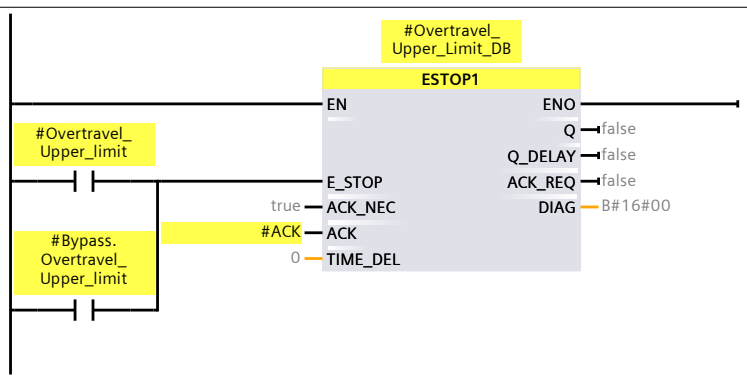


Network 4: Estop Main Panel

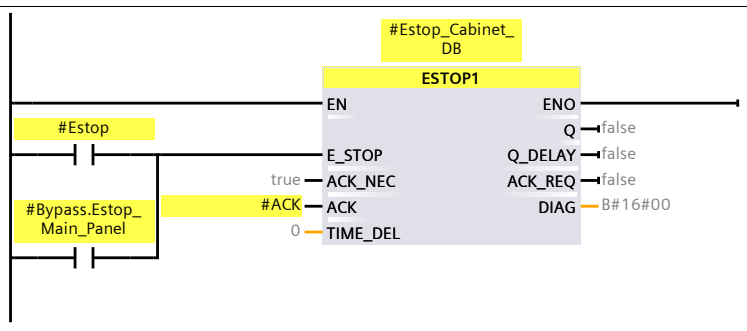


Network 5: Chain slack 1

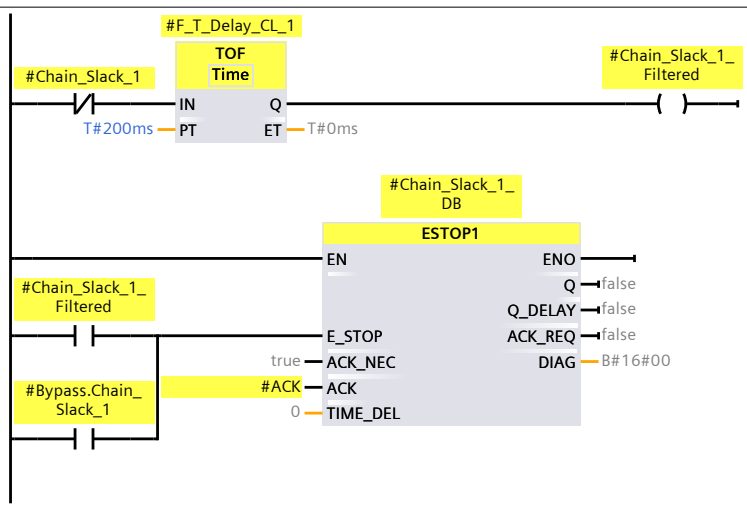


Network 6: Chain slack 2

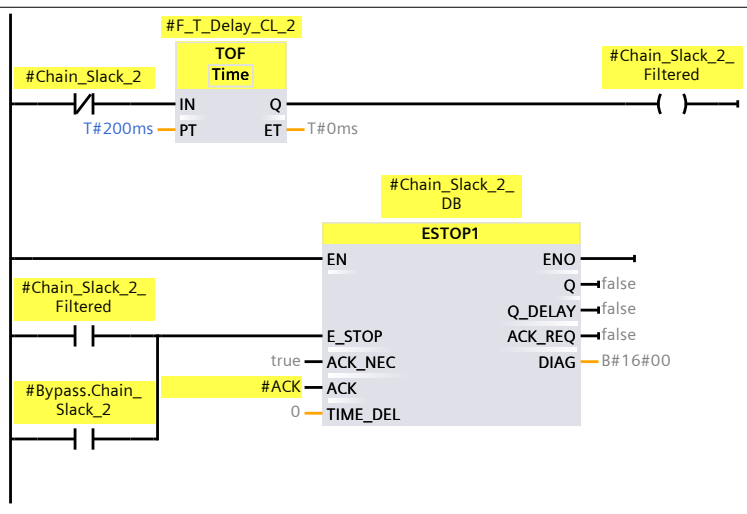


Network 7: Chain slack 3

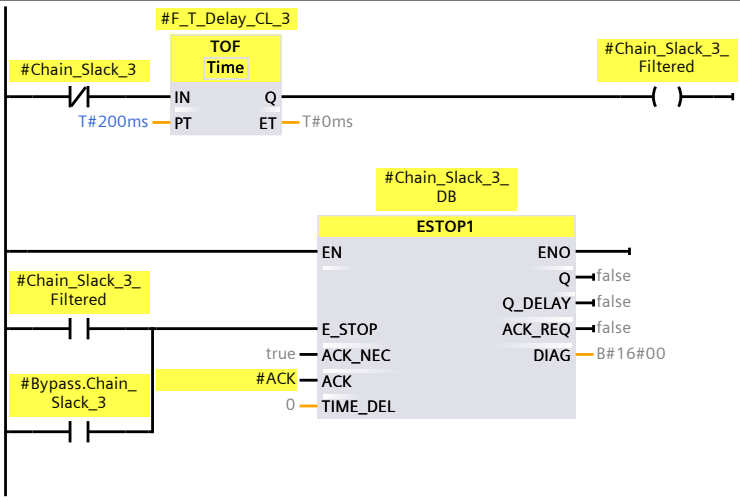


Network 8: Chain slack 4

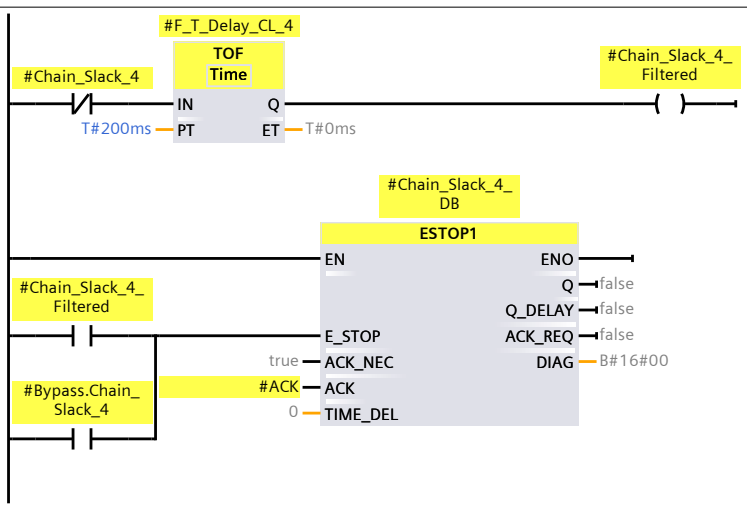


Network 9: Light Guard CX101

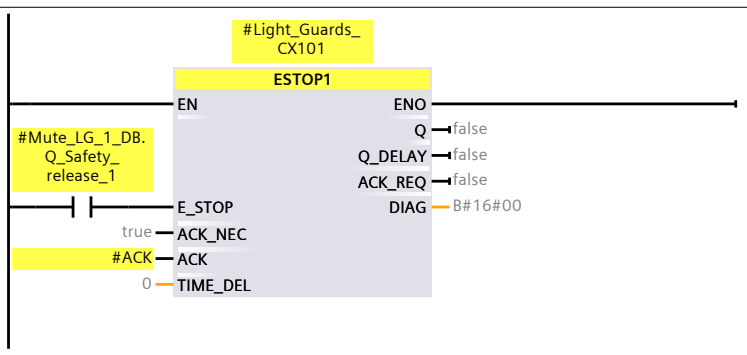


Network 10: Light Guard UK PALLETS - Infeed Conveyor

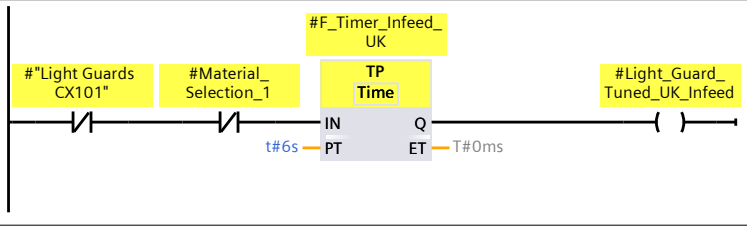


Network 11: Light Guard EURO PALLETS - Infeed Conveyor

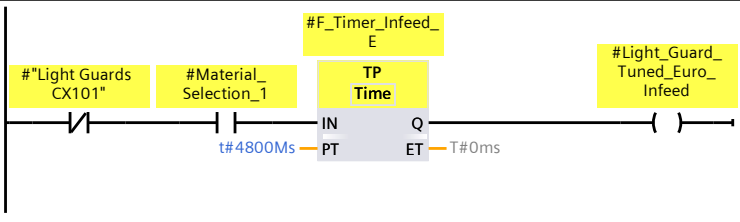


Network 12: Light Guard - OR - Infeed Conveyor - MUTE 1

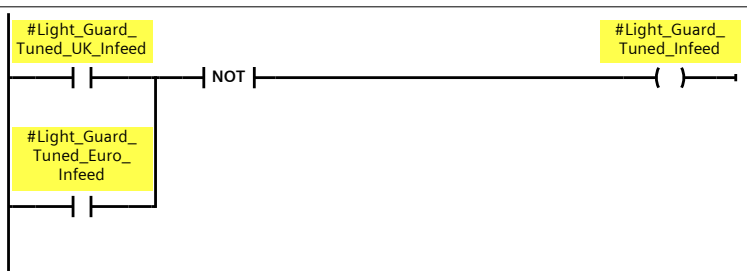


Network 13: MUTE 1

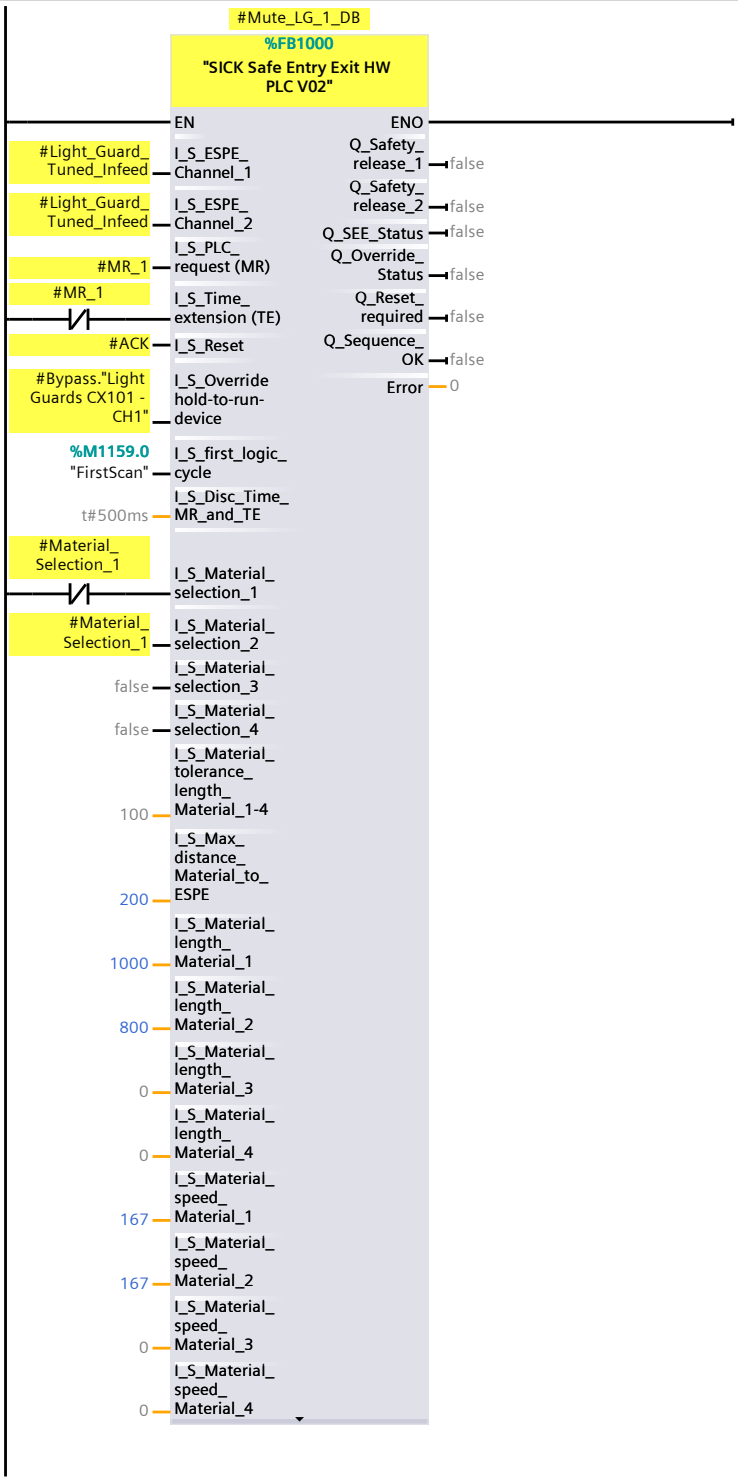


Network 14: Light Guard CX201

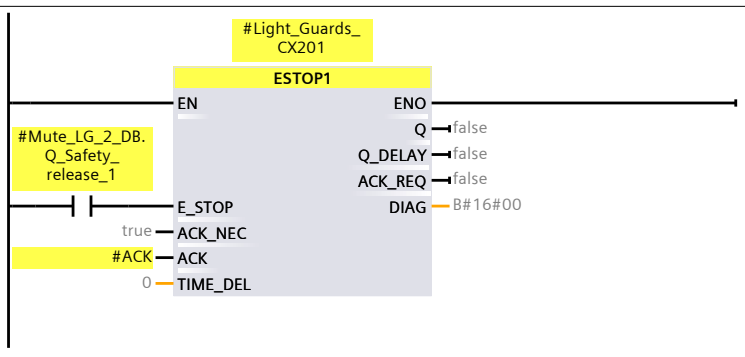


Network 15: Light Guard UK PALLETS - Outfeed Conveyor

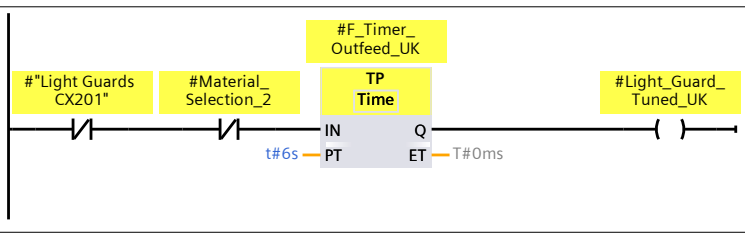

Network 16: Light Guard EURO PALLETS - Outfeed Conveyor

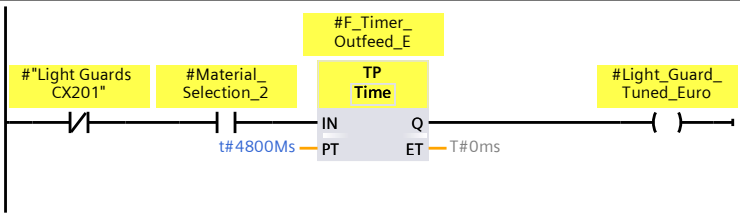


Network 17: Light Guard - OR - Infeed Conveyor - MUTE 2

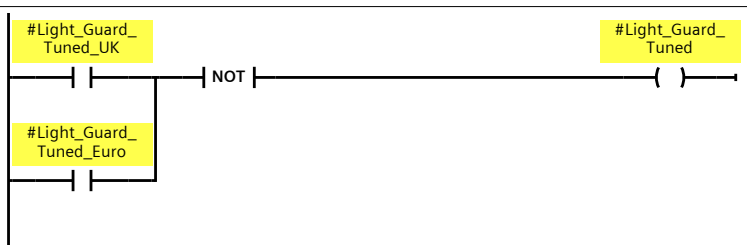


Network 18: MUTE 2


Network 19: Gate 1 Sensor

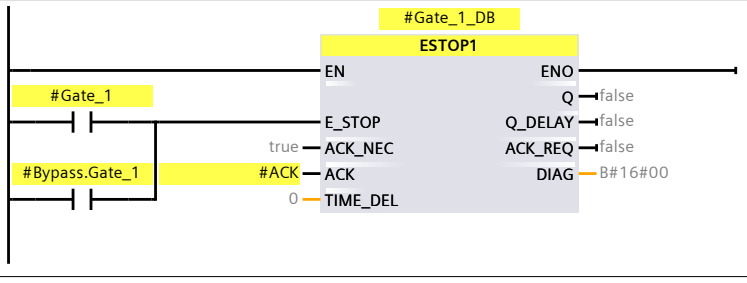


Network 20: Gate 2 Sensor

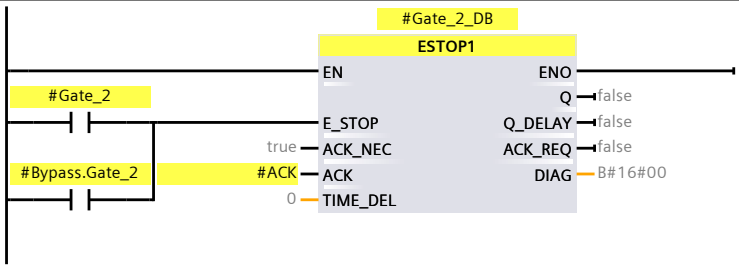


Network 21: Lock Secured 1

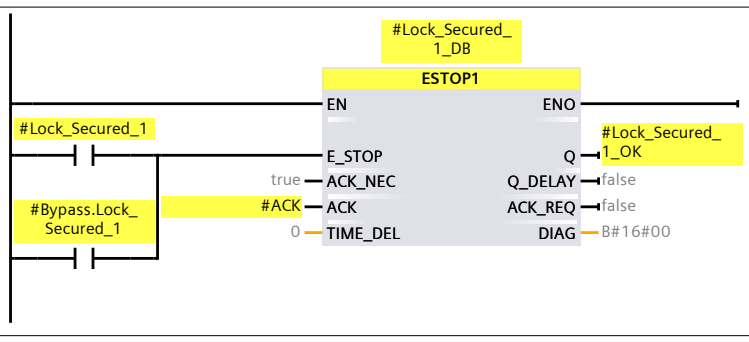


Network 22: Lock Secured 2

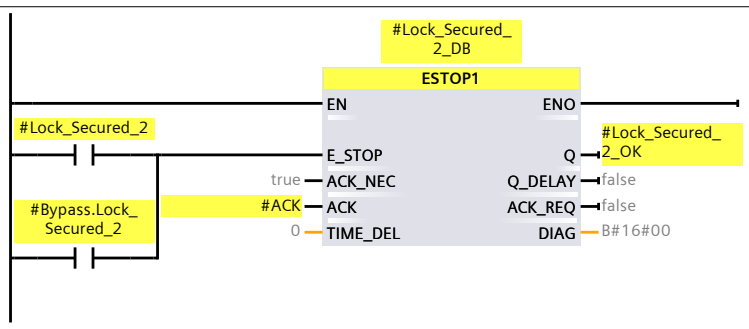


Network 23: Idem Lock EStop 1

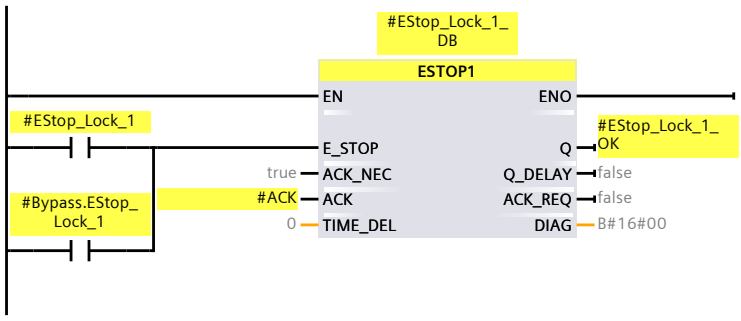


Network 24: Idem Lock EStop 2

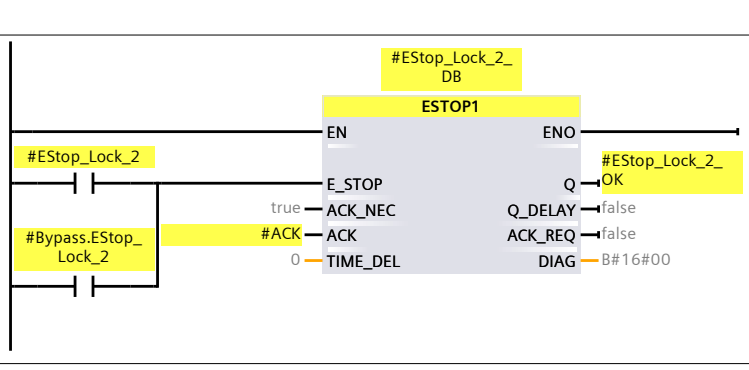


Network 25: ESTOP LEVEL 1

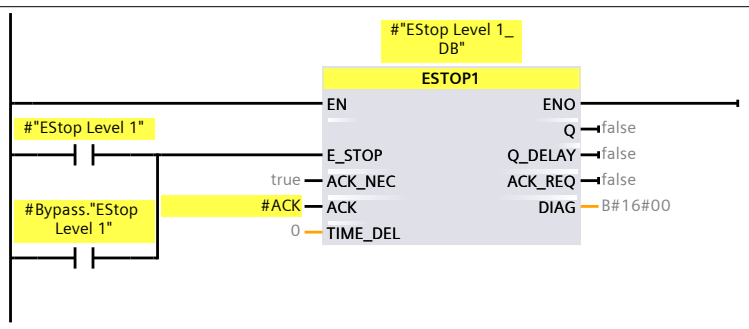


Network 26: ESTOP LEVEL 2

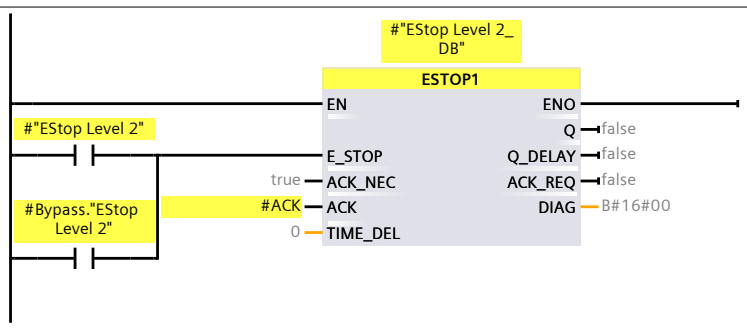


Network 27: ESTOP LEVEL 3

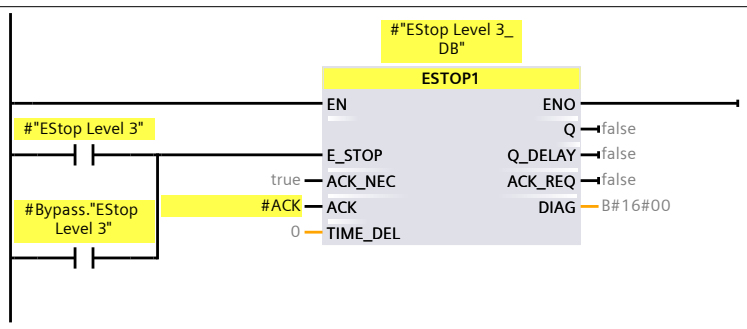


Network 28: ESTOP LEVEL 4

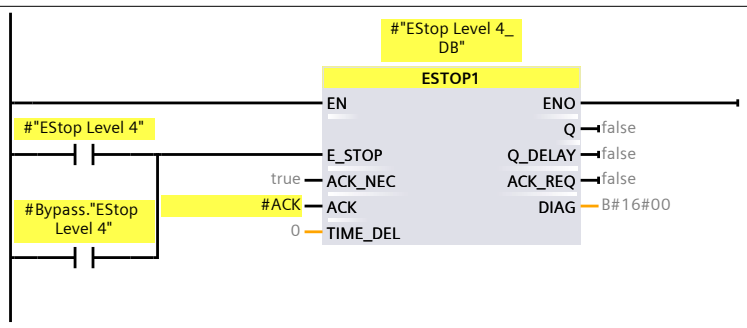


Network 29: ESTOP LEVEL 5

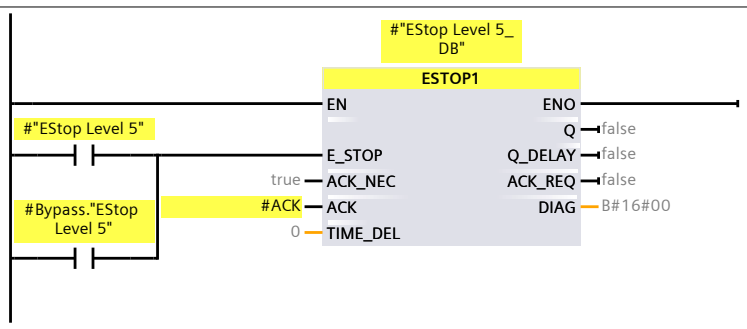


Network 30: ESTOP LEVEL 6

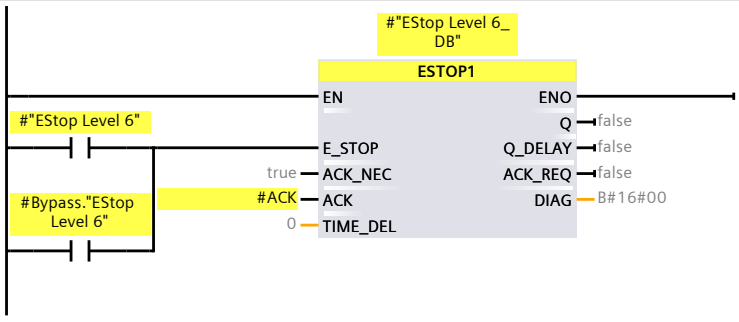


Network 31: ESTOP LEVEL 7

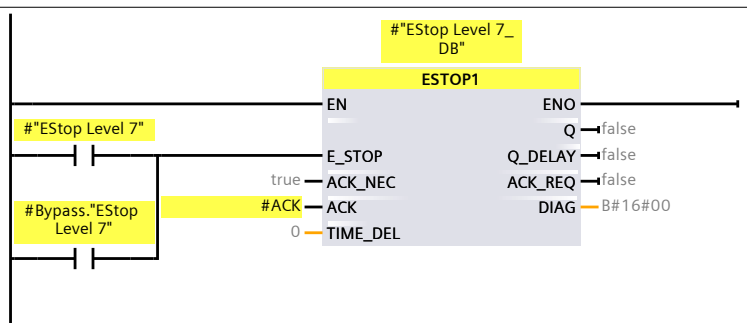


Network 32: ESTOP LEVEL 8

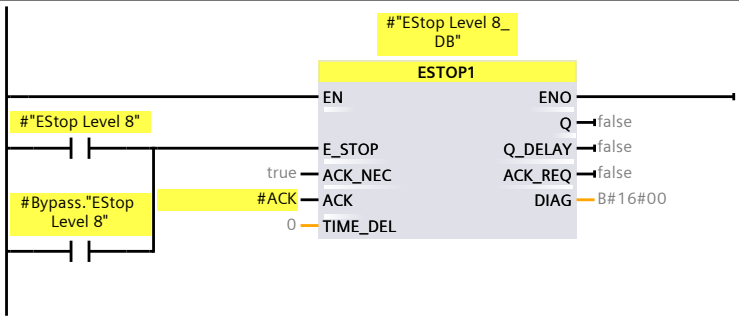


Network 33: STOP LEVEL

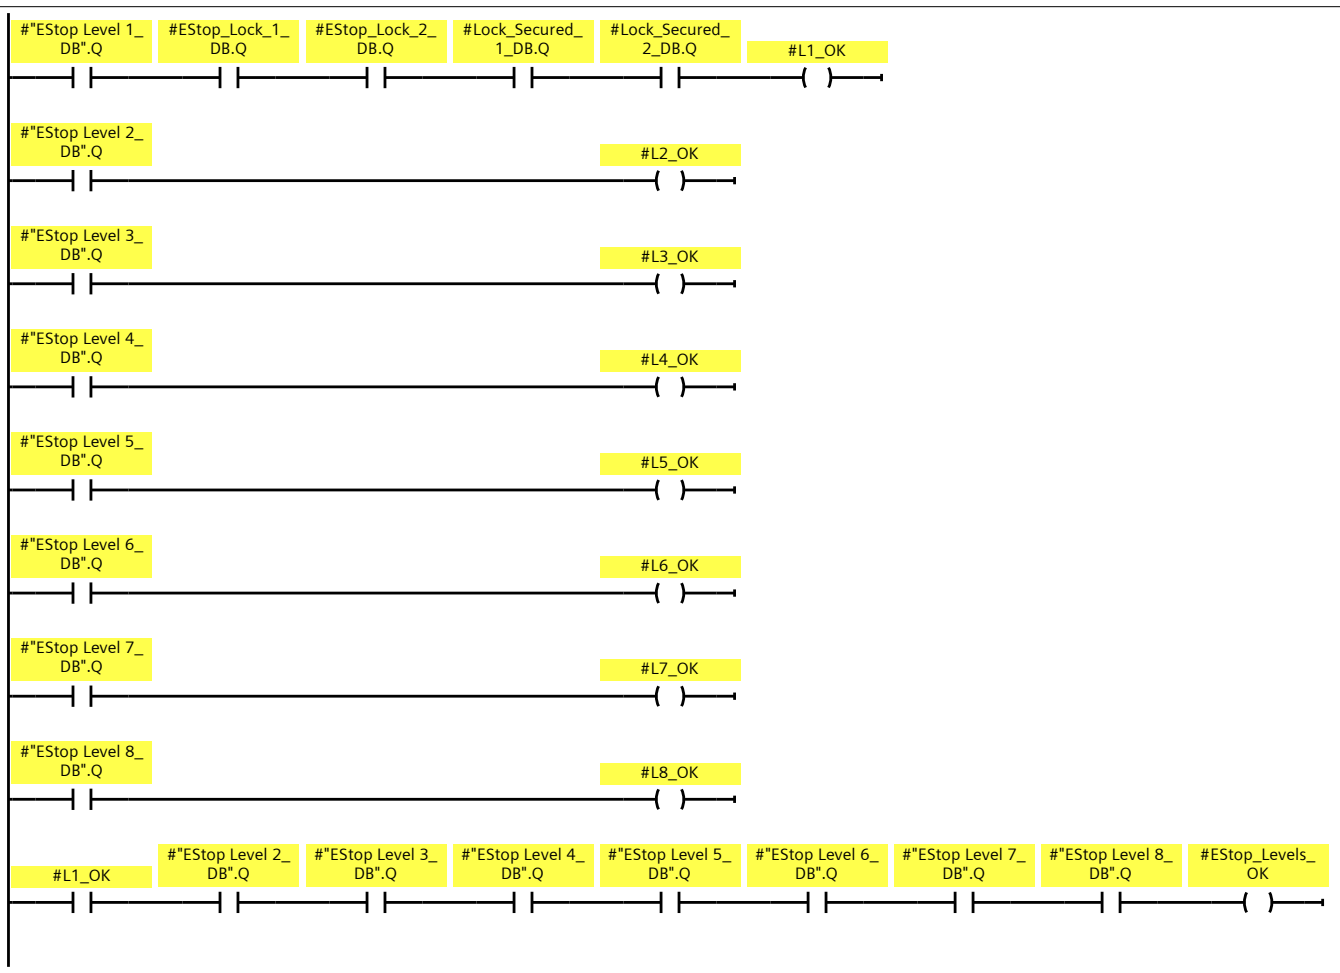


Network 34: Safety OK

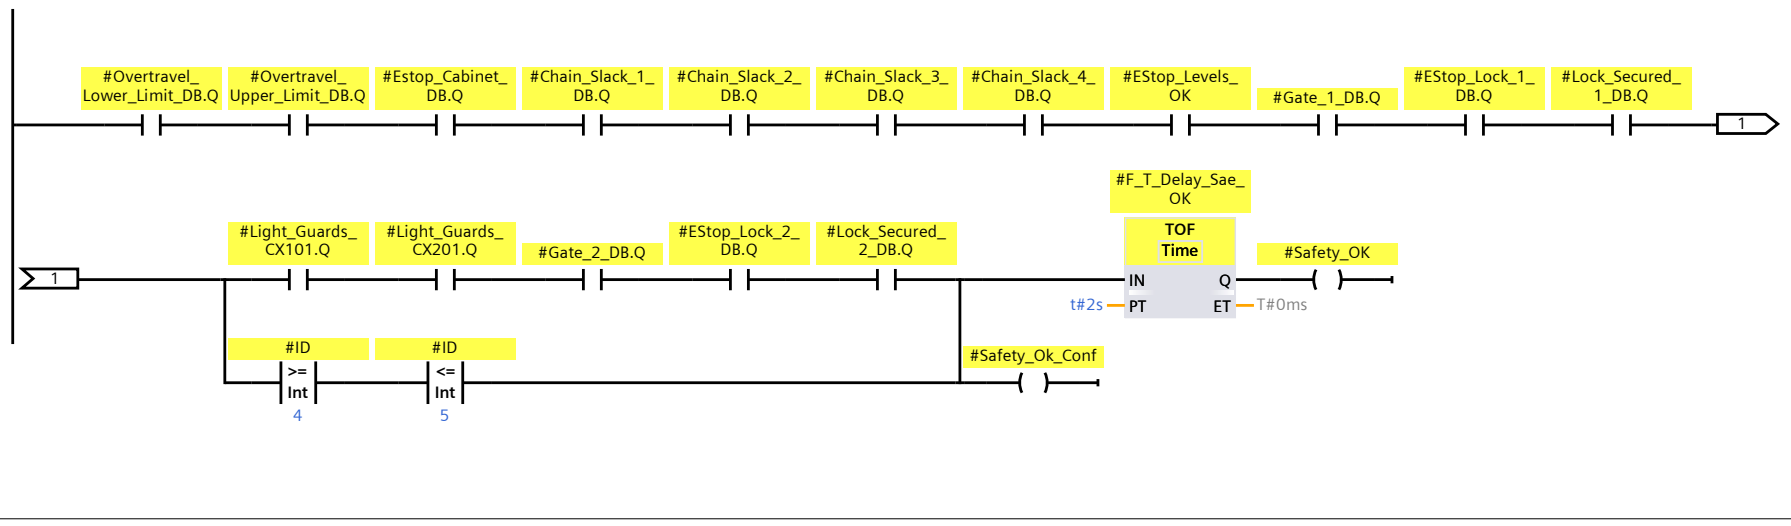

Network 35: Bypass Warning

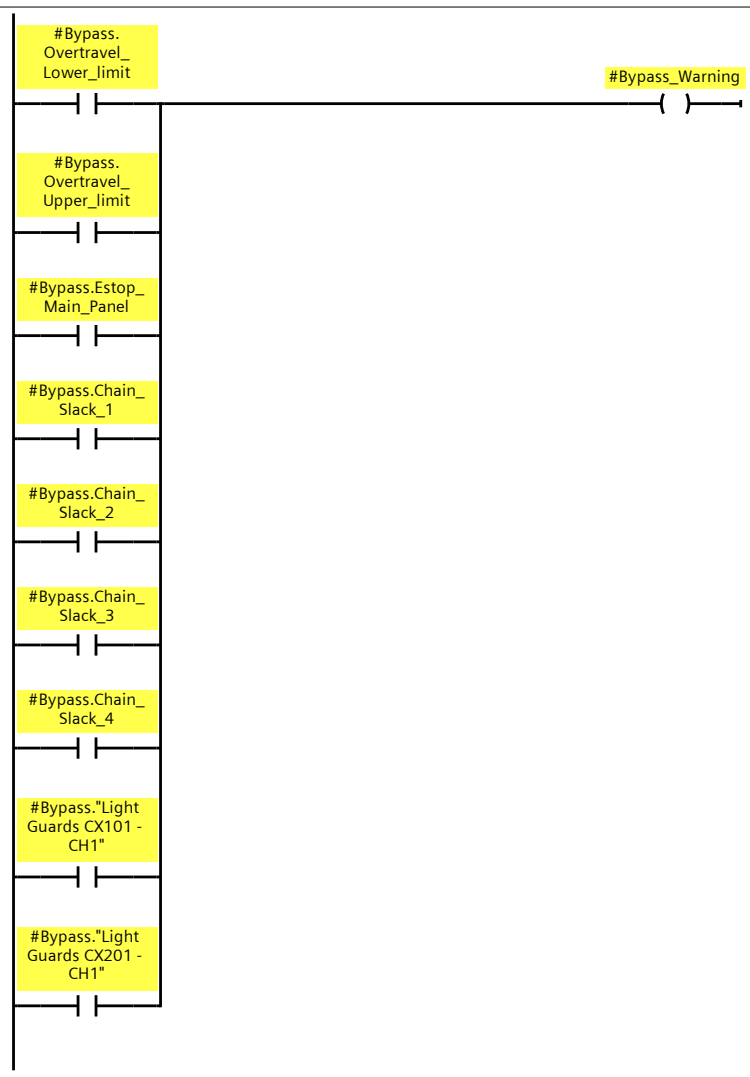

Network 36: Enable outputs

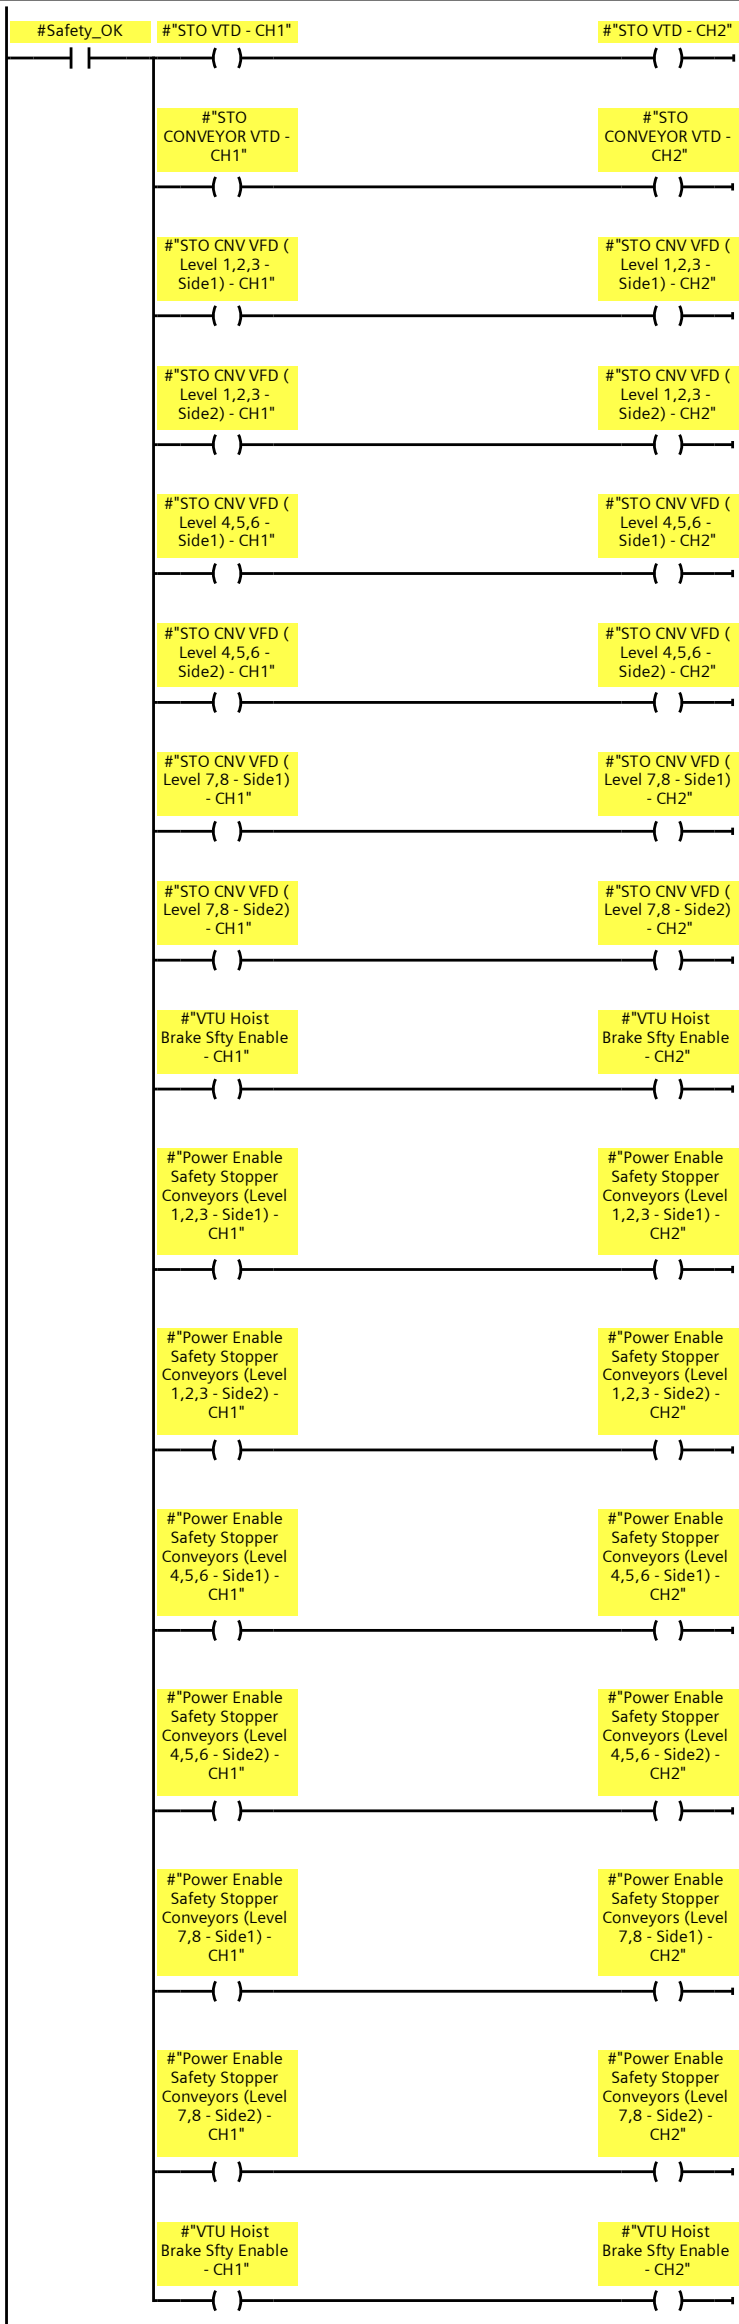

Safety information: BF89821C Consistent; STEP 7 Safety V20 Update 2;