


AHRS IMU Sensor | HWT901B-CAN

The Robust Acceleration, Angular velocity, Angle & Magnetic filed Detector

The HWT901B-CAN is a IMU sensor device, detecting acceleration, angular velocity, angle as well as magnetic filed. The robust housing and the small outline makes it perfectly suitable for industrial applications such as condition monitoring and predictive maintenance. Configuring the device enables the customer to address a broad variety of application by interpreting the sensor data by smart algorithms and Kalman filtering.

BUILT-IN SENSORS



Accelerometer



Gyroscope



Magnetometer



Tutorial Link

[Google Drive](#)

Link to instructions DEMO:

[WITMOTION Youtube Channel](#)

[HWT901B Playlist](#)

If you have technical problems or cannot find the information that you need in the provided documents, please contact our support team. Our engineering team is committed to providing the required support necessary to ensure that you are successful with the operation of our AHRS sensors.

Contact

[Technical Support Contact Info](#)

Application

- AGV Truck
- Platform Stability
- Auto Safety System
- 3D Virtual Reality
- Industrial Control
- Robot
- Car Navigation
- UAV
- Truck-mounted Satellite Antenna Equipment



Contents

Tutorial Link	- 2 -
Contact	- 2 -
Application.....	- 2 -
Contents	- 3 -
1 Overview.....	- 4 -
2 Features	- 5 -
Specification	- 6 -
3.1 Accelerometer parameters.....	- 6 -
3.2 Gyroscope parameters	- 6 -
Magnetometer parameters	- 7 -
3.3 Pitch and roll angle parameters	- 7 -
3.4 Heading angle parameter.....	- 8 -
3.5 Module parameters	- 9 -
Basic parameters	- 9 -
Electrical parameters	- 9 -
3.6 Size.....	- 10 -
3.7 Axial Direction.....	- 11 -
4 Line Color Function	- 12 -
5 Communication Protocol	- 13 -



1 Overview

HWT901B-CAN's scientific name is AHRS IMU sensor. A sensor measures 3-axis angle, angular velocity, acceleration and magnetic field. Its strength lies in the algorithm which can calculate three-axis angle accurately.

HWT901B-CAN is employed where the highest measurement accuracy is required. It offers several advantages over competing sensor:

- Heated for best data availability: new WITMOTION patented zero-bias automatic detection calibration algorithm outperforms traditional accelerometer sensor.
- High precision Roll Pitch Yaw (X Y Z axis) Acceleration + Angular Velocity + Angle + Magnetic Field output.
- Low cost of ownership: remote diagnostics and lifetime technical support by WITMOTION service team.
- Developed tutorial: providing manual, datasheet, Demo video, PC software, mobile phone APP, and 51 serial, STM32, Arduino, and Matlab sample code, communication protocol.
- WITMOTION sensors have been praised by thousands of engineers as a recommended attitude measurement solution.



2 Features

- Attitude measurement accuracy static 0.05 degrees, dynamic 0.1 degrees, high stability.
- The module consists of a high precision gyroscope, accelerometer, geomagnetic field and barometer sensor. The product can solve the current real-time motion posture of the module quickly by using the high-performance microprocessor, advanced dynamic solutions and Kalman filter algorithm.
- The advanced digital filtering technology of this product can effectively reduce the measurement noise and improve the measurement accuracy.
- High seismic performance: >3500g, IP67 protection grade.
- Wide temperature working: -40 ~ +85°C.

Specification

3.1 Accelerometer parameters

Parameter	Condition	Typical
Range		$\pm 16g$
Resolution	$\pm 16g$	0.0005 (g/LSB)
RMS noise	Bandwidth = 100Hz	0.75~1mg-rms
Static zero drift	Placed horizontally	$\pm 20 \sim 40mg$
Temperature drift	$-40^{\circ}C \sim +85^{\circ}C$	$\pm 0.15mg/^{\circ}C$
Bandwidth		5~256Hz

3.2 Gyroscope parameters

Parameter	Condition	Typical
Range		$\pm 2000^{\circ}/s$
Resolution	$\pm 2000^{\circ}/s$	0.061 ($^{\circ}/s$) / (LSB)
RMS noise	Bandwidth = 100Hz	0.028~0.07 ($^{\circ}/s$) -rms
Static zero drift	Placed horizontally	$\pm 0.5 \sim 1^{\circ}/s$
Temperature drift	$-40^{\circ}C \sim +85^{\circ}C$	$\pm 0.005 \sim 0.015 (^{\circ}/s)/^{\circ}C$
Bandwidth		5~256Hz

Magnetometer parameters

Parameter	Condition	Typical value
Measuring range	Loop count value (200)	-800uT to +800 uT
Linearity $\pm 200\mu\text{T}$	Loop count value (200)	0.6%
Resolution	Loop count value (200)	13nT/LSB

3.3 Pitch and roll angle parameters

Parameter	Condition	Typical
Range		X: $\pm 180^\circ$
		Y: $\pm 90^\circ$
Inclination accuracy		0.1°
Resolution	Placed horizontally	0.0055°
Temperature drift	-40° C ~ +85° C	$\pm 0.5 \sim 1^\circ$

3.4 Heading angle parameter

Parameter	Condition	Typical
Range		Z: $\pm 180^\circ$
Heading accuracy	9-axis algorithm, magnetic field calibration, dynamic/static	1° (without magnetic field interference) 【1】
	6-axis algorithm, static	0.5° (Dynamic integral cumulative error exists) 【2】
Resolution	Placed horizontally	0.0055°

Note:

【1】 Please perform magnetic field calibration in the test environment before use to ensure that the sensor is familiar with the magnetic field in the environment. When calibrating, please keep away from magnetic interference.

【2】 In some vibration environments, there will be cumulative errors, and the specific errors cannot be estimated. The actual test shall prevail.

3.5 Module parameters

Basic parameters

parameter	Condition	Minimum	Default	Maximum
Communication Interface	UART	4800bps	9600bps	230400bps
	CAN	3K	250K	1M
Output content		On-chip time, acceleration: 3D, angular velocity: 3D, magnetic field: 3D, angle: 3D		
Output rate 【1】		0.2Hz	10Hz	200Hz
Start Time				1000ms
Operating temperature		-40℃		85℃
Storage temperature		-40℃		100℃
Shock proof				20000g


Note:

【1】 The 485 product is Modbus protocol, master-slave mode, determined by the number of read content and the read rate of the user.

Electrical parameters

Parameter	Condition	Minimum	Default	Maximum
Supply voltage		5V	12V	36V
Working current	Work (12V)		4.5mA (TTL) 5.3mA (232) 12mA (485)	

3.6 Size

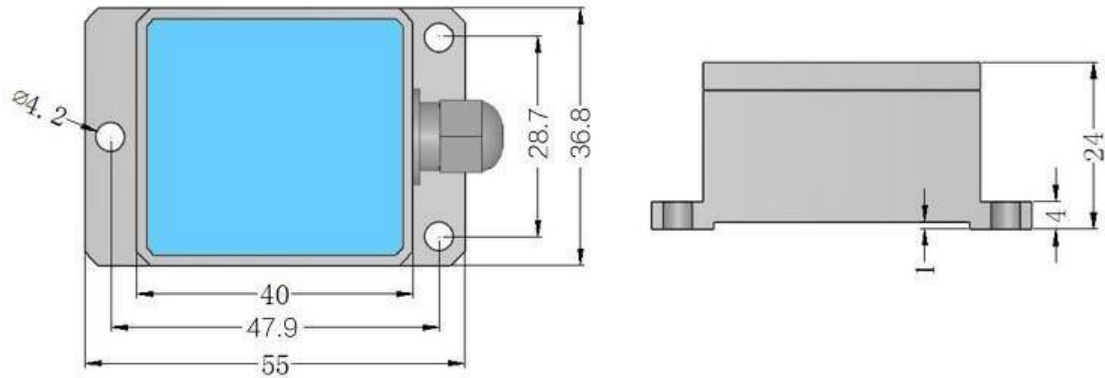

Parameter	Specification	Tolerance	Comment
Length	55	± 0.1	Unit: millimeter.
Width	36.8	± 0.1	
Height	24	± 0.1	
Weight	100	± 1	Unit: gram

3.7 Axial Direction

The coordinate system used for attitude angle calculation is the northeast sky coordinate system. Place the module in the positive direction, as follows, the X axis is to the right, the Y axis is upward, and the Z axis is perpendicular to the outside of the paper. The Euler angles represent the rotation order of the coordinate system when the attitude is defined as Z-Y-X, that is, it rotates around the Z axis first, then around the Y axis, and then around the X axis.




4 Line Color Function

Dupont line version:

Line Color	RED	YELLOW	GREEN	BLACK
Name	VCC 5-36V	CANH	CANL	GND
Function	Positive power supply	CAN High	CAN Low	Negative power supply

Please refer to the following figure

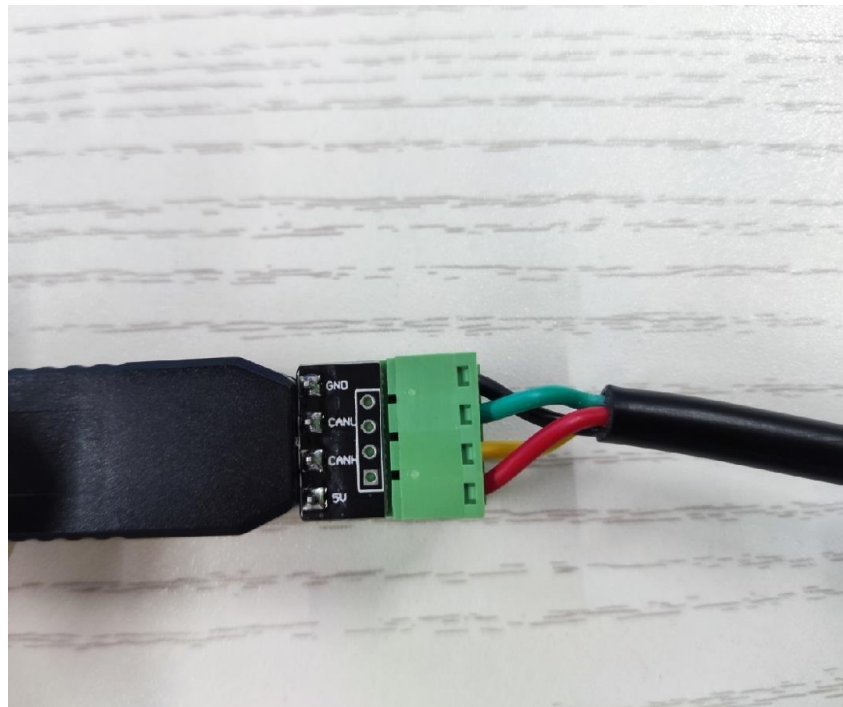



5 Communication Protocol

Link to [HWT901B-CAN Protocol](#)