

Оптимизация орбитальной группировки типа Walker при сохранении полного покрытия

Авторы

1 Введение

1.1 Формирование орбитальной группировки как задача системного проектирования

Проектирование орбитального построения многоспутниковой системы целесообразно рассматривать как часть системного проектирования многосоставной космической миссии. Существующие методы системного проектирования космических миссий предлагают подход, где исходными данными служат цели миссии и внешние условия, которые последовательно преобразуются в проверяемые требования к системе и её компонентам [18]. Структура орбитального построения при таком подходе представляет собой одно из архитектурных решений наряду с характеристиками космических аппаратов (КА) и полезной нагрузки, наземного сегмента, радиолиний, схемы развёртывания и программы эксплуатации. Обобщённая методика анализа распределённых спутниковых систем предлагает сопоставлять архитектурные решения по совокупности показателей возможностей, производительности, стоимости, доступности и адаптируемости [13]. Поэтому одна и та же общая цель создания системы телекоммуникационных спутников, обеспечивающих доступ к широкополосным сетям, может приводить к различным математическим постановкам в зависимости от того, какие показатели качества обслуживания (Quality of Service, QoS) принимаются как требования, ограничения или целевые функции.

1.2 Требования и ограничения проектируемой системы

Характер требований к системе может сильно отличаться. Одним из базовых требований к спутниковой группировке является покрытие [20]. В зависимости от назначения системы оно может быть глобальным или региональным, непрерывным или периодическим [6, 20], а сам показатель может характеризовать долю обслуживаемой территории, время повторного посещения либо непрерывную доступность хотя бы одного КА [20, 18].

Однако геометрическая видимость спутника ещё не означает предоставления широкополосного доступа (ШПД). Телекоммуникационная теория для обеспечения покрытия в точке поверхности Земли требует преодоления заданного порога качества канала, например по SNR [9, 10].

Для многих космических систем ШПД отдельный класс ограничений связан с защитой геостационарных спутниковых сетей. Статья 22 Регламента радиосвязи и рекомендация ITU-R S.1503-4 предусматривают проверку ограничений эквивалентной плотности потока мощности для негеостационарных систем фиксированной спутниковой службы [8, 7]. Эти требования обычно реализуются средствами управления излучением, однако могут

влиять и на архитектуру группировки. Показателен проект SkyBridge, где требование частотного сосуществования с геостационарными системами совместно с непрерывным покрытием привело к попарной организации плоскостей и специальному фазированию КА построения [10].

Другой важной группой требований является безопасность орбитального движения. Рост количества действующих аппаратов и объектов космического мусора повышает нагрузку на процедуры предупреждения опасных сближений и выполнения манёвров [2]. Работы по непересекающимся относительным траекториям и орбитальной заселенности показывают, что предотвращение опасных сближений может быть учтено непосредственно в структуру построения [1]. Таким образом, выбор орбитального построения представляет собой многокритериальный системный компромисс [9]. В представленной работе реализуется подход, обобщающий описанные ранее требования.

1.3 Выбор типа орбитальной группировки

Выбор оптимальной орбитальной конфигурации зависит от целевого назначения миссии. В задачах глобальной навигации [5, 11], дистанционного зондирования Земли [16] и прерывистого мониторинга применялись различные подходы к распределению спутников. Для задач межспутниковой связи одним из стандартных решений является применение кинематически правильных систем [21], получивших широкое распространение в виде Walker-построений [15] благодаря компактному параметрическому описанию, регулярному распределению аппаратов и удобству предварительного анализа.

Как показывают [6], при многокритериальном проектировании непрерывного глобального покрытия симметричные структуры Walker демонстрируют существенное преимущество над другими паттернами за счёт равномерного распределения интервалов повторного посещения. Развитием этой концепции становятся многослойные структуры Walker, позволяющие более гибко балансировать между зональным и глобальным покрытием [17, 16].

В настоящей работе используется структура, близкая к Walker, но допускающая иной способ задания фазового параметра и распределения орбитальных плоскостей.

1.4 Выбор метода оптимизации

Для решения задач конфигурирования спутниковых группировок в литературе применяется широкий спектр математических и вычислительных методов, каждый из которых имеет свои области применения.

- **Аналитические методы и методы streets-of-coverage.** Задача решается через геометрический анализ зон покрытия. До массового внедрения численных методов проектирование констелляций опиралось на строгую аналитику. Классическим примером служит метод streets of coverage. В его развитие Улыбышев [14] предложил геометрический подход на основе двумерных карт видимости, введя концепцию coverage belt. Это позволило аналитически оценивать revisit time для структур Walker. Однако классический паттерн Walker имеет существенный недостаток: неучёт вращения Земли в фазировке приводит к дрейфу наземных трасс и потере согласованности покрытия. Эту проблему удалось преодолеть Ли (Lee, 2023), разработавшему замкнутое аналитическое решение RGT-Walker.

- **Методы целочисленного линейного программирования (MILP).** Несмотря на вычислительную сложность для больших задач, MILP обеспечивает строгие гарантии оптимальности для дискретных задач конфигурации. Актуальные работы, такие как Rogers et al. (2026), позволяют находить строго оптимальные конфигурации спутников Walker для различных критериев покрытия и связности, хотя и ценой значительных вычислительных затрат при масштабировании.
- **Дифференциальная эволюция.** Новые подходы, использующие градиентные методы и релаксацию целевых функций, позволяют ускорить сходимость в пространствах высокой размерности. Подход Kacker & Cahoy (2026) иллюстрирует, как релаксация задач покрытия и revisit time может быть интегрирована в дифференцируемую оптимизацию, открывая возможности для быстрой итерации проектных решений.
- **Методы машинного обучения.** Для снижения вычислительной нагрузки при оценке сложных орбитальных характеристик применяются суррогатные модели, например на базе радиальных базисных функций, а также методы обучения с подкреплением, демонстрирующие потенциал в адаптивном управлении конфигурацией в условиях неопределённости [12].
- **Эволюционные алгоритмы.** Генетические алгоритмы (GA) доказали свою эффективность в покрытии больших нерегулярных областей [4] и оптимизации навигационных потенциалов, выступая в качестве надёжного инструмента глобального поиска [19]. Исследования, такие как Xunchang Gu et al. (2025) и Shuai Wang et al. (2025), показывают применение генетических алгоритмов и дифференциальной эволюции для эффективного поиска конфигураций мега-конstellаций и многоуровневых группировок. При этом стандартные GA сталкиваются с вычислительными трудностями при росте числа переменных, что стимулирует разработку гибридных схем.

Ни один из этих подходов не является универсальным. Выбор метода определяется структурой конкретной задачи. В настоящей работе математическая постановка задачи предиктована системными требованиями к низкоорбитальной многоспутниковой группировке ШПД. В качестве базовой цели рассматривается сокращение числа космических аппаратов и орбитальных плоскостей при выполнении требований к покрытию, качеству радиолинии, защите геостационарных систем и безопасности орбитального движения. Одни характеристики могут выступать как целевые функции, а другие — как жёсткие ограничения. Выбор оптимизационного метода, наиболее соответствующего полученной структуре задачи, будет производиться после фиксации состава переменных, критериев и ограничений.

2 Parametrization of the orbital configuration

The current work applies a Walker-Star-type constellation [15, 18] as the orbital configuration setup. It is parameterized by the set of parameters $h, i, S, P, \Delta\Omega, f$, where h is the altitude of every circular orbit in the constellation, i is the corresponding orbital inclination, S is the number of satellites per orbital plane, P is the number of orbital planes, $\Delta\Omega$ is the difference in the right ascension of the ascending node (RAAN) between adjacent planes, and f is the interplanar phase shift in the argument of latitude (AOL), which, unlike in the traditional Walker

description, is specified directly as an angular quantity. In addition, α denotes the half-angle of the satellite field-of-view cone measured from the subsatellite direction.

The analytical geometric conditions for continuous coverage proposed further in this work assume the Earth to be a sphere of radius R_E , the equatorial radius of Earth. Therefore, due to the symmetry of the Walker Star configuration with respect to rotation about the Earth axis, without loss of generality, the RAAN of the first orbital plane is not parameterized and is set equal to 0° throughout the paper. Furthermore, in the implemented parameterization, unlike in the classical one, no requirement is imposed for the RAAN of the last plane to be equal to 180° .

Based on these parameters, several key geometric relations are introduced below and are subsequently applied in further coverage assessments.

2.1 Satellite coverage geometry

A Walker Star constellation assumes that all satellites are located in circular orbits at altitude h . Each satellite covers a certain spherical cap on the surface of Earth, whose size is determined by the corresponding central angle θ . The angle θ is constrained by the field-of-view half-angle α , which is determined by the satellite payload characteristics. The relation between these angles follows directly from the geometrical conditions:

$$\frac{R_E}{\sin \alpha} = \frac{|\mathbf{R}_{\text{sat}}|}{\sin(\alpha + \theta)}. \quad (1)$$

In an ideal case, $|\mathbf{R}_{\text{sat}}| = R_E + h$, and therefore the central angle of the covered spherical cap can be expressed as:

$$\theta = \arcsin \left[\left(1 + \frac{h}{R_E} \right) \sin \alpha \right] - \alpha. \quad (2)$$

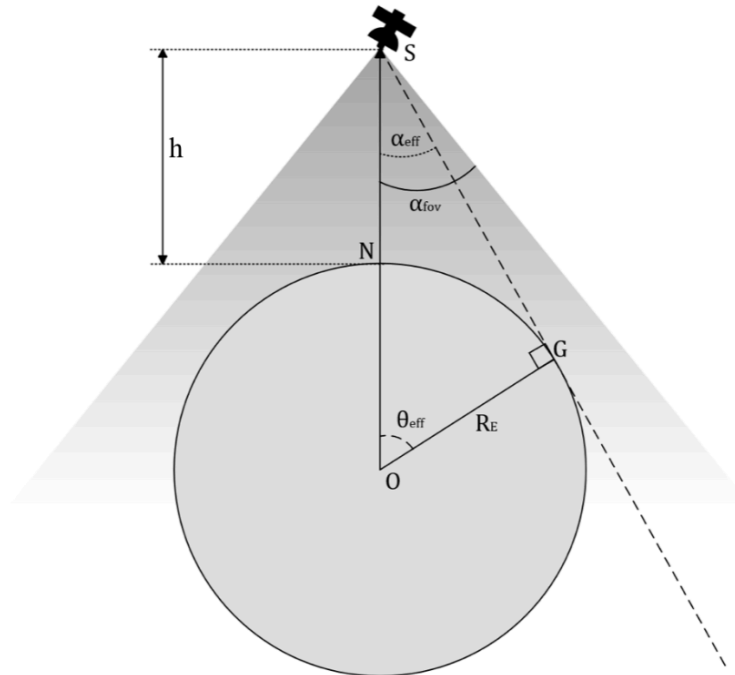


Рис. 1: Single satellite effective field-of-view

In cases where the field-of-view half-angle α extends beyond the Earth limb, an additional constraint is required. The effective field-of-view half-angle α_{eff} is therefore introduced as the maximum angle at which the surface of Earth can be observed from a given altitude. From the simple geometrical relation (Fig. 1), this limiting angle is given by

$$\alpha_{\text{eff}} = \arcsin \left[\frac{R_E}{R_{\text{sat}}} \right] = \arcsin \left[\frac{R_E}{R_E + h} \right]. \quad (3)$$

Thus, the field-of-view half-angle used in the further calculations can be defined as:

$$\alpha^* = \min(\alpha, \alpha_{\text{eff}}) \quad (4)$$

2.2 Street-of-coverage

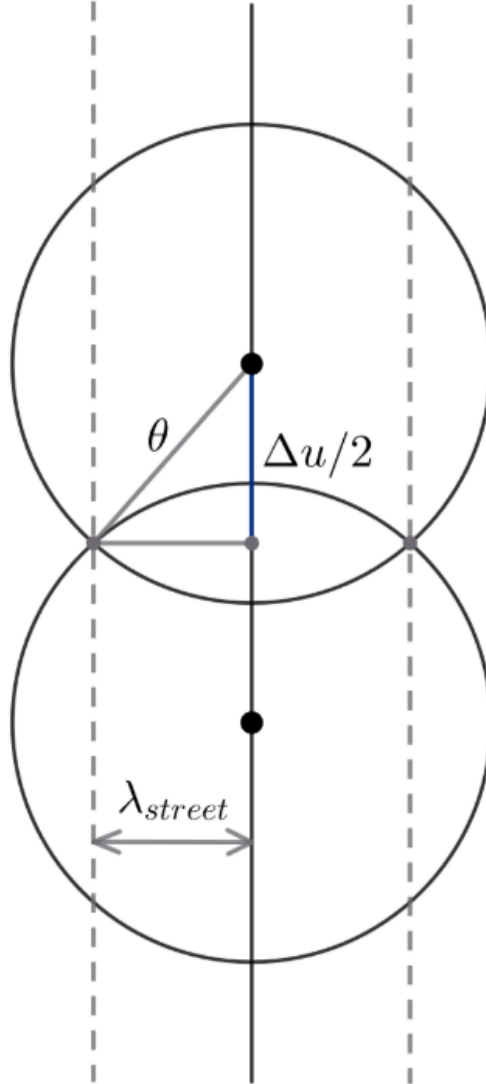


Рис. 2: Single orbital plane street-of-coverage

In order for several satellites within a single orbital plane to provide continuous coverage, it is not sufficient for their instantaneous coverage regions to simply touch. The coverage regions of neighboring satellites must overlap, forming a continuous street-of-coverage along the ground track [14, 18]. The angular half-width of this street, denoted by λ_{street} , can be obtained by applying the spherical law of cosines to the spherical triangle shown in Fig. 2:

$$\lambda_{\text{street}} = \arccos \left(\frac{\cos \theta}{\cos (\Delta u / 2)} \right) \quad (5)$$

where Δu is the AOL between neighboring satellites within the same orbital plane.

2.3 Angular separation between orbital planes

To ensure global coverage, this paper considers conditions on the maximum allowable angular distances between orbital planes. The angular distance between circular orbits, denoted as i_{rel} , is defined as the largest angular distance between the corresponding orbits. The angle between two orbital planes is equal to the angle between their normal vectors. For an orbital plane, based on the definitions of RAAN Ω and inclination i , the normal vector is expressed as follows:

$$\mathbf{n} = (\sin \Omega \sin i, -\cos \Omega \sin i, \cos i), \quad (6)$$

where the direction of the normal vector is determined by the direction of the orbital angular momentum vector $\mathbf{r} \times \mathbf{v}$. Based on the equality of inclinations of the Walker constellation orbital planes, for any two orbital planes the angular distance between them is calculated as

$$\cos i_{\text{rel}} = \frac{\mathbf{n}_1 \cdot \mathbf{n}_2}{|\mathbf{n}_1| |\mathbf{n}_2|} = \cos^2 i + \cos(\Omega_2 - \Omega_1) \sin^2 i. \quad (7)$$

For neighboring orbital planes, this angular distance is

$$i_{\text{rel}} = \arccos (\cos^2 i + \cos \Delta \Omega \sin^2 i). \quad (8)$$

For the angular distance between the first and the last orbital planes, the RAAN difference is $(P - 1)\Delta\Omega$, and therefore

$$i_{\text{rel}} = \arccos (\cos^2 i + \cos ((P - 1)\Delta\Omega) \sin^2 i). \quad (9)$$

For the supplementary angular distance, which will be used further for the retrograde case,

$$i_{\text{rel}} = \pi - \arccos (\cos^2 i + \cos ((P - 1)\Delta\Omega) \sin^2 i). \quad (10)$$

3 Sufficient Geometric Conditions for Continuous Global Coverage

To achieve global coverage, three groups of geometric conditions must be satisfied, accounting for the mutual arrangement of the orbital planes. These include co-orbital, retrograde, and polar conditions. It is important to note that these conditions are sufficient for the spherical Earth model. Since the Earth's ellipsoid is inscribed within this sphere, satisfying these inequalities guarantees full coverage for the actual ellipsoidal model as well.

3.1 Conditions for Co-Orbital Planes

Let adjacent orbital planes be called co-orbital if the spacecraft in them move in the same direction. To prevent coverage gaps between these planes, the distance between them must not exceed the maximum allowable value D . Geometrically, this distance is defined as the sum of half the coverage strip of one plane and the field-of-view radius of the adjacent one:

$$D = \lambda_{street} + \theta. \quad (11)$$

Based on the normal vectors to the orbital planes, the angular distance between two co-orbital planes i_{rel} is expressed through the inclination and the RAAN difference as:

$$\cos i_{rel} = \cos^2 i + \cos(\Delta\Omega) \sin^2 i. \quad (12)$$

Equating this distance to the maximum allowable value ($i_{rel} = D$), we obtain the restriction on the maximum RAAN difference for co-orbital planes:

$$\Delta\Omega_{max} = \arccos \left(\frac{\cos D - \cos^2 i}{\sin^2 i} \right). \quad (13)$$

Choosing $\Delta\Omega \leq \Delta\Omega_{max}$ ensures that no gaps in coorbital planes.

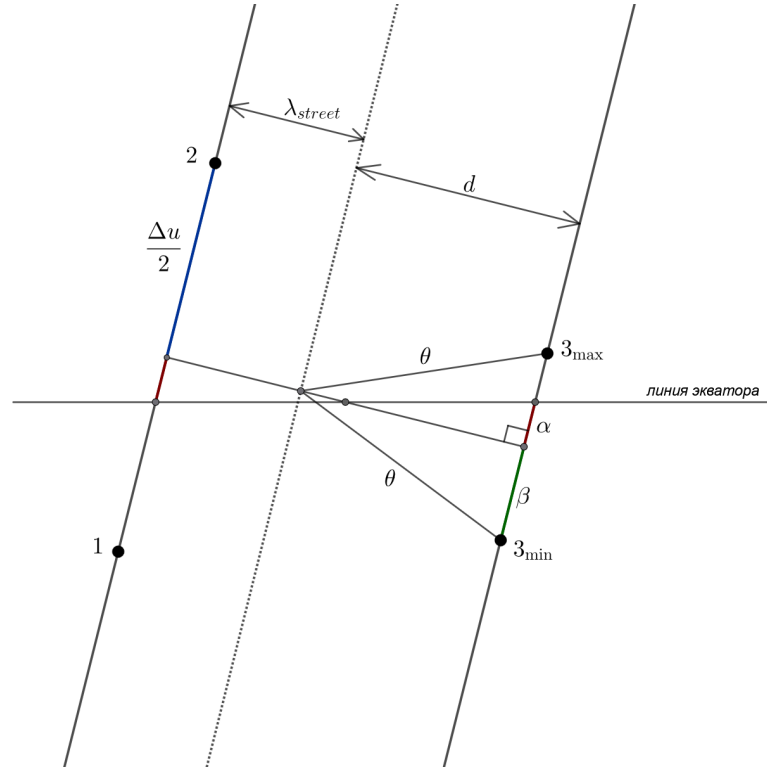


Рис. 3: Diagram of the phase shift between adjacent orbital planes

Furthermore, for co-orbital planes, the influence of the phase shift f must be considered. This shift determines the relative offset of the ground tracks along the intersection of two adjacent planes and, consequently, how the coverage strips overlap. Figure 3 illustrates the mutual geometry of the orbits with a phase shift. We consider two adjacent co-orbital planes with a RAAN difference of $\Delta\Omega$. We assume that the chosen $\Delta\Omega$ lies within the allowable RAAN range. The angular distance between these planes is denoted as i_{rel} .

Since the coverage strip of a single orbit has a width of λ_{street} , the angular distance from the outer edge of one orbit's coverage strip to the adjacent orbit along the arc i_{rel} is:

$$d = i_{\text{rel}} - \lambda_{\text{street}}. \quad (14)$$

To avoid a coverage gap, the spacecraft on the adjacent orbit must be positioned sufficiently close to the boundary of the first orbit's coverage strip. Geometrically, this implies that the angular distance between the spacecraft on the adjacent orbit and the strip boundary must not exceed the central field-of-view angle θ .

On the left orbit, the first spacecraft is located $\Delta u/2$ downward from the intersection of the arc i_{rel} , while the second spacecraft is located $\Delta u/2$ upward. Let us denote the allowable range of the argument of latitude for the spacecraft on the adjacent orbit as $u_{3,\text{min}}$ and $u_{3,\text{max}}$.

We measure the phase shift from the first spacecraft on the left orbit upwards along the direction of motion. If u_3 falls within the range $[u_{3,\text{min}}, u_{3,\text{max}}]$, no coverage gaps will occur between the adjacent planes. The allowable phase shifts are then expressed as:

$$f_{\text{max}} = \frac{\Delta u}{2} + \beta - 2\alpha \quad (15)$$

$$f_{\text{min}} = \frac{\Delta u}{2} - \beta - 2\alpha \quad (16)$$

From spherical geometry, we can express the allowable deviation in argument of latitude β and the offset α :

$$\beta = \arccos\left(\frac{\cos \theta}{\cos d}\right) \quad (17)$$

$$\alpha = \arccos\left(\frac{\cos(\frac{\Delta \Omega}{2})}{\cos(\frac{i_{\text{rel}}}{2})}\right) \quad (18)$$

By substituting the expressions for α and β into (15), we obtain the final analytical formulas for calculating the phase shift boundaries:

$$f_{\text{max}} = \frac{\Delta u}{2} + \arccos\left(\frac{\cos \theta}{\cos d}\right) - 2 \arccos\left(\frac{\cos(\frac{\Delta \Omega}{2})}{\cos(\frac{i_{\text{rel}}}{2})}\right) \quad (19)$$

$$f_{\text{min}} = \frac{\Delta u}{2} - \arccos\left(\frac{\cos \theta}{\cos d}\right) - 2 \arccos\left(\frac{\cos(\frac{\Delta \Omega}{2})}{\cos(\frac{i_{\text{rel}}}{2})}\right) \quad (20)$$

Selecting a phase shift $f \in [f_{\text{min}}, f_{\text{max}}]$ guarantees continuous coverage between co-orbital planes.

3.2 Conditions for Retrograde Planes

Adjacent planes in which spacecraft move in opposite directions are called retrograde. In a Walker constellation, these are the first and last planes.

For a given number of planes P , the longitude of the ascending node of the last plane is determined as:

$$\Omega_P = (P - 1)\Delta\Omega_{\text{max}}, \quad (21)$$

where $\Delta\Omega_{\text{max}}$ is the maximum RAAN step obtained for the co-orbital planes (13).

If $\Delta\Omega_{\max} < \pi$, it is necessary to verify whether a coverage gap exists on the retrograde orbits.

For retrograde planes, the maximum allowable angular distance between them is defined as the sum of two coverage strips:

$$D_{re} = 2\lambda_{\text{street}}. \quad (22)$$

The angular distance between the first and last planes can be computed as follows:

$$\cos i_{rel} = \cos^2 i + \cos((P-1)\Delta\Omega_{\max}) \sin^2 i. \quad (23)$$

This distance i_{rel} corresponds to the angle between the planes when measured between their ascending nodes.

To assess the coverage gap between retrograde planes, we must determine the angle measured specifically between these retrograde planes. It is given by:

$$i_{rel}^{(re)} = \pi - i_{rel}. \quad (24)$$

If the condition $i_{rel}^{(re)} \leq D_{re}$ holds, the coverage on the retrograde planes remains continuous. Otherwise, a coverage gap occurs.

Unlike the co-orbital case, the phase shift f has no effect on the coverage on retrograde orbits. The planes move toward each other, and their mutual geometric position remains fixed at any given moment.

Equating the angular distance between the first and last planes $i_{rel}^{(re)}$ to D_{re} , we obtain the expression for the minimum allowable RAAN difference at which no coverage gap occurs:

$$\Delta\Omega_{\min} = \frac{1}{(P-1)} \arccos\left(\frac{-\cos D_{re} - \cos^2 i}{\sin^2 i}\right). \quad (25)$$

Thus, for retrograde planes, the RAAN difference is chosen based on the condition $\Delta\Omega \geq \Delta\Omega_{\min}$. In this case, the geometric position of such planes remains fixed during satellite motion, and the phase shift does not influence the continuity of coverage.

3.3 Polar Conditions

Earth pole coverage requires specific analysis. For orbits with inclinations less than 90° , the projections of satellite trajectories onto the Earth's surface do not pass through the poles. Instead, the ground tracks reach their maximum latitude corresponding to the orbital inclination. Even if the Walker constellation parameters are chosen such that no coverage gaps occur between adjacent orbital planes, a "claw" shaped region around the pole may remain uncovered (Fig. 4). If all groundtrack projections near the pole are expanded by the street-of-coverage half-width λ_{street} , the remaining region forms the polygon of interest. To ensure that this region remains covered, the following condition must be satisfied:

$$\lambda_{\text{street}} \geq \left| \frac{\pi}{2} - i \right|. \quad (26)$$

Under this condition, the streets-of-coverage of all orbital planes pass through the pole in the worst-case configuration and cover the otherwise uncovered region. This constraint is imposed on the streets of coverage to account for retrograde orbits. The traditional condition $\lambda_{\text{street}} > 0$ [18] is achieved only in the limited case of $i = \frac{\pi}{2}$.

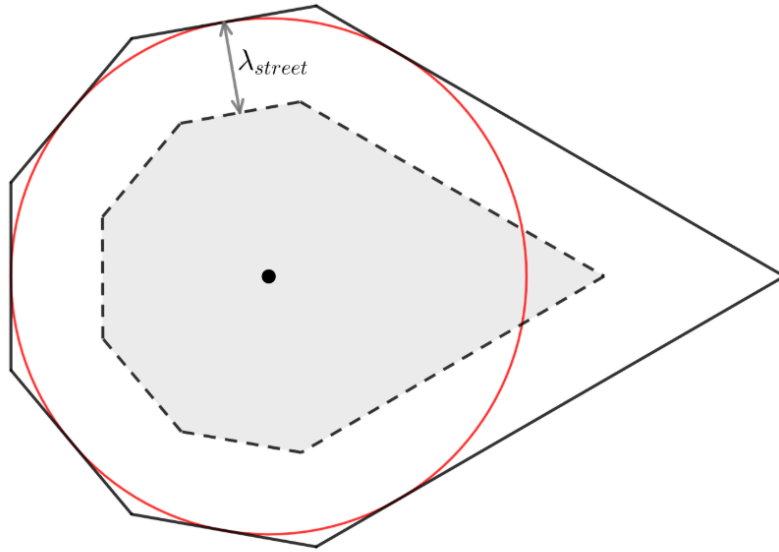


Рис. 4: Uncovered polar polygon: red circle - points with latitude corresponding to the orbital inclination

4 Оценка зоны радиовидимости спутника по энергетике

Угол обзора спутника определяется как максимальный угол $\alpha_{\max}$ между направлением из КА в центр Земли и направлением на обслуживаемую точку на Земле. Угол обзора может быть не зафиксирован, вместо этого он может быть определен требуемым качеством радиоканала. Качество радиоканала определяется заданным порогом отношения сигнал/шум $\text{SNR}_{\min}$. Для каждой точки земной поверхности должно выполняться условие $\text{SNR} \geq \text{SNR}_{\min}$, что напрямую ограничивает максимальную наклонную дальность $d_{\max}$, следовательно, определяет $\alpha_{\max}$. Это связывает геометрию группировки с энергетическими характеристиками радиолиний.

4.1 Геометрия задачи и связь с наклонной дальностью

На рисунке ?? представлена геометрия задачи. КА находится на высоте h над поверхностью Земли (экваториальный радиус Земли R_E). Геометрическая дальность до точки на поверхности обозначена как $d_{\max}$.

Максимальный угол $\alpha_{\max}$ находится из решения треугольника, образованного центром Земли, спутником и точкой на поверхности, по теореме косинусов:

$$\cos \alpha_{\max}(d_{\max}) = \frac{(R_{\text{Earth}} + h)^2 + d_{\max}^2 - R_E^2}{2(R_E + h)d_{\max}}.$$

Таким образом, геометрия обзора напрямую связана с максимальной наклонной дальностью $d_{\max}$, которая, в свою очередь, ограничена энергетикой радиолинии.

4.2 Энергетика радиолинии

На спутнике установлена АФАР. Заданы параметры передающей и приемной антенн: мощность передатчика P_{tx} (Вт), коэффициенты усиления $G_{tx}^{(0)}$ и $G_{rx}^{(0)}$ (в дБи) в направлении

максимального излучения, шумовая температура приемника T_n (К), полоса сигнала B (Гц) и несущая частота f (Гц).

Расчет SNR производится по формуле:

$$\text{SNR} = P_{tx} + G_{tx} + G_{rx}(h) - L_{fs} - P_n \quad (27)$$

Согласно формуле Фрииса [3], потери в свободном пространстве на наклонной дальности d составляют (в дБ):

$$L_{fs}(d) = 20 \log_{10} \left(\frac{4\pi d}{\lambda} \right), \quad (28)$$

где $\lambda = c/f$ – длина волны, c – скорость света.

Мощность шума на входе приемной антенны (в дБВт):

$$P_n = 10 \log_{10}(k T_n B), \quad (29)$$

где k – постоянная Больцмана.

При отклонении луча от нормали антенны усиление снижается за счет потерь на сканирование. Для оценки границы зоны обслуживания в используются эффективные значения коэффициентов усиления на краю зоны радиовидимости 30. Предельно допустимый угол сканирования АФАР принимается равным $\psi_{\max} = 60^\circ$. Такое упрощение позволяет рассматривать зависимость угла обзора от высоты как квадратичную функцию, что дает возможность искать решение аналитически. Это критично для скорости работы оптимизатора орбитальной группировки.

$$G^{\text{eff}} = G^{(0)} + 10 \log_{10}(\cos \psi^{\max}). \quad (30)$$

На границе зоны радиовидимости выполняется равенство $\text{SNR} = \text{SNR}_{\min}$. С учетом потерь в свободном пространстве 28 и эффективных усилений 30 получаем:

$$\text{SNR}_{\min} = P_{tx} + G_{tx}^{\text{eff}} + G_{rx}^{\text{eff}} - 20 \log_{10} \left(\frac{4\pi d_{\max}}{\lambda} \right) - P_n. \quad (31)$$

Тогда максимальная наклонная дальность выражается следующим образом:

$$d_{\max}(h) = \frac{\lambda}{4\pi} \cdot 10^{\frac{M - \text{SNR}_{\min}}{20}}, \quad (32)$$

где

$$M = P_{tx} + G_{tx}^{\text{eff}} + G_{rx}^{\text{eff}} - P_n \quad (33)$$

В данной модели не учитываются дополнительные потери распространения. При необходимости они могут быть учтены путем добавления соответствующего запаса к пороговому значению $\text{SNR}_{\min}$.

4.3 Влияние на выбор орбитального построения

Таким образом, зависимость $\alpha_{\max}(h)$ учитывает и энергетику радиолинии и геометрические ограничения. Число спутников, необходимое для глобального непрерывного покрытия, обратно пропорционально величине угла обзора: чем шире зона радиовидимости каждого спутника, тем меньшим количеством спутников можно покрыть всю земную поверхность. При понижении высоты КА уменьшаются потери в свободном пространстве, что позволяет увеличить максимальную наклонную дальность $d_{\max}$ при заданном $\text{SNR}_{\min}$.

Соответственно, увеличивается и угол обзора $\alpha_{\max}$ (вплоть до технического предела $\psi_{\max}$). Однако понижение высоты при фиксированном угле обзора требует большего количества КА для обеспечения непрерывного покрытия.

Следовательно, оптимизатор орбитальной группировки балансирует между увеличением зоны радиовидимости (за счет роста $\alpha_{\max}$ при снижении высоты) и увеличением числа спутников, необходимого для полного покрытия Земли при понижении высоты. Это позволяет находить высоту спутниковой группировки, при которой требуется количество КА в группировке минимально при соблюдении заданного качества связи $\text{SNR}_{\min}$.

Список литературы

- [1] David Arnas and Richard Linares. Non-self-intersecting trajectories and their applications to satellite constellation design and orbital capacity. *Journal of Guidance, Control, and Dynamics*, 46(3):417–430, 2023. doi: 10.2514/1.G007208.
- [2] European Space Agency. Esa space environment report 2025. Technical report, ESA Space Debris Office, 2025. URL https://www.esa.int/Space_Safety/Space_Debris/ESA_Space_Environment_Report_2025. Based on data collected through the end of 2024.
- [3] H. T. Friis. A note on a simple transmission formula. *Proceedings of the IRE*, 34(5): 254–256, 1946. doi: 10.1109/JRPROC.1946.234568.
- [4] X. Gu et al. High-efficiency design of mega-constellation based on genetic algorithm coverage optimization. *Symmetry*, 17(10):1619, 2025. doi: 10.3390/sym17101619.
- [5] M. Guan et al. Optimal walker constellation design of leo-based global navigation and augmentation system. *Remote Sensing*, 12(11):1845, 2020. doi: 10.3390/rs12111845.
- [6] Simeng Huang, Camilla Colombo, and Franco Bernelli-Zazzera. Multi-criteria design of continuous global coverage walker and street-of-coverage constellations through property assessment. *Acta Astronautica*, 188:151–170, 2021. doi: 10.1016/j.actaastro.2021.07.002.
- [7] International Telecommunication Union. Functional description to be used in developing software tools for determining conformity of non-geostationary-satellite orbit fixed-satellite service systems or networks with limits contained in article 22 of the radio regulations. Technical Report Recommendation ITU-R S.1503-4, International Telecommunication Union, September 2023. URL <https://www.itu.int/rec/R-REC-S.1503-4-202309-I/en>.
- [8] International Telecommunication Union. *Radio Regulations*. International Telecommunication Union, Geneva, 2024 edition, 2024. URL <https://www.itu.int/pub/R-REG-RR-2024>.
- [9] Erick Lansard and Jean-Luc Palmade. Satellite constellation design: Searching for global cost-efficiency trade-offs. In Jozef C. van der Ha, editor, *Mission Design & Implementation of Satellite Constellations*, pages 23–31. Kluwer Academic Publishers, Dordrecht, 1998. ISBN 978-94-010-6137-7.

- [10] Jean-Luc Palmade, E. Frayssinhes, V. Martinot, and Erick Lansard. The skybridge constellation design. In Jozef C. van der Ha, editor, *Mission Design & Implementation of Satellite Constellations*, pages 133–140. Kluwer Academic Publishers, Dordrecht, 1998. ISBN 978-94-010-6137-7.
- [11] C. Qin et al. The optimization of low earth orbit satellite constellation visibility with genetic algorithm for improved navigation potential. *Scientific Reports*, 15(1):30798, 2025. doi: 10.1038/s41598-025-16815-7.
- [12] Z. Shang. Towards future communication: Ai-based satellite constellation orbit optimization and design for underserved areas. *TechRxiv*, 2025. doi: 10.36227/techrxiv.173611339.95570965/v2.
- [13] Graeme B. Shaw and Daniel E. Hastings. A generalized analysis methodology for distributed satellite systems. In Jozef C. van der Ha, editor, *Mission Design & Implementation of Satellite Constellations*, pages 33–49. Kluwer Academic Publishers, Dordrecht, 1998. ISBN 978-94-010-6137-7.
- [14] Y. Ulybyshev. Geometric approach to walker constellation coverage analysis. *Journal of Spacecraft and Rockets*, 2014.
- [15] John G. Walker. Some circular orbit patterns providing continuous whole earth coverage. *Journal of the British Interplanetary Society*, 24:369–384, 1971. URL <https://www.semanticscholar.org/paper/844a177782140d6a13af67317f814a35291fe178>.
- [16] S. Wang et al. Multi-layer leo constellation optimization based on d-nsde algorithm. *Remote Sensing*, 17(6):994, 2025. doi: 10.3390/rs17060994.
- [17] Y. Wang et al. A poa-qpsa hybrid algorithm for multi-objective optimization of dual-layer walker constellations. *Sensors*, 26(4):1391, 2026. doi: 10.3390/s26041391.
- [18] James R. Wertz. *Orbit & Constellation Design & Management*. Spacecraft Orbit and Attitude Systems. Microcosm Press and Springer, Hawthorne, California and New York, 2001. ISBN 978-1-881883-07-8. Second printing, 2009.
- [19] W. R. Whittecar and M. P. Ferringer. Global coverage constellation design exploration using evolutionary algorithms. In *AIAA SPACE Forum*, 2014. AIAA 2014-4159.
- [20] David O. Williams Rogers, Dongshik Won, Dongwook Koh, Kyungwoo Hong, and Hang Woon Lee. Optimal design of satellite constellation configurations with mixed integer linear programming. *arXiv preprint arXiv:2507.09855*, 2025. doi: 10.48550/arXiv.2507.09855. URL <https://arxiv.org/abs/2507.09855>.
- [21] Г. В. Можяев. *Синтез орбитальных структур спутниковых систем: теоретико-групповой подход*. Машиностроение, Москва, 1989. ISBN 5-217-00592-0. URL <https://books.google.ru/books?id=MdceAAAACAAJ>.