



LED Flood Light Series

An energy efficient LED alternative to conventional H.I.D.flood lighting, and an excellent solution for outdoor lighting,including building walls,outdoor sports venues,and billboards.

- Ultra-high brightness
- High efficiency-up to 80% energy savings
- High Color Rendering Index with 3 white color choices
- Long life-up to 50,000 hours



155A 10th St., Passaic,NJ 07055

Phone:(973)575-2600 Fax:(973)575-2603

www.g2glighting.com

LED Flood Light Series

10W 100-240VAC 50/60Hz





LED Flood Light G2GFL10W

Features

Model No.	G2GFL10W
Power	10W
LED Quantity	1PC Integrated Bridgelux SMD LEDs
Color	Warm / Natural / Cool white
Color Temperature	3000-3500K/4000-4500K/6000-6500K
CRI	≥75
Life-span	≥50,000 Hours
Lumens	900 +/- 50LM
Beam Angle	120°
Material	Aluminum + Tempered glass
Weight	0.5KGs
Package Spec.	24PCS/CTN

Technical

Working Environment	-37°C - 55°C
Working Humidity	≤95%
Storage Condition	-40°C~80°C
Input Voltage	100-240VAC 50/60Hz
Input Current	0.04A - 0.10A
Protection Level	IP65(outdoor use)

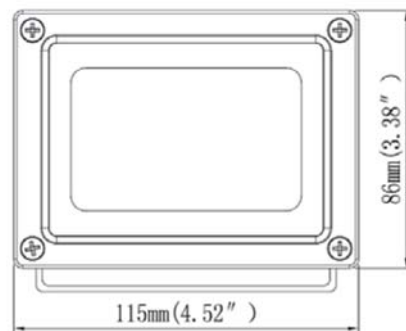

LED Flood Light Series

20W 100-277VAC 50/60Hz





Features

Model No.	G2GFL20W
Power	20W
LED Quantity	1PC Integrated Bridgelux SMD LEDs
Color	Warm / Natural / Cool white
Color Temperature	3000-3500K/4000-4500K/6000-6500K
CRI	≥75
Life-span	≥50,000 Hours
Lumens	1,800+/-100LM
Beam Angle	60°/ 120°
Material	Aluminum + Tempered glass
Weight	1.3KGs
Package Spec.	12PCS/CTN

Technical

Working Environment	-37°C - 55°C
Working Humidity	≤95%
Storage Condition	-40°C~80°C
Input Voltage	100-277VAC 50/60Hz
Input Current	0.07A - 0.20A
Protection Level	IP65(outdoor use)

LED Flood Light G2GFL20W

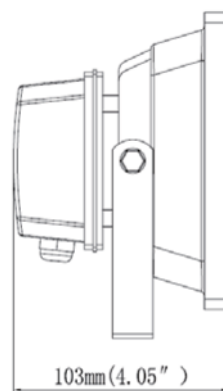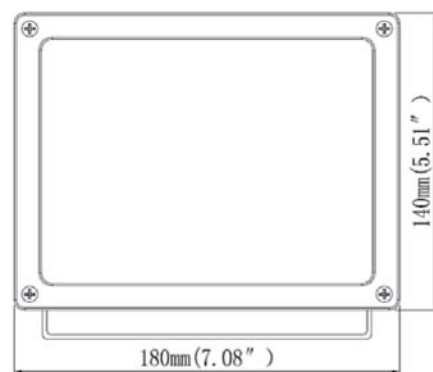

LED Flood Light Series

30W 100-277VAC 50/60Hz





LED Flood Light G2GFL30W

Features

Model No.	G2GFL30W
Power	30W
LED Quantity	1PC Integrated Bridgelux SMD LEDs
Color	Warm / Natural / Cool white
Color Temperature	3000-3500K/4000-4500K/6000-6500K
CRI	≥75
Life-span	≥50,000 Hours
Lumens	2,700+/- 100LM
Beam Angle	60°/ 120°
Material	Aluminum + Tempered glass
Weight	2.4KGs
Package Spec.	8PCS/CTN

Technical

Working Environment	-37°C - 55°C
Working Humidity	≤95%
Storage Condition	-40°C~80°C
Input Voltage	100-277VAC 50/60Hz
Input Current	0.10A - 0.30A
Protection Level	IP65(outdoor use)

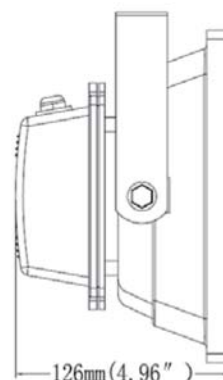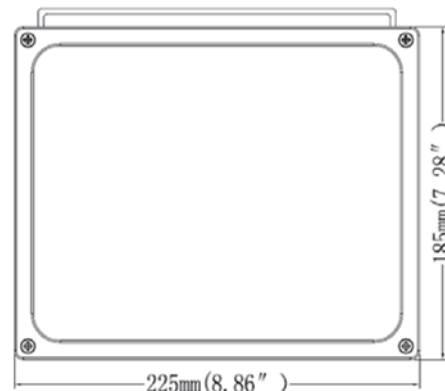

LED Flood Light Series

50W 100-277VAC 50/60Hz





LED Flood Light G2GFL50W

Features

Model No.	G2GFL50W
Power	50W
LED Quantity	1PC Integrated Bridgelux SMD LEDs
Color	Warm / Natural / Cool white
Color Temperature	3000-3500K/4000-4500K/6000-6500K
CRI	≥75
Life-span	≥50,000 Hours
Lumens	4,500+/-100LM
Beam Angle	60°/ 120°
Material	Aluminum + Tempered glass
Weight	3.0KGs
Package Spec.	6PCS/CTN

Technical

Working Environment	-37°C - 55°C
Working Humidity	≤95%
Storage Condition	-40°C~80°C
Input Voltage	100-277VAC 50/60Hz
Input Current	0.20A - 0.50A
Protection Level	IP65(outdoor use)

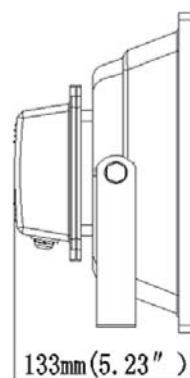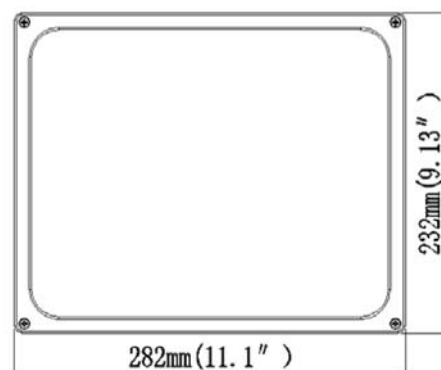

LED Flood Light Series

100W 100-277VAC 50/60Hz





LED Flood Light G2GFL100W

Features

Model No.	G2GFL100W
Power	100W
LED Quantity	1PC Integrated Bridgelux SMD LEDs
Color	Warm / Natural / Cool white
Color Temperature	3000-3500K/4000-4500K/6000-6500K
CRI	≥75
Life-span	≥50,000 Hours
Lumens	9,000 +/- 100LM
Beam Angle	60°/ 120°
Material	Aluminum + Tempered glass
Weight	6.0KGs
Package Spec.	4PCS/CTN

Technical

Working Environment	-37°C - 55°C
Working Humidity	≤95%
Storage Condition	-40°C~80°C
Input Voltage	100-277VAC 50/60Hz
Input Current	0.36A - 1.00A
Protection Level	IP65(outdoor use)

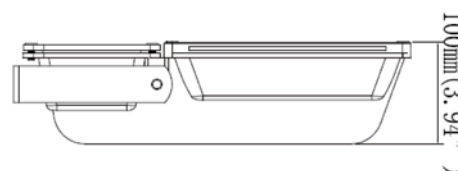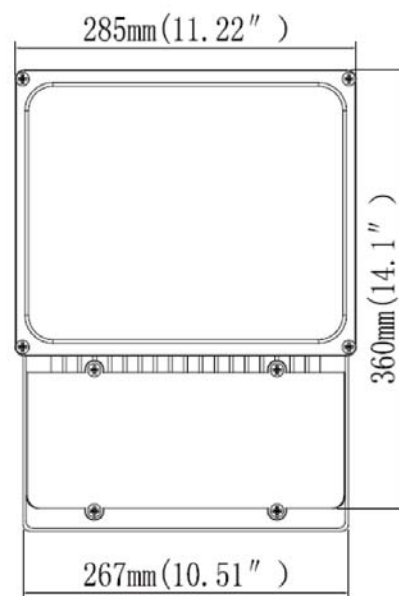

LED Flood Light Series

150W 100-277VAC 50/60Hz



LED Flood Light G2GFL150W

Features

Model No.	G2GFL150W
Power	150W
LED Quantity	3PC Integrated Bridgelux SMD LEDs
Color	Warm / Natural / Cool white
Color Temperature	3000-3500K/4000-4500K/6000-6500K
CRI	≥75
Life-span	≥50,000 Hours
Lumens	13,500 +/- 100LM
Beam Angle	60°/ 120°
Material	Aluminum + Tempered glass
Weight	10.0KGs
Package Spec.	2PCS/CTN

Technical

Working Environment	-37°C - 55°C
Working Humidity	≤95%
Storage Condition	-40°C~80°C
Input Voltage	100-277VAC 50/60Hz
Input Current	0.54A -1.50A
Protection Level	IP65(outdoor use)

