


# AURORA I Gen IV

New Generation Aurora Series

The new generation G2G Aurora I Gen IV LED modules are innovatively designed as an optimal solution for outdoor and indoor lighting. Ideal for channel letters, illuminated light boxes and decorative architectural lighting.

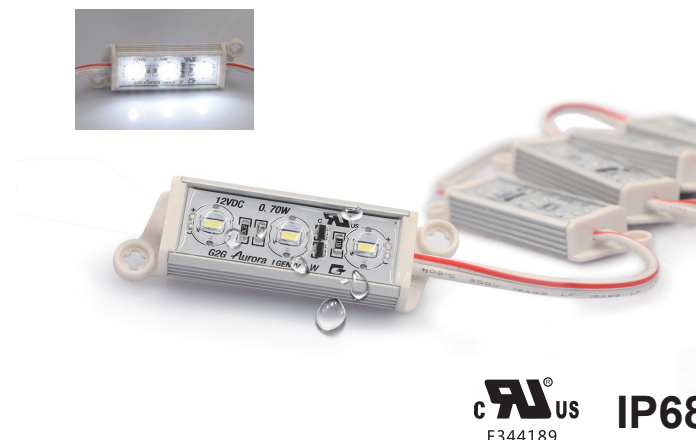

## RECOMMENDED COVERAGE CHART

Depth	5"	6"	7"	8"
Spacing	6"	7"	8"	9"

## LED MODULE SPECIFICATIONS

Working mode	Constant Current Technology (CCT)	LED Module Dimension	2.56"L x 0.78"W x 0.39"H
Max Mods (Series)	Full 70W load	Fastening	3M VHB double face tape and mechanical mounting options.
Viewing Angle	120°	Optical Structure	UV or IR Protected
CT	7500K	Packaging	100 modules per tray, 5 trays per case
CRI	>70	Protection Grade	IP68 wet-Location
LEDs Per Module	3	Certifications	UL and cUL Recognized
Operating Temp	-40° to +60°C	Warranty	5 Years
LEDs Lifetime	L70 rating of 50,000 hours		

## LED MODULE PRODUCT OPTIONS LIST

Model	Voltage	Power	Current	Modules Per Ft	CT	Lumens	Qty 60W Power Supply	Viewing Angle
Aurora I Gen IV	12VDC	0.70W/Module	58mA	3	7500K	195 Lm/Ft	84Modules/28Ft	120°

## LED MODULE DIMENSIONS

