


# AURORA III Gen I

## New Generation Aurora Series

G2G's new generation Aurora III Gen I LED modules are innovatively designed as an optimal solution for outdoor and indoor lighting. Ideal for channel letters, illuminated light boxes, and decorative architectural lighting.

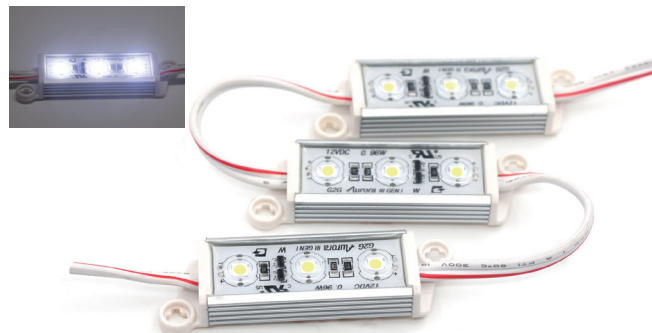

**cULus** **IP68**  
E344189

### RECOMMENDED COVERAGE CHART

Depth	5"	6"	7"	8"
Spacing	6"	7"	8"	9"

### LED MODULE SPECIFICATIONS

Working mode	Constant Current Technology (CCT)	LED Module Dimension	2.56"L x 0.78"W x 0.39"H
Viewing Angle	120°	Fastening	3M VHB double face tape and mechanical mounting options.
CT	7500K	Optical Structure	UV or IR Protected
CRI	>70	Packaging	100 modules per tray, 5 trays per case
LEDs Per Module	3	Protection Grade	IP68 wet-Location
Operating Temp	-40° to +60°C	Certifications	UL and cUL Recognized
LEDs Lifetime	L70 rating of 50,000 hours	Warranty	5 Years

### LED MODULE PRODUCT OPTIONS LIST

Model	Voltage	Power	Current	Modules Per Ft	CT	Lumens	Qty 60W Power Supply	Viewing Angle
Aurora III Gen I	12VDC	0.96W/Module	80mA	3	7500K	300 Lm/Ft	60Modules/20Ft	120°

### LED MODULE DIMENSIONS

