



# LED ShoeBox Light

Fixture replaces conventional shoebox lamp



Phone:(973)575-2600 Fax:(973)575-2603  
155A 10th St Passaic,NJ 07055  
[www.g2glighting.com](http://www.g2glighting.com)

# LED ShoeBox Light

Fixture replaces conventional shoebox lamp



## LED ShoeBox Light G2G40W

### Electrical Specifications




Model No.	G2G-40W
Nominal Wattage	40W
Nominal Voltage	90-305VAC, 50/60Hz 277-480VAC, 50/60Hz
Maximum Current	AC 0.45A (max)
Power Factor (PF)	>0.95
Driver Efficiency	>90%

### Photometric Specifications

Luminous Flux	+Lumen tolerance +/- 5% 4,000-4,400lm
CRI	Ra>75
CCT	3000-6500K
Optional Beam Angle	30°/60°/90°/100°/120°

### Mechanical Specifications

IP&IK Rating	IP65 (IP67 optional) & IK10
Lifetime	62000 hours - L70, @25°C
Heat Radiator	Anodized Aluminum
Lens	PC
Fixture Dimension	304*151*183mm 11.9*5.9*7.2 inches
Net Weight	3.3kg
Carton Dimension	390*240*260mm
Gross Weight	3.9kg

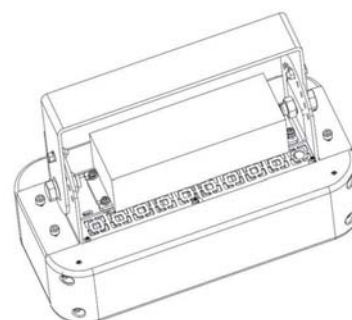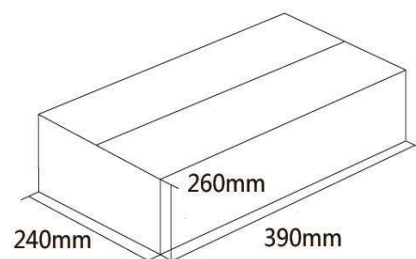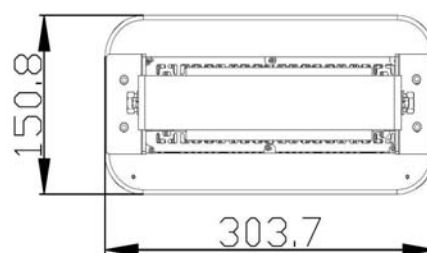

# LED ShoeBox Light

Fixture replaces conventional shoebox lamp



## LED ShoeBox Light G2G80W

### Electrical Specifications




Model No.	G2G-80W
Nominal Wattage	80W
Nominal Voltage	90-305VAC, 50/60Hz 277-480VAC, 50/60Hz
Maximum Current	AC 0.9A (max)
Power Factor (PF)	>0.95
Driver Efficiency	>92%

### Photometric Specifications

Luminous Flux	+Lumen tolerance +/- 5% 8,000-8,800lm
CRI	Ra>75
CCT	3000-6500K
Optional Beam Angle	30°/60°/90°/100°/120°

### Mechanical Specifications

IP&IK Rating	IP65 (IP67 optional) & IK10
Lifetime	62000 hours - L70, @25°C
Heat Radiator	Anodized Aluminum
Lens	PC
Fixture Dimension	304*232*183mm 11.9*9.1*7.2 inches
Net Weight	4.8kg
Carton Dimension	390*320*260mm
Gross Weight	5.7kg

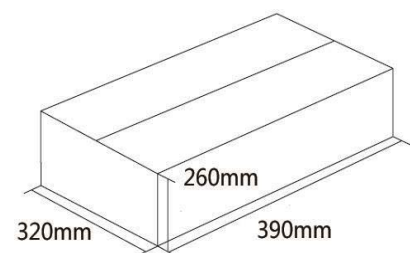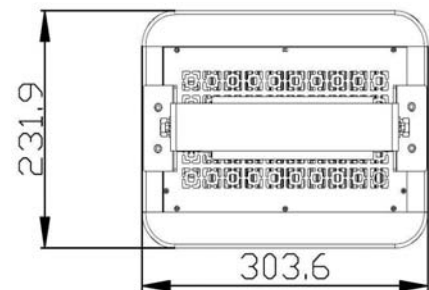

# LED ShoeBox Light

Fixture replaces conventional shoebox lamp



## Electrical Specifications

Model No.	G2G-120W
Nominal Wattage	120W
Nominal Voltage	90-305VAC, 50/60Hz 277-480VAC, 50/60Hz
Maximum Current	AC 1.35A (max)
Power Factor (PF)	>0.95
Driver Efficiency	>93%




## Photometric Specifications

Luminous Flux	+Lumen tolerance +/- 5% 12,000-13,200lm
CRI	Ra>75
CCT	3000-6500K
Optional Beam Angle	30°/60°/90°/100°/120°

## Mechanical Specifications

IP&IK Rating	IP65 (IP67 optional) & IK10
Lifetime	62000 hours - L70, @25°C
Heat Radiator	Anodized Aluminum
Lens	PC
Fixture Dimension	304*311*196mm 11.9*12.2*7.7 inches
Net Weight	6.2kg
Carton Dimension	390*390*260mm
Gross Weight	7.3kg

## LED ShoeBox Light G2G120W

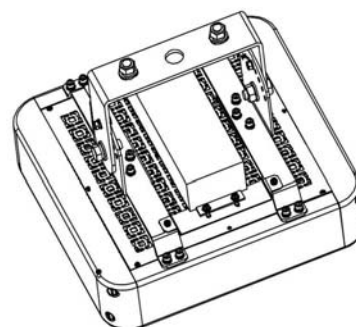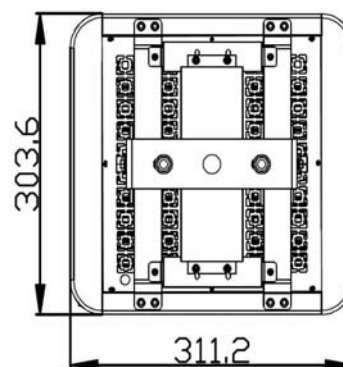



# LED ShoeBox Light

Fixture replaces conventional shoebox lamp



## Electrical Specifications

Model No.	G2G-160W
Nominal Wattage	160W
Nominal Voltage	90-305VAC, 50/60Hz 277-480VAC, 50/60Hz
Maximum Current	AC 1.80A (max)
Power Factor (PF)	>0.95
Driver Efficiency	>93%




## Photometric Specifications

Luminous Flux	+Lumen tolerance +/- 5% 16,000-17,600lm
CRI	Ra>75
CCT	3000-6500K
Optional Beam Angle	30°/60°/90°/100°/120°

## Mechanical Specifications

IP&IK Rating	IP65 (IP67 optional) & IK10
Lifetime	62000 hours - L70, @25°C
Heat Radiator	Anodized Aluminum
Lens	PC
Fixture Dimension	304*392*196mm 11.9*15.4*7.7 inches
Net Weight	7.2kg
Carton Dimension	470*390*260mm
Gross Weight	8.2kg

## LED ShoeBox Light G2G160W

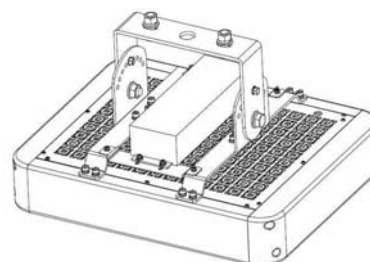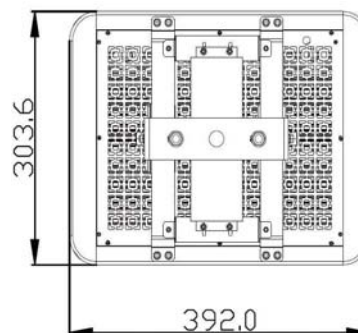

# LED ShoeBox Light

Fixture replaces conventional shoebox lamp



## Electrical Specifications

Model No.	G2G-200W
Nominal Wattage	200W
Nominal Voltage	90-305VAC, 50/60Hz 277-480VAC, 50/60Hz
Maximum Current	AC 2.25A (max)
Power Factor (PF)	>0.95
Driver Efficiency	>93%

## Photometric Specifications

Luminous Flux	+Lumen tolerance +/- 5% 20,000-22,000lm
CRI	Ra>75
CCT	3000-6500K
Optional Beam Angle	30°/60°/90°/100°/120°

## Mechanical Specifications

IP&IK Rating	IP65 (IP67 optional) & IK10
Lifetime	62000 hours - L70, @25°C
Heat Radiator	Anodized Aluminum
Lens	PC
Fixture Dimension	304*473*196mm 11.9*18.6*7.7 inches
Net Weight	8.6kg
Carton Dimension	560*390*260mm
Gross Weight	9.7kg

## LED ShoeBox Light G2G200W

