

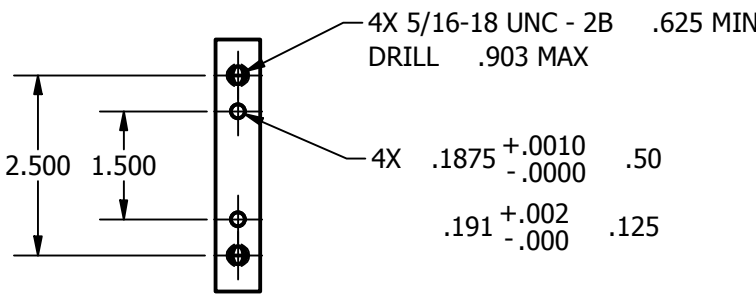
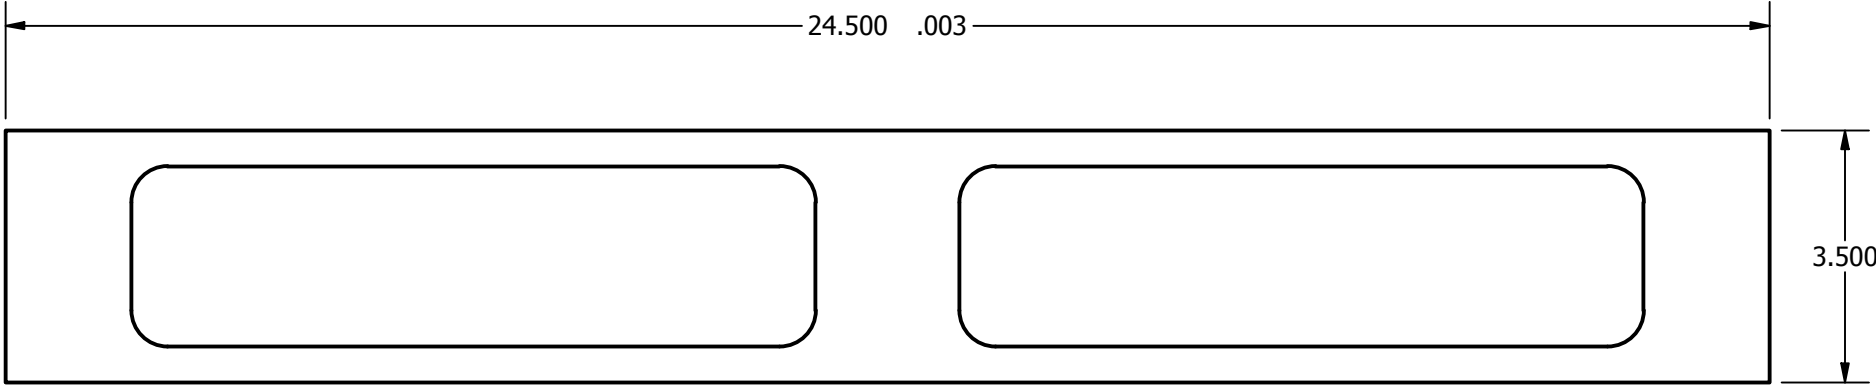
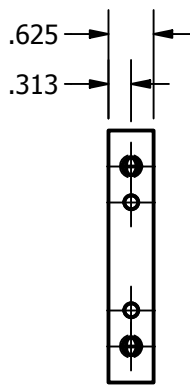
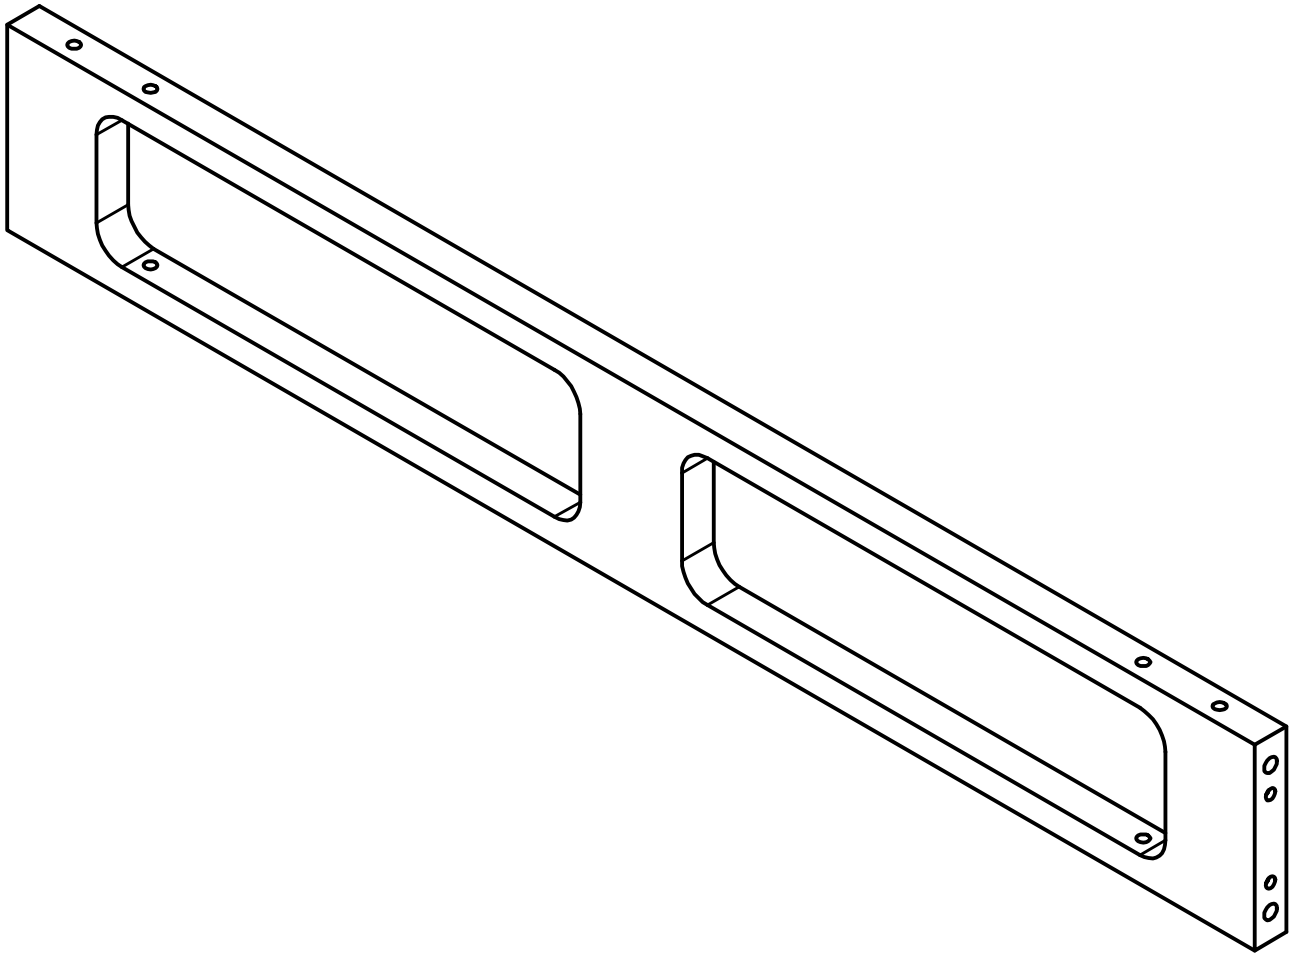


- GENERAL NOTES:
1. MATERIAL: **ALUMINUM, 6061-T651**
 2. SPECIAL FINISH: **ANODIZE PER MIL-A-8625F, TYPE II, CLASS 2 (BLACK)**
 3. SURFACE ROUGHNESS (UNLESS SPECIFIED OTHERWISE): **63 Ra** (AVERAGE MICRO-INCHES)
 4. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994
 5. DEBURR AND BREAK ALL SHARP EDGES, MAX 0.010" (UNLESS SPECIFIED OTHERWISE)
 6. PARTS ARE TO BE CLEAN AND FREE OF OIL, GREASE, AND OTHER CONTAMINANTS
 7. DIMENSIONS INCLUDE ANODIZING, ELECTROPLATING, AND CHEMICALLY APPLIED FINISHES IF APPLICABLE



8X 1/4-20 UNC - 2B .500 MIN
DRILL .750 MAX
4 NEAR SIDE
4 FAR SIDE

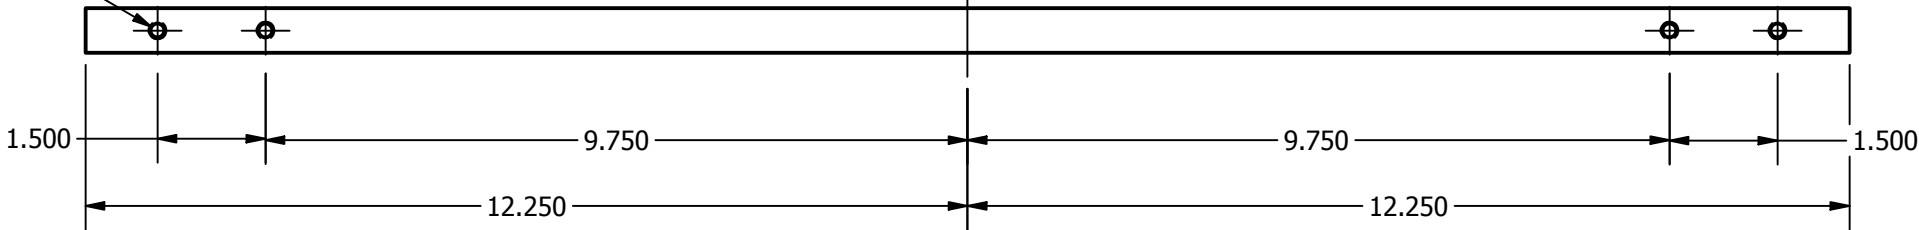

(UNLESS SPECIFIED OTHERWISE) PRIMARY UNITS: INCHES [SECONDARY UNITS]: MILLIMETERS	
PRIMARY TOLERANCES:	
X.X	± 0.020
X.XX	± 0.010
X.XXX	± 0.005
X.XXXX	± 0.0005
ANGULAR	± 0.5 DEG
- DO NOT SCALE DRAWING -	
THIRD ANGLE PROJECTION:	

© 2024 Allen Institute for Neural Dynamics		615 Westlake Ave N Seattle, WA 98109, USA Phone: +1-206-548-7000 www.alleninstitute.org	
NP2 CONNECTOR BAR.ipt			
SIZE C	PART NUMBER J009956	REV -	SHEET 1 OF 1