

### 3 TERMINAL 1A POSITIVE VOLTAGE REGULATORS



#### DESCRIPTION

The UTC78XX series of three-terminal positive regulators are available in TO-220 package and with several fixed output voltage, making them useful in a wide range of application. Each type employs internal current limiting, thermal shut-down and safe area protection, making it essentially indestructible. If adequate heat sinking is provided, they can deliver over 1A output current. Although designed as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltage and currents.

#### FEATURES

- \*Output current up to 1A
- \*5V;6V;8V;9V;10V;12V;15V;18V;24V output voltage available
- \*Thermal overload protection
- \*Short circuit protection
- \*Output transistor SOA protection

#### BLOCK DIAGRAM

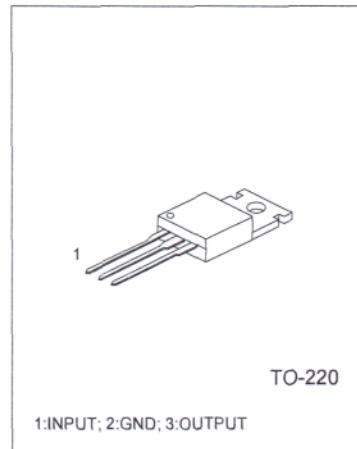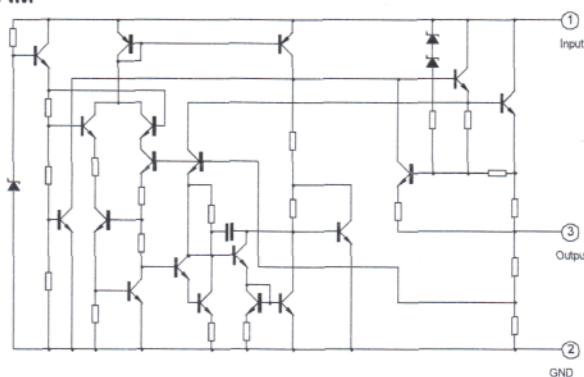

1:INPUT; 2:GND; 3:OUTPUT

#### ABSOLUTE MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ )

Characteristic	Symbol	Value	Unit
Input voltage (for $V_o=5\text{V}$ to $18\text{V}$ ) (for $V_o=24\text{V}$ )	$V_i$	35 40	$\text{V}$ $\text{V}$
Thermal resistance junction-air	$R_{\theta JA}$	65	$^\circ\text{C/W}$
Thermal resistance junction-cases	$R_{\theta JC}$	5	$^\circ\text{C/W}$
Operating Temperature	$T_{opr}$	0 ~ +125	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-65 ~ +150	$^\circ\text{C}$

# UTC78XX

## LINEAR INTEGRATED CIRCUIT

### UTC7805 ELECTRICAL CHARACTERISTICS

(Refer to test circuits,  $0 < T_j < 125^\circ\text{C}$ ,  $I_o = 500\text{mA}$ ,  $V_i = 10\text{V}$ ,  $C_i = 0.33\mu\text{F}$ ,  $C_o = 0.1\mu\text{F}$ , unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	Vo	T <sub>j</sub> =25°C	4.8	5.0	5.2	V
		5.0mA < I <sub>o</sub> < 1.0A, P <sub>o</sub> < 15W V <sub>i</sub> =7V to 20V	4.75	5.00	5.25	V
Line regulation	ΔVo	T <sub>j</sub> =25°C, V <sub>i</sub> =7V to 25V		4.0	100	mV
		T <sub>j</sub> =25°C, V <sub>i</sub> =8V to 12V		1.6	50	mV
Load regulation	ΔVo	T <sub>j</sub> =25°C, I <sub>o</sub> =5.0mA to 1.5A		9	100	mV
		T <sub>j</sub> =25°C, I <sub>o</sub> =250mA to 750mA		4	50	mV
Quiescent current	I <sub>Q</sub>	T <sub>j</sub> =25°C		5.0	8	mA
Quiescent current change	ΔI <sub>Q</sub>	I <sub>o</sub> =5mA to 1.0A		0.03	0.5	mA
		V <sub>i</sub> =7V to 25V		0.3	1.3	mA
Output voltage drift	ΔVo/ΔT	I <sub>o</sub> =5mA		-0.8		mV/°C
Output noise voltage	V <sub>N</sub>	f=10Hz to 100kHz, T <sub>a</sub> =25°C		42		μV
Ripple rejection	RR	f=120Hz, V <sub>i</sub> =8V to 18V	62	73		dB
Dropout voltage	Vo	I <sub>o</sub> =1.0A, T <sub>j</sub> =25°C		2		V
Output resistance	R <sub>O</sub>	f=1kHz		15		mΩ
Short circuit current	I <sub>SC</sub>	V <sub>i</sub> =35V, T <sub>a</sub> =25°C		230		mA
peak current	I <sub>pk</sub>	T <sub>j</sub> =25°C		2.2		A

### UTC7806 ELECTRICAL CHARACTERISTICS

(Refer to test circuits,  $0 < T_j < 125^\circ\text{C}$ ,  $I_o = 500\text{mA}$ ,  $V_i = 11\text{V}$ ,  $C_i = 0.33\mu\text{F}$ ,  $C_o = 0.1\mu\text{F}$ , unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	Vo	T <sub>j</sub> =25°C	5.75	6.00	6.25	V
		5.0mA < I <sub>o</sub> < 1.0A, P <sub>o</sub> < 15W V <sub>i</sub> =8V to 21V	5.7	6.0	6.3	V
Line regulation	ΔVo	T <sub>j</sub> =25°C, V <sub>i</sub> =8V to 25V		5	120	mV
		T <sub>j</sub> =25°C, V <sub>i</sub> =9V to 13V		1.5	60	mV
Load regulation	ΔVo	T <sub>j</sub> =25°C, I <sub>o</sub> =5.0mA to 1.5A		9	130	mV
		T <sub>j</sub> =25°C, I <sub>o</sub> =250mA to 750mA		3	60	mV
Quiescent current	I <sub>Q</sub>	T <sub>j</sub> =25°C		5.0	8	mA
Quiescent current change	ΔI <sub>Q</sub>	I <sub>o</sub> =5mA to 1.0A			0.5	mA
		V <sub>i</sub> =8V to 25V			1.3	mA
Output voltage drift	ΔVo/ΔT	I <sub>o</sub> =5mA		-0.8		mV/°C
Output noise voltage	V <sub>N</sub>	f=10Hz to 100kHz, T <sub>a</sub> =25°C		45		μV
Ripple rejection	RR	f=120Hz, V <sub>i</sub> =9V to 19V	59	75		dB
Dropout voltage	Vo	I <sub>o</sub> =1.0A, T <sub>j</sub> =25°C		2		V
Output resistance	R <sub>O</sub>	f=1kHz		19		mΩ
Short circuit current	I <sub>SC</sub>	V <sub>i</sub> =35V, T <sub>a</sub> =25°C		250		mA
peak current	I <sub>pk</sub>	T <sub>j</sub> =25°C		2.2		A



**UTC7808 ELECTRICAL CHARACTERISTICS**(Refer to test circuits,  $0 < T_j < 125^\circ\text{C}$ ,  $I_o = 500\text{mA}$ ,  $V_i = 14\text{V}$ ,  $C_i = 0.33\mu\text{F}$ ,  $C_o = 0.1\mu\text{F}$ , unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	$V_o$	$T_j=25^\circ\text{C}$ $5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $V_i=10.5\text{V}$ to $23\text{V}$	7.7	8.0	8.3	V
			7.6	8.0	8.4	V
Line regulation	$\Delta V_o$	$T_j=25^\circ\text{C}, V_i=10.5\text{V}$ to $25\text{V}$		5.0	160	mV
		$T_j=25^\circ\text{C}, V_i=11.5\text{V}$ to $17\text{V}$		2.0	80	mV
Load regulation	$\Delta V_o$	$T_j=25^\circ\text{C}, I_o=5.0\text{mA}$ to $1.5\text{A}$		10	160	mV
		$T_j=25^\circ\text{C}, I_o=250\text{mA}$ to $750\text{mA}$		5.0	80	mV
Quiescent current	$I_Q$	$T_j=25^\circ\text{C}$		5.0	8	mA
Quiescent current change	$\Delta I_Q$	$I_o=5\text{mA}$ to $1.0\text{A}$		0.05	0.5	mA
		$V_i=11.5\text{V}$ to $25\text{V}$		0.5	1.0	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o=5\text{mA}$		-0.8		$\text{mV}/^\circ\text{C}$
Output noise voltage	$V_N$	$f=10\text{Hz}$ to $100\text{kHz}, T_a=25^\circ\text{C}$		52		$\mu\text{V}$
Ripple rejection	$RR$	$f=120\text{Hz}, V_i=11.5\text{V}$ to $21.5\text{V}$	56	73		dB
Dropout voltage	$V_o$	$I_o=1.0\text{A}, T_j=25^\circ\text{C}$		2		V
Output resistance	$R_o$	$f=1\text{kHz}$		17		$\text{m}\Omega$
Short circuit current	$I_{sc}$	$V_i=35\text{V}, T_a=25^\circ\text{C}$		230		mA
peak current	$I_{pk}$	$T_j=25^\circ\text{C}$		2.2		A

**UTC7809 ELECTRICAL CHARACTERISTICS**(Refer to test circuits,  $0 < T_j < 125^\circ\text{C}$ ,  $I_o = 500\text{mA}$ ,  $V_i = 15\text{V}$ ,  $C_i = 0.33\mu\text{F}$ ,  $C_o = 0.1\mu\text{F}$ , unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	$V_o$	$T_j=25^\circ\text{C}$ $5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $V_i=11.5\text{V}$ to $24\text{V}$	8.65	9.00	9.35	V
			8.6	9.0	9.4	V
Line regulation	$\Delta V_o$	$T_j=25^\circ\text{C}, V_i=11.5\text{V}$ to $25\text{V}$		6	180	mV
		$T_j=25^\circ\text{C}, V_i=12\text{V}$ to $25\text{V}$		2	90	mV
Load regulation	$\Delta V_o$	$T_j=25^\circ\text{C}, I_o=5.0\text{mA}$ to $1.5\text{A}$		12	180	mV
		$T_j=25^\circ\text{C}, I_o=250\text{mA}$ to $750\text{mA}$		4	90	mV
Quiescent current	$I_Q$	$T_j=25^\circ\text{C}$		5.0	8	mA
Quiescent current change	$\Delta I_Q$	$I_o=5\text{mA}$ to $1.0\text{A}$		0.5		mA
		$V_i=11.5\text{V}$ to $26\text{V}$			1.3	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o=5\text{mA}$		-1		$\text{mV}/^\circ\text{C}$
Output noise voltage	$V_N$	$f=10\text{Hz}$ to $100\text{kHz}, T_a=25^\circ\text{C}$		58		$\mu\text{V}$
Ripple rejection	$RR$	$f=120\text{Hz}, V_i=13\text{V}$ to $23\text{V}$	56	71		dB
Dropout voltage	$V_o$	$I_o=1.0\text{A}, T_j=25^\circ\text{C}$		2		V
Output resistance	$R_o$	$f=1\text{kHz}$		15		$\text{m}\Omega$
Short circuit current	$I_{sc}$	$V_i=35\text{V}, T_a=25^\circ\text{C}$		250		mA
peak current	$I_{pk}$	$T_j=25^\circ\text{C}$		2.2		A

# UTC78XX

## LINEAR INTEGRATED CIRCUIT

### UTC7810 ELECTRICAL CHARACTERISTICS

(Refer to test circuits,  $0 < T_j < 125^\circ\text{C}$ ,  $I_o = 500\text{mA}$ ,  $V_i = 16\text{V}$ ,  $C_i = 0.33\mu\text{F}$ ,  $C_o = 0.1\mu\text{F}$ , unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	Vo	$T_j = 25^\circ\text{C}$	9.6	10	10.4	V
		$5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $V_i = 12.5\text{V}$ to $25\text{V}$	9.5	10	10.5	V
Line regulation	$\Delta V_o$	$T_j = 25^\circ\text{C}, V_i = 12.5\text{V}$ to $25\text{V}$		10	200	mV
		$T_j = 25^\circ\text{C}, V_i = 13\text{V}$ to $20\text{V}$		3	100	mV
Load regulation	$\Delta V_o$	$T_j = 25^\circ\text{C}, I_o = 5.0\text{mA}$ to $1.5\text{A}$		12	200	mV
		$T_j = 25^\circ\text{C}, I_o = 250\text{mA}$ to $750\text{mA}$		4	100	mV
Quiescent current	$I_Q$	$T_j = 25^\circ\text{C}$		5.0	8	mA
Quiescent current change	$\Delta I_Q$	$I_o = 5\text{mA}$ to $1.0\text{A}$			0.5	mA
		$V_i = 12.5\text{V}$ to $29\text{V}$			1.0	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		-1		$\text{mV}/^\circ\text{C}$
Output noise voltage	$V_N$	$f = 10\text{Hz}$ to $100\text{kHz}, T_a = 25^\circ\text{C}$		58		$\mu\text{V}$
Ripple rejection	RR	$f = 120\text{Hz}, V_i = 14\text{V}$ to $24\text{V}$	56	71		dB
Dropout voltage	$V_o$	$I_o = 1.0\text{A}, T_j = 25^\circ\text{C}$		2		V
Output resistance	$R_o$	$f = 1\text{kHz}$		17		$\text{m}\Omega$
Short circuit current	$I_{sc}$	$V_i = 35\text{V}, T_a = 25^\circ\text{C}$		250		mA
peak current	$I_{pk}$	$T_j = 25^\circ\text{C}$		2.2		A

### UTC7812 ELECTRICAL CHARACTERISTICS

(Refer to test circuits,  $0 < T_j < 125^\circ\text{C}$ ,  $I_o = 500\text{mA}$ ,  $V_i = 16\text{V}$ ,  $C_i = 0.33\mu\text{F}$ ,  $C_o = 0.1\mu\text{F}$ , unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	Vo	$T_j = 25^\circ\text{C}$	11.5	12.0	12.5	V
		$5.0\text{mA} < I_o < 1.0\text{A}, P_o < 15\text{W}$ $V_i = 14.5\text{V}$ to $27\text{V}$	11.4	12	12.6	V
Line regulation	$\Delta V_o$	$T_j = 25^\circ\text{C}, V_i = 14.5\text{V}$ to $30\text{V}$		10	240	mV
		$T_j = 25^\circ\text{C}, V_i = 16\text{V}$ to $22\text{V}$		3	120	mV
Load regulation	$\Delta V_o$	$T_j = 25^\circ\text{C}, I_o = 5.0\text{mA}$ to $1.5\text{A}$		11	240	mV
		$T_j = 25^\circ\text{C}, I_o = 250\text{mA}$ to $750\text{mA}$		5.0	120	mV
Quiescent current	$I_Q$	$T_j = 25^\circ\text{C}$		5.1	8	mA
Quiescent current change	$\Delta I_Q$	$I_o = 5\text{mA}$ to $1.0\text{A}$			0.5	mA
		$V_i = 14.5\text{V}$ to $30\text{V}$			1.0	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		-1		$\text{mV}/^\circ\text{C}$
Output noise voltage	$V_N$	$f = 10\text{Hz}$ to $100\text{kHz}, T_a = 25^\circ\text{C}$		76		$\mu\text{V}$
Ripple rejection	RR	$f = 120\text{Hz}, V_i = 15\text{V}$ to $25\text{V}$	55	71		dB
Dropout voltage	$V_o$	$I_o = 1.0\text{A}, T_j = 25^\circ\text{C}$		2		V
Output resistance	$R_o$	$f = 1\text{kHz}$		18		$\text{m}\Omega$
Short circuit current	$I_{sc}$	$V_i = 35\text{V}, T_a = 25^\circ\text{C}$		230		mA
peak current	$I_{pk}$	$T_j = 25^\circ\text{C}$		2.2		A

# UTC78XX

## LINEAR INTEGRATED CIRCUIT

### UTC7815 ELECTRICAL CHARACTERISTICS

(Refer to test circuits,  $0 < T_j < 125^\circ\text{C}$ ,  $I_o = 500\text{mA}$ ,  $V_i = 23\text{V}$ ,  $C_i = 0.33\mu\text{F}$ ,  $C_o = 0.1\mu\text{F}$ , unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	$V_o$	$T_j = 25^\circ\text{C}$ $5.0\text{mA} < I_o < 1.0\text{A}$ , $P_o < 15\text{W}$ $V_i = 17.5\text{V}$ to $30\text{V}$	14.4	15.0	15.6	V
Line regulation	$\Delta V_o$	$T_j = 25^\circ\text{C}$ , $V_i = 17.5\text{V}$ to $30\text{V}$	14.25	15	15.75	mV
		$T_j = 25^\circ\text{C}$ , $V_i = 20\text{V}$ to $26\text{V}$		3	150	mV
Load regulation	$\Delta V_o$	$T_j = 25^\circ\text{C}$ , $I_o = 5.0\text{mA}$ to $1.5\text{A}$		12	300	mV
		$T_j = 25^\circ\text{C}$ , $I_o = 250\text{mA}$ to $750\text{mA}$		4	150	mV
Quiescent current	$I_Q$	$T_j = 25^\circ\text{C}$		5.2	8	mA
Quiescent current change	$\Delta I_Q$	$I_o = 5\text{mA}$ to $1.0\text{A}$			0.5	mA
		$V_i = 17.5\text{V}$ to $30\text{V}$			1.0	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		-1		$\text{mV}/^\circ\text{C}$
Output noise voltage	$V_N$	$f = 10\text{Hz}$ to $100\text{kHz}$ , $T_a = 25^\circ\text{C}$		90		$\mu\text{V}$
Ripple rejection	RR	$f = 120\text{Hz}$ , $V_i = 18.5\text{V}$ to $28.5\text{V}$	54	70		dB
Dropout voltage	$V_o$	$I_o = 1.0\text{A}$ , $T_j = 25^\circ\text{C}$		2		V
Output resistance	$R_o$	$f = 1\text{kHz}$		19		$\text{m}\Omega$
Short circuit current	$I_{sc}$	$V_i = 35\text{V}$ , $T_a = 25^\circ\text{C}$		250		mA
peak current	$I_{pk}$	$T_j = 25^\circ\text{C}$		2.2		A

### UTC7818 ELECTRICAL CHARACTERISTICS

(Refer to test circuits,  $0 < T_j < 125^\circ\text{C}$ ,  $I_o = 500\text{mA}$ ,  $V_i = 23\text{V}$ ,  $C_i = 0.33\mu\text{F}$ ,  $C_o = 0.1\mu\text{F}$ , unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	$V_o$	$T_j = 25^\circ\text{C}$ $5.0\text{mA} < I_o < 1.0\text{A}$ , $P_o < 15\text{W}$ $V_i = 21\text{V}$ to $33\text{V}$	17.3	18.0	18.7	V
Line regulation	$\Delta V_o$	$T_j = 25^\circ\text{C}$ , $V_i = 21\text{V}$ to $33\text{V}$	17.1	18	18.9	mV
		$T_j = 25^\circ\text{C}$ , $V_i = 24\text{V}$ to $30\text{V}$		5	180	mV
Load regulation	$\Delta V_o$	$T_j = 25^\circ\text{C}$ , $I_o = 5.0\text{mA}$ to $1.5\text{A}$		15	360	mV
		$T_j = 25^\circ\text{C}$ , $I_o = 250\text{mA}$ to $750\text{mA}$		5.0	180	mV
Quiescent current	$I_Q$	$T_j = 25^\circ\text{C}$		5.2	8	mA
Quiescent current change	$\Delta I_Q$	$I_o = 5\text{mA}$ to $1.0\text{A}$			0.5	mA
		$V_i = 21\text{V}$ to $32\text{V}$			1.0	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		-1		$\text{mV}/^\circ\text{C}$
Output noise voltage	$V_N$	$f = 10\text{Hz}$ to $100\text{kHz}$ , $T_a = 25^\circ\text{C}$		110		$\mu\text{V}$
Ripple rejection	RR	$f = 120\text{Hz}$ , $V_i = 22\text{V}$ to $32\text{V}$	53	69		dB
Dropout voltage	$V_o$	$I_o = 1.0\text{A}$ , $T_j = 25^\circ\text{C}$		2		V
Output resistance	$R_o$	$f = 1\text{kHz}$		22		$\text{m}\Omega$
Short circuit current	$I_{sc}$	$V_i = 35\text{V}$ , $T_a = 25^\circ\text{C}$		250		mA
peak current	$I_{pk}$	$T_j = 25^\circ\text{C}$		2.2		A

# UTC78XX

# LINEAR INTEGRATED CIRCUIT

## UTC7824 ELECTRICAL CHARACTERISTICS

(Refer to test circuits,  $0 < T_j < 125^\circ\text{C}$ ,  $I_o = 500\text{mA}$ ,  $V_i = 33\text{V}$ ,  $C_i = 0.33\mu\text{F}$ ,  $C_o = 0.1\mu\text{F}$ , unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Output voltage	$V_o$	$T_j = 25^\circ\text{C}$ $5.0\text{mA} < I_o < 1.0\text{A}$ , $P_o < 15\text{W}$ $V_i = 27\text{V}$ to $38\text{V}$	23	24	25	V
Line regulation	$\Delta V_o$	$T_j = 25^\circ\text{C}$ , $V_i = 27\text{V}$ to $38\text{V}$		17	480	mV
		$T_j = 25^\circ\text{C}$ , $V_i = 30\text{V}$ to $36\text{V}$		6	240	mV
Load regulation	$\Delta V_o$	$T_j = 25^\circ\text{C}$ , $I_o = 5.0\text{mA}$ to $1.5\text{A}$		15	480	mV
		$T_j = 25^\circ\text{C}$ , $I_o = 250\text{mA}$ to $750\text{mA}$		5.0	240	mV
Quiescent current	$I_Q$	$T_j = 25^\circ\text{C}$		5.2	8	mA
Quiescent current change	$\Delta I_Q$	$I_o = 5\text{mA}$ to $1.0\text{A}$		0.5	mA	
		$V_i = 27\text{V}$ to $38\text{V}$		1.0	mA	
Output voltage drift	$\Delta V_o/\Delta T$	$I_o = 5\text{mA}$		-1.5		$\text{mV}/^\circ\text{C}$
Output noise voltage	$V_N$	$f = 10\text{Hz}$ to $100\text{kHz}$ , $T_a = 25^\circ\text{C}$		160		$\mu\text{V}$
Ripple rejection	$RR$	$f = 120\text{Hz}$ , $V_i = 28\text{V}$ to $38\text{V}$	50	67		dB
Dropout voltage	$V_o$	$I_o = 1.0\text{A}$ , $T_j = 25^\circ\text{C}$		2		V
Output resistance	$R_o$	$f = 1\text{kHz}$		28		$\text{m}\Omega$
Short circuit current	$I_{SC}$	$V_i = 35\text{V}$ , $T_a = 25^\circ\text{C}$		230		mA
peak current	$I_{PK}$	$T_j = 25^\circ\text{C}$		2.2		A

## TEST CIRCUITS

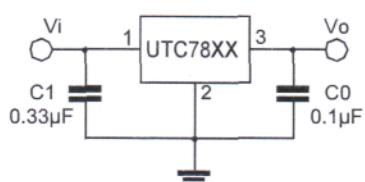


FIG.1 DC PARAMETERS

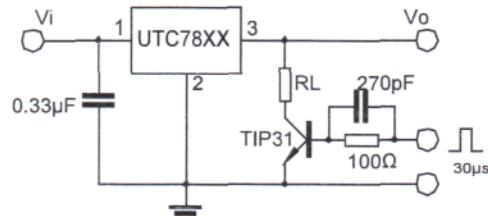


FIG.2 LOAD REGULATION

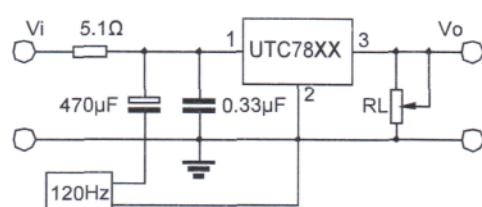


FIG.3 RIPPLE REJECTION



# UTC78XX

# LINEAR INTEGRATED CIRCUIT

## APPLICATION CIRCUITS

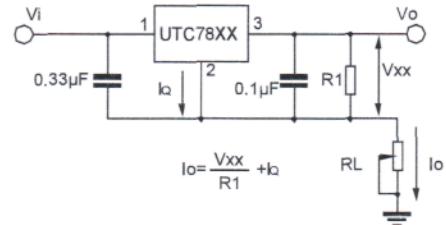



Fig.4 Fixed output regulator

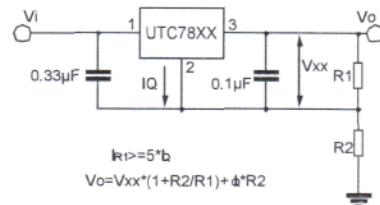


Fig.6 Circuit for increasing Regulator output voltage

Fig.5 Constant current regulator

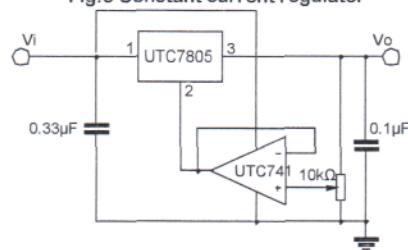


Fig.7 Adjustable output

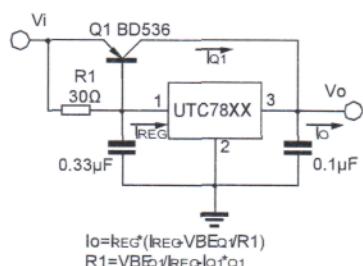


Fig.8 High current with voltage regulator

Fig.9 High output current short circuit protection

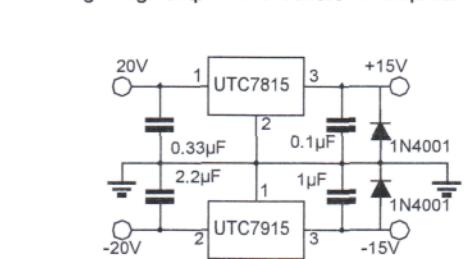


Fig.10 Tracking voltage regulator

Fig.11 Split power supply(±15V,1A)

## UTC78XX

## LINEAR INTEGRATED CIRCUIT

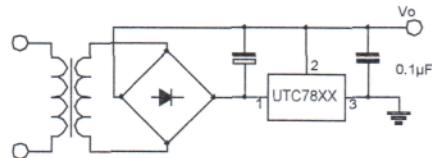


Fig.12 Negative output voltage circuit

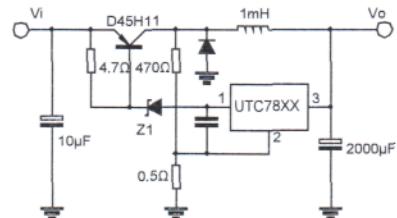


Fig.13 switching regulator

### TYPICAL PERFORMANCE CHARACTERISTICS

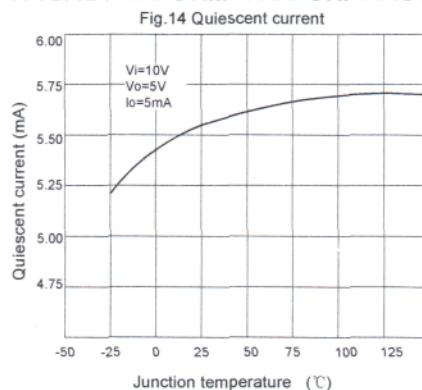


Fig.14 Quiescent current

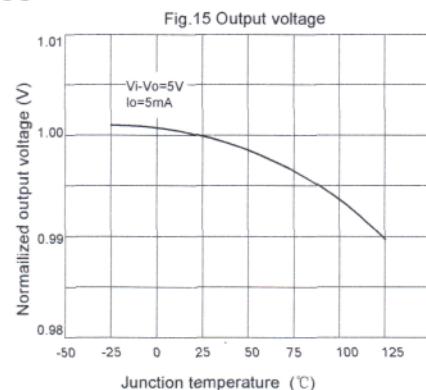


Fig.15 Output voltage

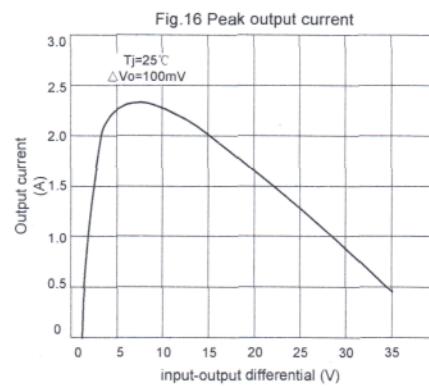


Fig.16 Peak output current

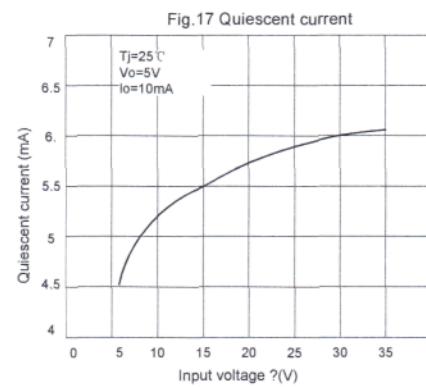


Fig.17 Quiescent current