


110 111
112 113
114 115
003 002
028 029
030 031
001 000
026 027
004 005
006 007
008 108
109 011
DN DP

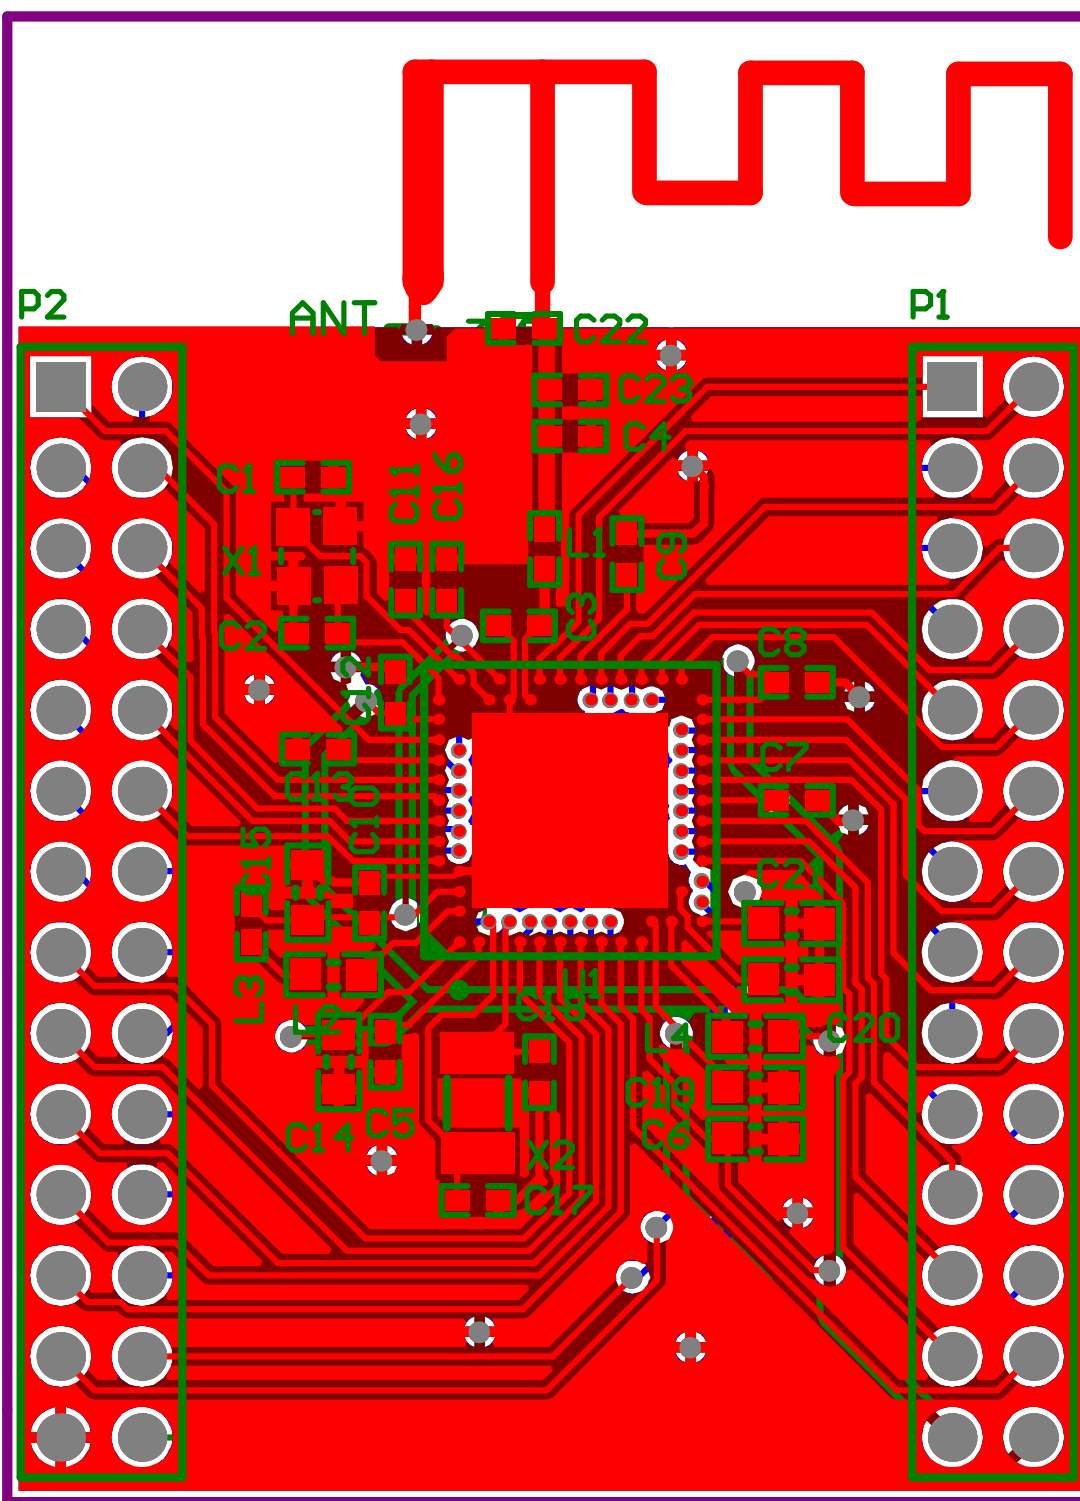

107 106
105 104
103 102
SCK SWD
101 100
025 024
023 022
021 020
019 018
017 016
015 014
013 012

Comment	Description	Designator	Footprint	LibRef	Quantity
12pF	Capacitor, NP0, ?%	C1, C2, C17, C18	CAPC1005X04L	C0402-12p	4
1.0pF	Capacitor, NP0, ? .1pF	C3, C4	CAPC1005X04L	C0402-1.0p	2
100nF	Capacitor, X7R, ?0%	C5, C7, C8, C12	CAPC1005X04L	C0402-100n	4
4.7uf	Capacitor, X7R, ?0%, Capacitor, X7S, ?0%	C6, C19, C20, C21	CAPC1608X06L	C0603-4?-6.3V-X7R, C0603-4?-10V-X7S	4
820pF	Capacitor, NP0, ?%	C9	CAPC1005X04L	C0402-820p	1
N.C.	Not mounted	C10, C13, C22	CAPC1005X04L	C0402-N.C.	3
100pF	Capacitor, NP0, ?%	C11	CAPC1005X04L	C0402-100p	1
1.0UF	Capacitor, X7R, ?0%	C14, C15	CAPC1608X06L	C0603-1?	2
47nF	Capacitor, X7R, ?0%	C16	CAPC1005X04L	C0402-47n	1
1.2pF	Capacitor, NP0, ? .1pF	C23	CAPC1005X04L	C0402-1.2p	1
3.9nH	Inductor, 170mA, ? .1nH	L1	INDC1005X04L	L0402-3n9	1
10uH	Inductor, 80mA, ?0%	L2, L4	INDC1608X06L	L0603-10?	2
15nH	Inductor, 320mA, ?%	L3	INDC1005X04L	L0402-15n	1
MHDR2X14	Header, 14-Pin, Dual row	P1, P2	Header2 14X2	MHDR2X14	2
nRF52840-QIAA	Multi-protocol Bluetooth Low Energy, IEEE 802.15.4, ANT and 2.4GHz proprietary system-on-chip	U1	AQFN50P700X700 X85_HS-74N	nRF52840-QIAAC0	1
32MHz	XTAL SMD 2016, 32MHz, Cl=8pF, Tol: ?0ppm, Stab: ?5ppm	X1	BT-XTAL_2016	XTAL_SMD2016_32MHz_8pF_Golledge	1
32.768kHz	XTAL SMD 2012, 32	X2	XTAL_3215	XTAL_SMD3215_32	1