




To meet the increasingly demanding testing needs of engineers, differential probes have become an indispensable basic equipment for current testing, providing engineers with more accurate testing. The P series small models have been carefully developed and designed by our company, adopting humanized design, dedicated to low voltage, with internal automatic zeroing. The testing accuracy is 1%, and can be compatible with any brand of oscilloscope

Application

- Floating ground voltage measurement
- Switching Power Supply Design
- Inverted, UPS power supply
- Frequency converter
- Electronic ballast design
- Induction heating, induction cooker
- Electrical Experiment
- Experiments in Power Electronics and Power Transmission, etc

Mode	P1058A	P1108B
Bandwidth	DC-50MHz	DC-100MHz
Attenuation ratio	1:100/10	
Error	±1%	
Input impedance	4MΩ/1.25pF	
Rise time	7ns	
Output	7v	
Offset	<±5mV	
Oscilloscope input impedance	1MΩ	
Common mode mutual exclusion ratio	-80dB@60Hz,-50dB@100kHz	
Maximum input AC voltage	800V@1/100 80V@1/10	
Input DC voltage	400V@1/100 40@1/10	
size	165*69*26mm	
Mode	P10515A	P11015A
Bandwidth	DC-50MHz	DC-100MHz
Attenuation ratio	1:1000/100	
Error	±1%	
Input impedance	8MΩ/1pF	
Rise time	7ns	3.5ns
Output	7v	
Offset	<±5mV	
Oscilloscope input impedance	1MΩ	
Common mode mutual exclusion ratio	-80dB@60Hz,-50dB@100kHz	
Maximum input AC voltage	1500V@1/1000 150V@1/100	
Input DC voltage	750V@1/1000 75@1/100	
size	165*69*26mm	
Mode	P10530A	P11030B
Bandwidth	DC-50MHz	DC-100MHz
Attenuation ratio	1:1000/100	
Error	±1%	
Input impedance	8MΩ/1pF	
Rise time	7ns	3.5ns
Output	7v	
Offset	<±5mV	
Oscilloscope input impedance	1MΩ	
Common mode mutual exclusion ratio	-80dB@60Hz,-50dB@100kHz	
Maximum input AC voltage	3000V@1/1000 300V@1/100	
Input DC voltage	1500V@1/1000 150@1/100	
size	165*69*26mm	

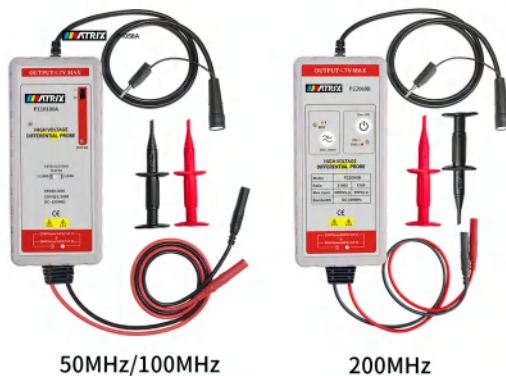

The P series of high-precision active differential probes has a frequency range of 50M-200MHz and a testing accuracy of 1%. It is equipped with automatic zeroing and supports power adapters or battery power supply. The BNC interface is compatible with any brand of oscilloscope and is suitable for high-power testing, research and development, and maintenance. It has become a highly recommended product for many oscilloscope manufacturers, power supply manufacturers, and university research institutes.

Application

- Floating ground voltage measurement
- Switching Power Supply Design
- Inverted, UPS power supply
- Frequency converter
- Electronic ballast design
- Induction heating, induction cooker
- Electrical Experiment
- Experiments in Power Electronics and Power Transmission, etc

Mode	P10570A		P10570B	P105140B	
Bandwidth			DC-50MHz		
Attenuation ratio			1:1000/100		
Error	±1%		±0.5%(DC-50Hz~1kHz)		±0.5%(DC-50Hz~1kHz)
Input impedance	24MΩ/2pF		36MΩ/1pF		36MΩ/1pF
Rise time			7ns		
Output			7v		
Offset			< ±5mV		
Oscilloscope input impedance			1MΩ		
Common mode mutual exclusion ratio			-80dB@60kHz,-50dB@100kHz		
Maximum input AC voltage	7000V@1/1000 700V@1/100		7000V@1/1000 700V@1/100		14kV@1/1000 1.4kV@1/100
Input DC voltage	3500V@1/1000 350V@1/100		3500V@1/1000 350V@1/100		7000V@1/1000 700V@1/100
size			186*84*38mm		
Mode	P11015B		P11070B	P110100A	P110140A
Bandwidth	DC-100MHz		DC-100MHz		
Attenuation ratio	1:50/500		1:1000/100		
Error	±1%		±1%		
Input impedance	8MΩ/1pF		24MΩ/2pF		
Rise time			3.5ns		
Output			7v		
Offset			< ±5mV		
Oscilloscope input impedance			1MΩ		
Common mode mutual exclusion ratio			-80dB@60kHz,-50dB@100kHz		
Maximum input AC voltage	1500V@1/500 150V@1/50	7000V@1/1000 700V@1/100	10kV@1/1000 1kV@1/100	14kV@1/1000 1.4kV@1/100	
Input DC voltage	750V@1/500 75V@1/50	3500V@1/1000 350V@1/100	5000V@1/1000 500V@1/100	7000V@1/1000 700V@1/100	
size			186*84*38mm		
Mode	P22010B		P22020B	P22040B	P22060B
Bandwidth			DC-200MHz(-3dB)		
Attenuation ratio			1:1000/100		
Error			±1%		
Input impedance			12MΩ/1.25pF		
Rise time			5MHz		
Output			7V		
Offset			< ±5mv		
Oscilloscope input impedance			1MΩ		
Common mode mutual exclusion ratio			-80dB@60kHz,-50dB@100kHz		
Maximum input AC voltage	1kV@1/1000 100V@1/100	2kV@1/1000 200V@1/100	4kV@1/1000 400V@1/100	6kV@1/1000 600V@1/100	
Input DC voltage	500V@1/1000 50@1/100	1kV@1/1000 100@1/100	2kV@1/1000 200V@1/100	3kV@1/1000 300@1/100	
size			186*84*38mm		