


SUBMITTAL	ITEM TYPE	TITLE
GATE AUTOMATION	BARRIER GATE OPERATOR	DOORKING 1601


FEATURES

- DESIGNED FOR SINGLE LANE (14 FT MAXIMUM) VEHICULAR CONTROL IN HIGH TRAFFIC APPLICATIONS
- ELECTRONIC LIMIT SETTINGS
- ARM ROTATES 90° IN APPROXIMATELY 2.5 SECONDS
- G90 GALVANIZED STEEL HOUSING
- FAIL-SECURE MECHANICAL RELEASE METHOD
- LEFT- OR RIGHT-HAND MOUNT
- 360° GEAR BOX ROTATION BEFORE THE MOTOR CHANGES DIRECTION.
- ARM ROTATES 90° IN APPROXIMATELY 2.5 SECONDS
- G90 GALVANIZED STEEL HOUSING
- FAIL-SECURE MECHANICAL RELEASE METHOD
- LEFT- OR RIGHT- HAND MOUNT
- 360° GEAR BOX ROTATION BEFORE THE MOTOR CHANGES DIRECTION.
- TEMPERATURE: 10°F to 140°F (-12°C to 62°C)

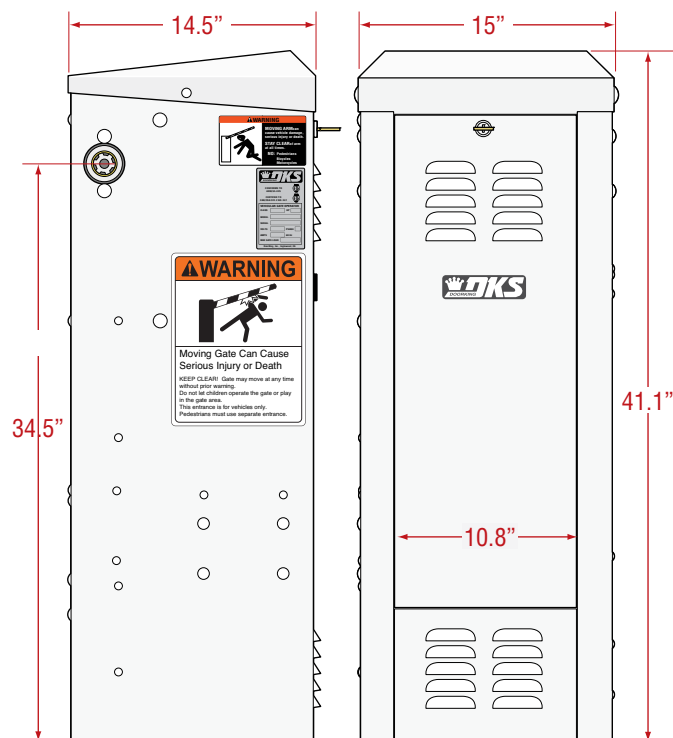

MODEL	1601
CLASS OF OPERATION	II, III, IV
ARM TYPE/MAX LENGTH (ARMS ARE SOLD SEPARATELY)	Plastic / 12 ft (3.6 m) Wood / 14 ft (4.3 m) Round Aluminum / 14 ft (4.3 m) Octagonal Aluminum / 14 ft (4.3 m)
MOTOR	1/2 HP • Continuous Duty • AC Motor
INPUT	115 VAC, 60 Hz, 5.4A 230 VAC, 60 Hz, 2.7A ¹ 460 VAC, 60 Hz, 1.4A ¹
OPTIONS	Convenience Open Package ² Heater and Fan Kits Folding Arm Kits ⁵ Breakaway Arm Kit ³ Octagonal Lighted Signal Arm 2-Piece Arm Kit ⁴

Housing & Arm Cover



2525 NE COLUMBIA BLVD PORTLAND, OR 97211
SERVICE 503.595.4716 | INSIDE SALES 503.946.1261 | TOLL FREE 1.800.813.6772

"SERVING THE PORTLAND/ VANCOUVER METRO AREA SINCE 1984"

SUBMITTAL	ITEM TYPE	TITLE
GATE AUTOMATION	WIRING	DOORKING 1601 WIRING

WIRING

Before attempting to connect any wiring to the operator, be sure that the circuit breaker in the electrical panel is in the OFF position. Permanent wiring must be installed to the operator as required by local electrical codes. It is recommended that a licensed electrical contractor perform this work.

Since building codes vary from city to city, we highly recommend that you check with your local building department prior to installing any permanent wiring to be sure that all wiring to the operator (both high and low voltage) complies with local code requirements.

THIS GATE OPERATOR MUST BE PROPERLY GROUNDED!!

2.1 High Voltage Wire Runs

The distance shown in the chart is measured in “Feet” from the operator to the power source. If power wiring is greater than the maximum distance shown, it is recommended that a service feeder be installed. When large gauge wire is used, a separate junction box must be installed for the operator connection. The wire table is based on stranded copper wire. Wire run calculations are based on the NEC recommended maximum 3% voltage drop on the power line, plus an additional 10% reduction in distance to allow for other losses in the system.

This table illustrates the high voltage AC power wire size and distance limitations.

Model Type	Voltage Required	Amps Required	Wire Size / Max Distance in Feet			
			12 AWG	10 AWG	8 AWG	6 AWG
1601 - 1/2 HP	115	5.7	170	275	460	690
1602 - 1 HP	115	9.7	100	162	270	405

Never run low voltage rated wire insulation in the same conduit as high voltage rated wire insulation.



2525 NE COLUMBIA BLVD PORTLAND, OR 97211
SERVICE 503.595.4716 | INSIDE SALES 503.946.1261 | TOLL FREE 1.800.813.6772

“SERVING THE PORTLAND/ VANCOUVER METRO AREA SINCE 1984”