Lecture 3 — Branch Prediction & Amdahl's Law

Patrick Lam & Jeff Zarnett

p.lam@ece.uwaterloo.ca jzarnett@uwaterloo.ca

Department of Electrical and Computer Engineering
University of Waterloo

December 23, 2017

The compiler (& CPU) take a look at code that results in branch instructions.

Examples: loops, conditionals, or the dreaded `goto`.

It will take an assessment of what it thinks is likely to happen.

In the beginning the CPUs/compilers didn't really think about this sort of thing.

They come across instructions one at a time and do them and that was that.

If one of them required a branch, it was no real issue.

Then we had pipelining...

the CPU would fetch the next instruction while decoding the previous one, and while executing the instruction before.

That means if evaluation of an instruction results in a branch, we might go somewhere else and therefore throw away the contents of the pipeline.

Thus we'd have wasted some time and effort.

If the pipeline is short, this is not very expensive.
   But pipelines keep getting longer...

The compiler and CPU look at instructions on their way to be executed and analyze whether it thinks it's likely the branch is taken.

This can be based on several things, including the recent execution history.

If we guess correctly, this is great, because it minimizes the cost of the branch.

If we guess wrong, we flush the pipeline and take the performance penalty.

The compiler and CPU's branch prediction routines are pretty smart.
Trying to outsmart them isn't necessarily a good idea.

But we can give the compiler (gcc at least) some hints about what we think is likely to happen.

Our tool for this is the `__builtin_expect()` function, which takes two arguments, the value to be tested and the expected result.

In the linux `compiler.h` header there are two neat little shortcuts defined:

```
# define likely(x)      __builtin_expect(!!(x), 1)
# define unlikely(x)    __builtin_expect(!!(x), 0)
```

Compile with at least optimization level 2 (`-O2`) to get the compiler to take these hints at all.

```
#include <stdlib.h>
#include <stdio.h>

static __attribute__ ((noinline)) int f(int a) { return a; }

#define BSIZE 1000000
int main(int argc, char* argv[])
{
  int *p = calloc(BSIZE, sizeof(int));
  int j, k, m1 = 0, m2 = 0;
  for (j = 0; j < 1000; j++) {
    for (k = 0; k < BSIZE; k++) {
      if (__builtin_expect(p[k], EXPECT_RESULT)) {
        m1 = f(++m1);
      } else {
        m2 = f(++m2);
      }
    }
  }

  printf("%d, %d\n", m1, m2);
}
```

Running it yielded:

```
plam@plym:~/459$ gcc -O2 likely-simplified.c -DEXPECT_RESULT=0 -o likely-simplified
plam@plym:~/459$ time ./likely-simplified
0, 1000000000

real 0m2.521s
user 0m2.496s
sys 0m0.000s
plam@plym:~/459$ gcc -O2 likely-simplified.c -DEXPECT_RESULT=1 -o likely-simplified
plam@plym:~/459$ time ./likely-simplified
0, 1000000000

real 0m3.938s
user 0m3.868ss
sys 0m0.000s
```

Hint Results

In the original source the author reports the following results.

Scanning a one million element array, with all elements initially zero, the results are:

- No use of hints: `0:02.68 real, 2.67 user, 0.00 sys`
- Good prediction: `0:02.28 real, 2.28 user, 0.00 sys`
- Bad prediction: `0:04.19 real, 4.18 user, 0.00 sys`

When about one in ten thousand values in the array is nonzero, then it's roughly the "break-even" point for the setup as described.

Conclusion: it's hard to outsmart the compiler. Maybe it's better not to try.

Our main focus is parallelization.

- Most programs have a sequential part and a parallel part; and,

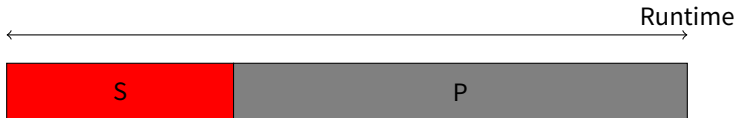- Amdahl's Law answers, "what are the limits to parallelization?"

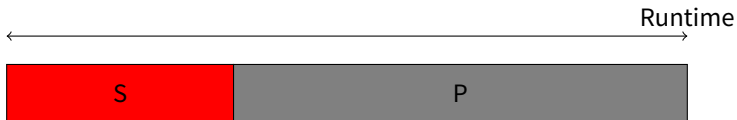*S*: fraction of serial runtime in a serial execution.
P: fraction of parallel runtime in a serial execution.
Therefore, $S + P = 1$.

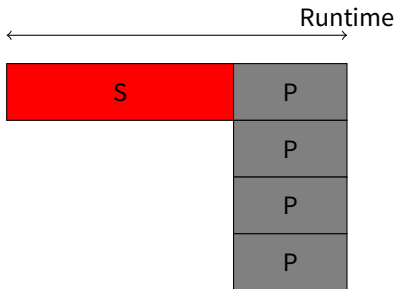With 4 processors, best case, what can happen to the following runtime?

Runtime

S	P

Runtime

S	P

We want to split up the parallel part over 4 processors

Runtime

S	P
	P
	P
	P

T_s: time for the program to run in serial

N: number of processors/parallel executions

T_p: time for the program to run in parallel
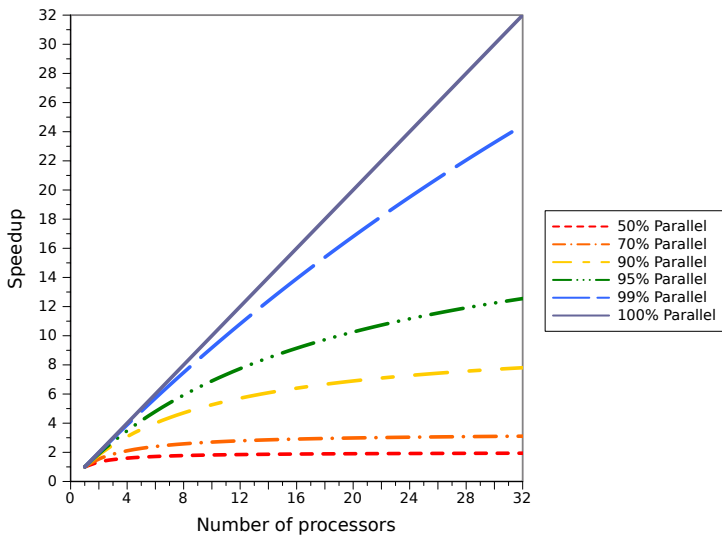
- Under perfect conditions, get N speedup for P

$$T_p = T_s \cdot \left(S + \frac{P}{N}\right)$$

How much faster can we make the program?

$$
\begin{aligned}
speedup &= \frac{T_s}{T_p} \\
&= \frac{T_s}{T_S \cdot (S + \frac{P}{N})} \\
&= \frac{1}{S + \frac{P}{N}}
\end{aligned}
$$

(assuming no overhead for parallelizing; or costs near zero)

Replace S with $(1 - P)$:

$$speedup = \frac{1}{(1-P)+\frac{P}{N}}$$

$$maximum\ speedup = \frac{1}{(1-P)}, \text{ since } \frac{P}{N} \to 0$$

As you might imagine, the asymptotes in the previous graph are bounded by the maximum speedup.

Suppose: a task that can be executed in 5 s, containing a parallelizable loop.

Initialization and recombination code in this routine requires 400 ms.

So with one processor executing, it would take about 4.6 s to execute the loop.

Split it up and execute on two processors: about 2.3 s to execute the loop.

Add to that the setup and cleanup time of 0.4 s and we get a total time of 2.7 s.

Completing the task in 2.7 s rather than 5 s represents a speedup of about 46%.

Applying this formula to the example:

Processors	Run Time (s)
1	5
2	2.7
4	1.55
8	0.975
16	0.6875
32	0.54375
64	0.471875
128	0.4359375

1. Diminishing returns as we add more processors.

2. Converges on 0.4 s.

The most we could speed up this code is by a factor of $\frac{5}{0.4} \approx 12.5$.

But that would require infinite processors (and therefore infinite money).

We assume:

- problem size is fixed (we'll see this soon);
- program/algorithm behaves the same on 1 processor and on N processors;
- that we can accurately measure runtimes—
  i.e. that overheads don't matter.

The program may have many parts, each of which we can tune to a different degree.

Let's generalize Amdahl's Law.

$f_1, f_2, \ldots, f_n$: fraction of time in part n

$S_{f_1}, S_{f_n}, \ldots, S_{f_n}$: speedup for part n

$$speedup = \frac{1}{\frac{f_1}{S_{f_1}} + \frac{f_2}{S_{f_2}} + \ldots + \frac{f_n}{S_{f_n}}}$$

Consider a program with 4 parts in the following scenario:

| | | Speedup | |
Part	Fraction of Runtime	Option 1	Option 2
1	0.55	1	2
2	0.25	5	1
3	0.15	3	1
4	0.05	10	1

We can implement either Option 1 or Option 2.
Which option is better?

"Plug and chug" the numbers:

Option 1

$$speedup = \frac{1}{0.55 + \frac{0.25}{5} + \frac{0.15}{3} + \frac{0.05}{5}} = 1.53$$

Option 2

$$speedup = \frac{1}{\frac{0.55}{2} + 0.45} = 1.38$$

Useful to know, don't have to commit to memory:

$$P_{\text{estimated}} = \frac{\frac{1}{speedup} - 1}{\frac{1}{N} - 1}$$

- Quick way to guess the fraction of parallel code
- Use $P_{\text{estimated}}$ to predict speedup for a different number of processors

Important to focus on the part of the program with most impact.

Amdahl's Law:

- estimates perfect performance gains from parallelization (under assumptions); but,

- only applies to solving a fixed problem size in the shortest possible period of time

n: problem size

$S(n)$: fraction of serial runtime for a parallel execution

$P(n)$: fraction of parallel runtime for a parallel execution

$$
\begin{aligned}
T_p &= S(n) + P(n) = 1 \\
T_s &= S(n) + N \cdot P(n)
\end{aligned}
$$

$$
speedup = \frac{T_s}{T_p}
$$

$$speedup = S(n) + N \cdot P(n)$$

Assuming the fraction of runtime in serial part decreases as *n* increases, the speedup approaches *N*.

Yes! Large problems can be efficiently parallelized. (Ask Google.)

Amdahl's Law

Suppose you're travelling between 2 cities 90 km apart. If you travel for an hour at a constant speed less than 90 km/h, your average will never equal 90 km/h, even if you energize after that hour.

Gustafson's Law

Suppose you've been travelling at a constant speed less than 90 km/h. Given enough distance, you can bring your average up to 90 km/h.