


Pin 7 (D0-D7): pins that read and write data

A and K: controlling LCD backlight; K connects to GND, and A to 3.3V. Turn the backlight on and you can see the characters displayed clear in a dim environment

LCD1602 has two operation modes: 4-bit and 8-bit. When the IOs of the MCU are insufficient, you can choose the 4-bit mode, under which only pins D4~D7 are used. After connecting the circuit, you can operate LCD1602 by the Raspberry Pi.

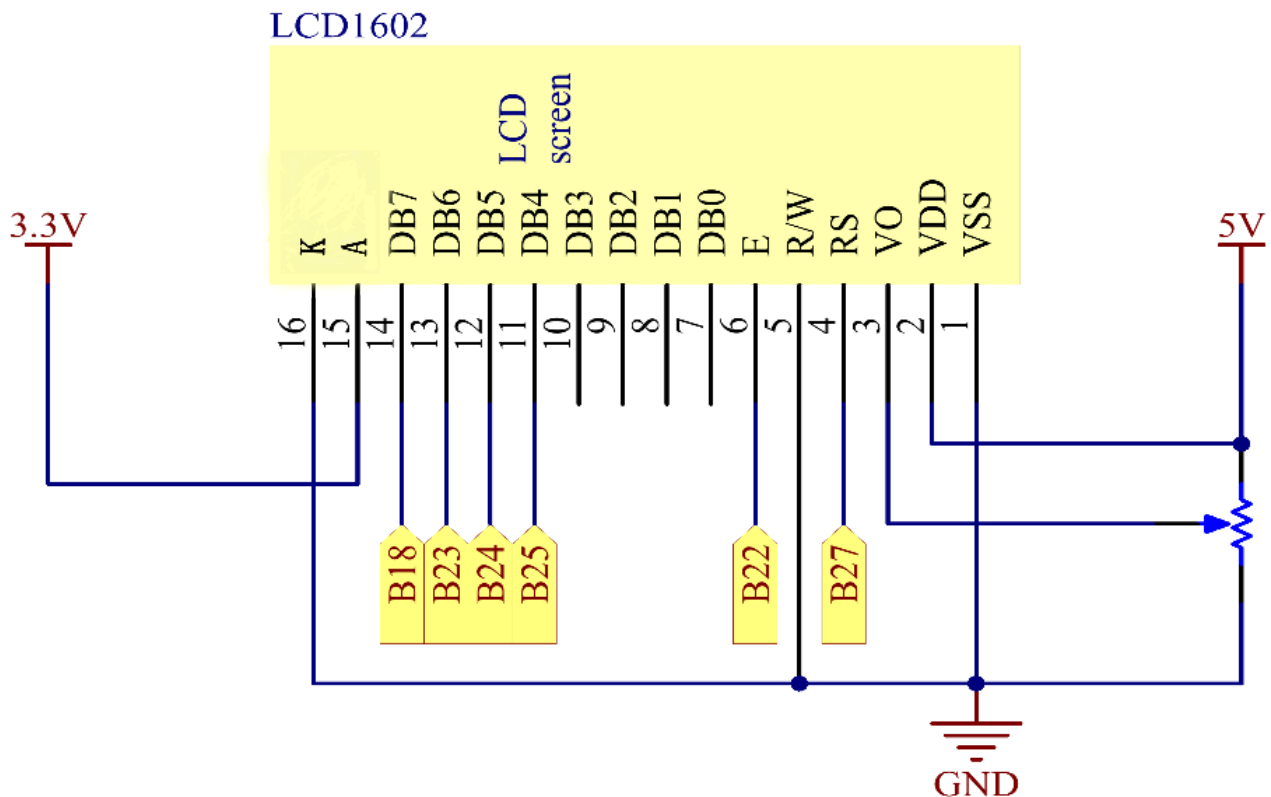

Experimental Procedures

Step 1: Build the circuit (please be sure the pins are connected correctly. Otherwise, characters will not be displayed properly):

LCD1602

T-Extension Board