

1. Description


1.1. Project

Project Name	STM32F103C8
Board Name	INC-AXIS-MAIN
Generated with:	STM32CubeMX 5.2.1
Date	06/18/2019

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103C8Tx
MCU Package	LQFP48
MCU Pin number	48

2. Pinout Configuration

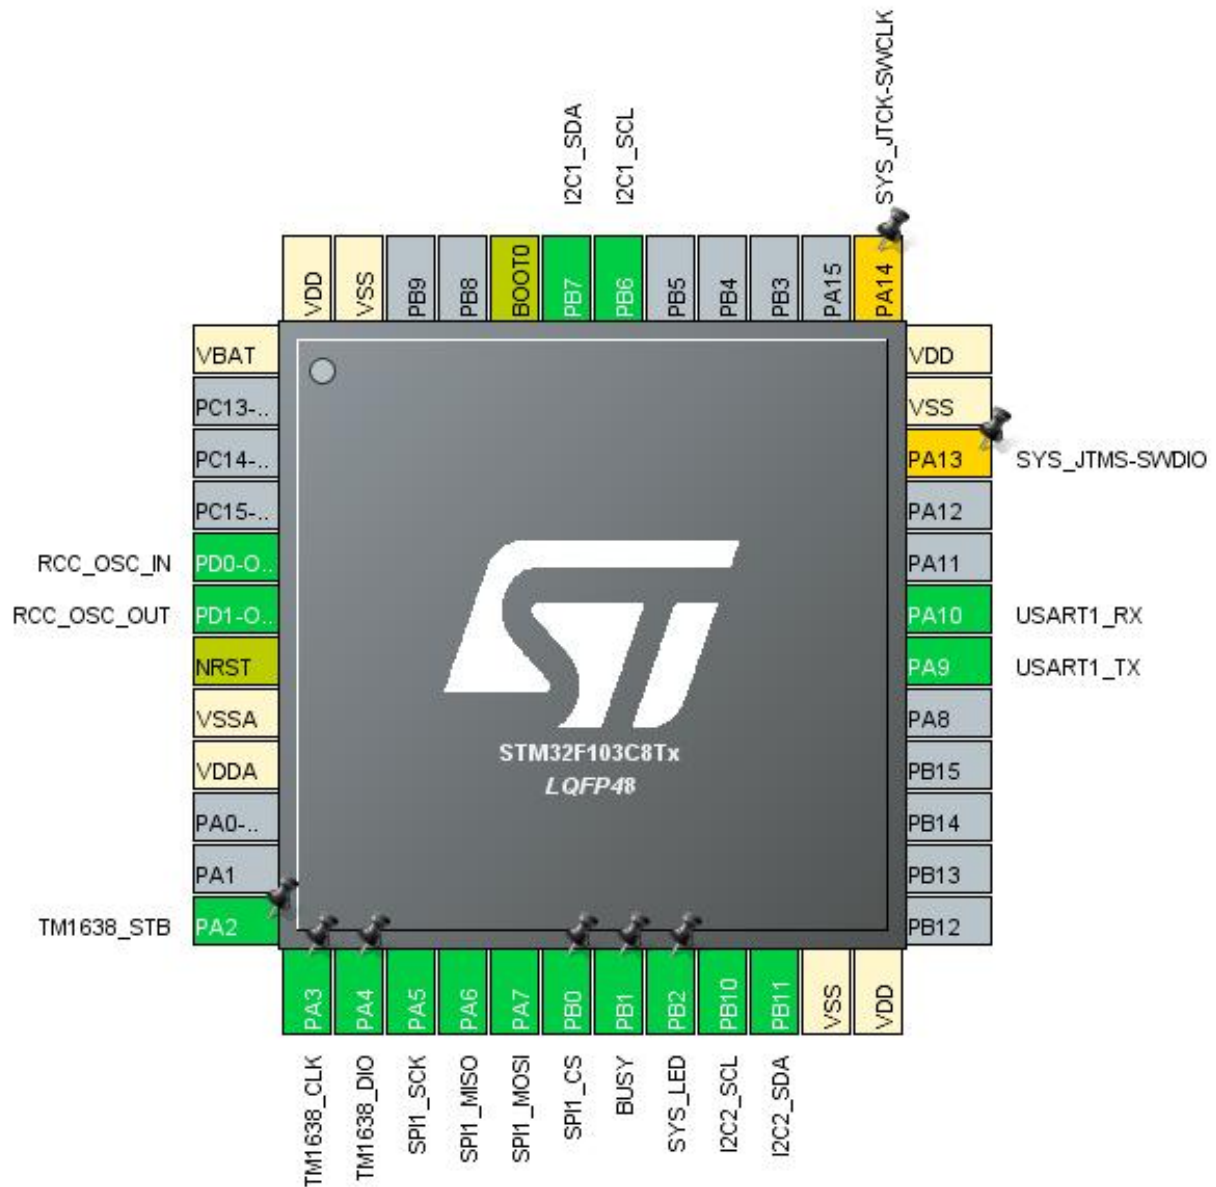


3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
12	PA2 *	I/O	GPIO_Output	TM1638_STB
13	PA3 *	I/O	GPIO_Output	TM1638_CLK
14	PA4 *	I/O	GPIO_Output	TM1638_DIO
15	PA5	I/O	SPI1_SCK	
16	PA6	I/O	SPI1_MISO	
17	PA7	I/O	SPI1_MOSI	
18	PB0 *	I/O	GPIO_Output	SPI1_CS
19	PB1 *	I/O	GPIO_Input	BUSY
20	PB2 *	I/O	GPIO_Output	SYS_LED
21	PB10	I/O	I2C2_SCL	
22	PB11	I/O	I2C2_SDA	
23	VSS	Power		
24	VDD	Power		
30	PA9	I/O	USART1_TX	
31	PA10	I/O	USART1_RX	
34	PA13 **	I/O	SYS_JTMS-SWDIO	
35	VSS	Power		
36	VDD	Power		
37	PA14 **	I/O	SYS_JTCK-SWCLK	
42	PB6	I/O	I2C1_SCL	
43	PB7	I/O	I2C1_SDA	
44	BOOT0	Boot		
47	VSS	Power		
48	VDD	Power		

* The pin is affected with an I/O function

** The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

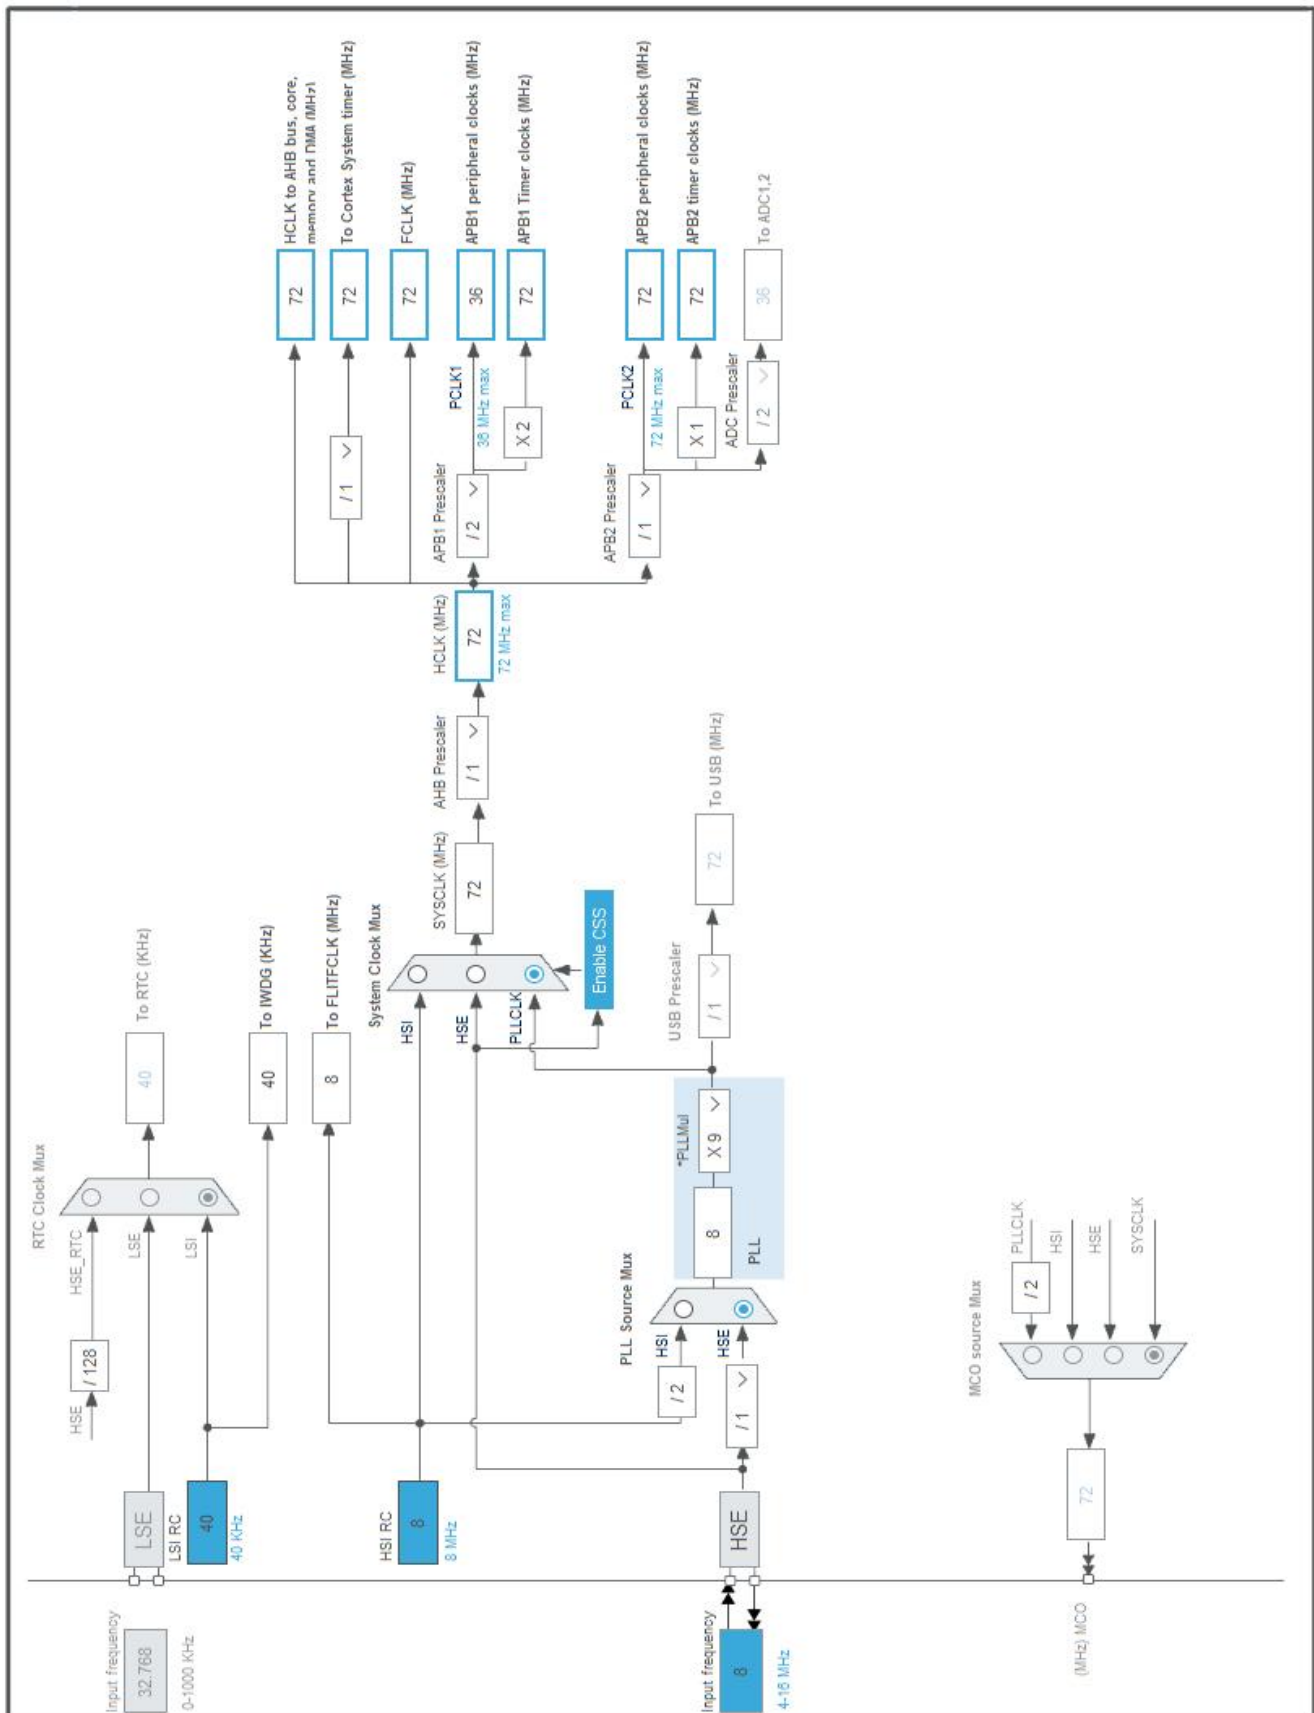

5. Software Project

5.1. Project Settings

Name	Value
Project Name	STM32F103C8
Project Folder	E:\my_project_rt\bsp\stm32f10x-
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F1 V1.6.1

5.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103C8Tx
Datasheet	13587_Rev17

6.2. Parameter Selection

Temperature	25
Vdd	3.3

7. IPs and Middleware Configuration

7.1. I2C1

I2C: I2C

7.1.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

7.2. I2C2

I2C: I2C

7.2.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

7.3. IWDG

mode: Activated

7.3.1. Parameter Settings:

Clocking:

IWDG counter clock prescaler	4
------------------------------	---

IWDG down-counter reload value 4095

7.4. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

7.4.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

7.5. SPI1

Mode: Full-Duplex Master

7.5.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	32 *
Baud Rate	2.25 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

7.6. SYS

Debug: No Debug

Timebase Source: SysTick

7.7. USART1

Mode: Asynchronous

7.7.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

* User modified value

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	n/a	High *	
	PB7	I2C1_SDA	Alternate Function Open Drain	n/a	High *	
I2C2	PB10	I2C2_SCL	Alternate Function Open Drain	n/a	High *	
	PB11	I2C2_SDA	Alternate Function Open Drain	n/a	High *	
RCC	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	n/a	High *	
	PA6	SPI1_MISO	Input mode	No pull-up and no pull-down	n/a	
	PA7	SPI1_MOSI	Alternate Function Push Pull	n/a	High *	
USART1	PA9	USART1_TX	Alternate Function Push Pull	n/a	High *	
	PA10	USART1_RX	Input mode	No pull-up and no pull-down	n/a	
Single Mapped Signals	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
GPIO	PA2	GPIO_Output	Output Push Pull	No pull-up and no pull-down	High *	TM1638_STB
	PA3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	High *	TM1638_CLK
	PA4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	High *	TM1638_DIO
	PB0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	High *	SPI1_CS
	PB1	GPIO_Input	Input mode	Pull-up *	n/a	BUSY
	PB2	GPIO_Output	Output Push Pull	No pull-up and no pull-down	High *	SYS_LED

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
I2C2 event interrupt	unused		
I2C2 error interrupt	unused		
SPI1 global interrupt	unused		
USART1 global interrupt	unused		

* User modified value

9. Software Pack Report