Практическая работа №30

Выполнили: Холоднов В., Наглов В.

1. Подсоединили и настроили устройства

2. Пингуем

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.2

Pinging 192.168.0.2 with 32 bytes of data:

Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```
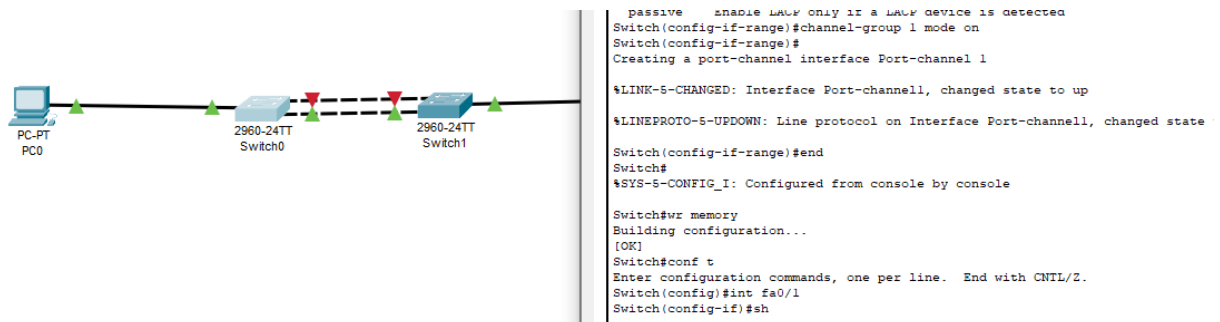
Пинговаться стало быстрее.

3. Отключили один кабель


```
 passive    Enable LACP only if a LACP device is detected
Switch(config-if-range)#channel-group 1 mode on
Switch(config-if-range)#
Creating a port-channel interface Port-channel 1

%LINK-5-CHANGED: Interface Port-channel1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Port-channel1, changed state

Switch(config-if-range)#end
Switch#
%SYS-5-CONFIG_I: Configured from console by console

Switch#wr memory
Building configuration...
[OK]
Switch#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#int fa0/1
Switch(config-if)#sh
```

4. Пинг стал медленее, но потерь нет

```
C:\>ping 192.168.0.2

Pinging 192.168.0.2 with 32 bytes of data:

Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time=6ms TTL=128

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 6ms, Average = 1ms

C:\>
```
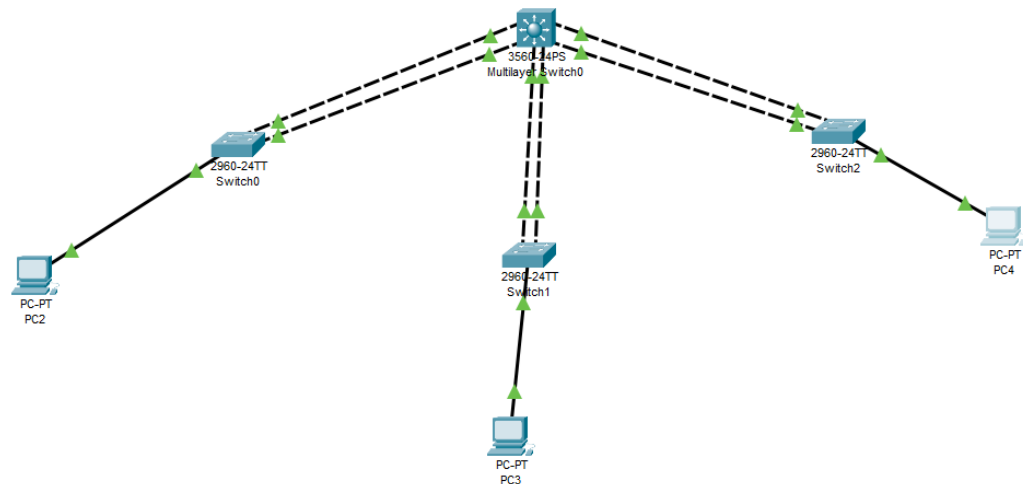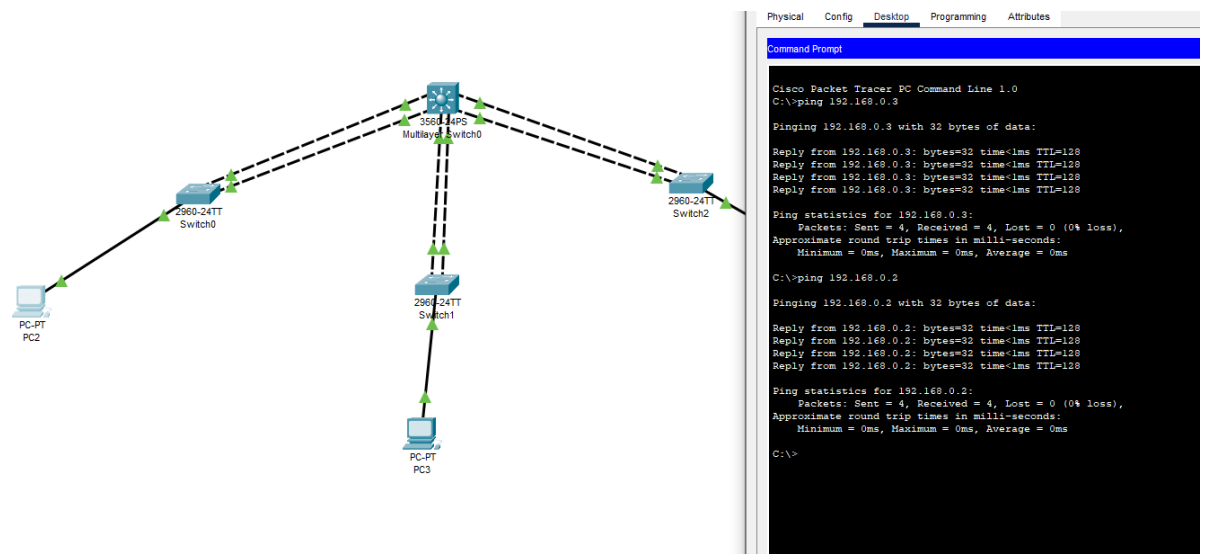
5. Построили новую сеть и настроили устройства

6. Пингуем

7. Все работает!