LAB 2: FREQUENCY DOMAIN AND TRANSFER FUNCTIONS

```
%--------------------------------------
% Fill in your student Name and ID.
Students.Name = 'Seyed Yazdan Zinati';
Students.ID = '260928077';
%--------------------------------------
```

0. Objectives

The purpose of this lab is to overview the basic **MATLAB** functions in linear systems and control. At the end of this lab, you will be able to plot the step and impulse response of a rational transfer function and analyze with first and second order transfer functions.

1. Introduction

The first step in the design of a control system is to identify a mathematical model of the system. Such a mathematical model could be derived either from physical laws or from experimental data. For Linear Time Invariant (LTI) systems, we only need to identify the impulse response or it's frequency-domain representation: the transfer function.

In this lab, we introduce how to model transfer functions in **MATLAB**. There are various methods to define a transfer function in **MATLAB**. As an example, suppose we have a system described by the following constant coefficient linear differential equation:

$$a_2\frac{d^2y(t)}{dt} + a_1\frac{dy(t)}{dt} + a_0y(t) = b_1\frac{du(t)}{dt} + b_0u(t)$$

We know that the transfer function of this system is

$$H(s) = \frac{Y(s)}{U(s)} = \frac{b_1s + b_0}{a_2s^2 + a_1s + a_0}$$

Suppose $a_0 = 2$, $a_1 = 3$, $a_2 = 1$, $a_3 = 1$, $b_0 = 2$, $b_1 = 2$.

The first method of specifying the function is to literally type out this expression. We first define the symbol s using the **tf** function and then define the transfer function H in terms of s. For example:

```
% Assign values to the coefficients
a2 = 1;
a1 = 3;
a0 = 2;
b1 = 2;
b0 = 6;
% Define s symbolically in frequency domain
s = tf('s');
```

Then we can directly define the transfer function as follows.

```
H1 = (b1 * s + b0) / (a2 * s^2 + a1 * s + a0)
```

```
H1 =

     2 s + 6
  -------------
  s^2 + 3 s + 2

Continuous-time transfer function.
```

The second method is to directly specify the polynomials of the numerator and the denominators.

```
% Define the numerator
num = [b1, b0];
% Define the denominator
den = [a2, a1, a0];
% Define the transfer function
H2 = tf(num, den)
```

```
H2 =

     2 s + 6
  -------------
  s^2 + 3 s + 2

Continuous-time transfer function.
```

Another way to define the transfer function is to use the gain, poles and zeros. Let's reconsider the above transfer function in pole-zero form.

$$H(s) = 2\frac{s+2}{(s+1)(s+2)}$$

We can specify the transfer function in the pole zero form using the following code.

```
k = 2; % The gain
z = [-3]; % The set of zeros
p = [-1, -2]; % The set of poles
H3 = zpk(z, p, k) % Define the transfer function
```

```
H3 =

    2 (s+3)
  -----------
  (s+1) (s+2)

Continuous-time zero/pole/gain model.
```

There are other forms of using the **zpk** function. Use **doc zpk** for more information.

It is possible to identify the poles and zeros of a **rational** transfer function using **tf2zp**:

```
[z, p, k] = tf2zp(num, den)
```


```
z = -3
p = 2×1
    -2
```

```
     -1
k = 2
```


2. Plotting Impulse and Step Responses

To plot the impulse response of a transfer function, one can use **`impulse(sys)`**. To plot the step response, one can use **`step(sys)`**. As an example, we plot the impulse and step responses of the system defined in the previous section:

```
T = 10; % Final time value
figure;
impulse(H1, T)
```

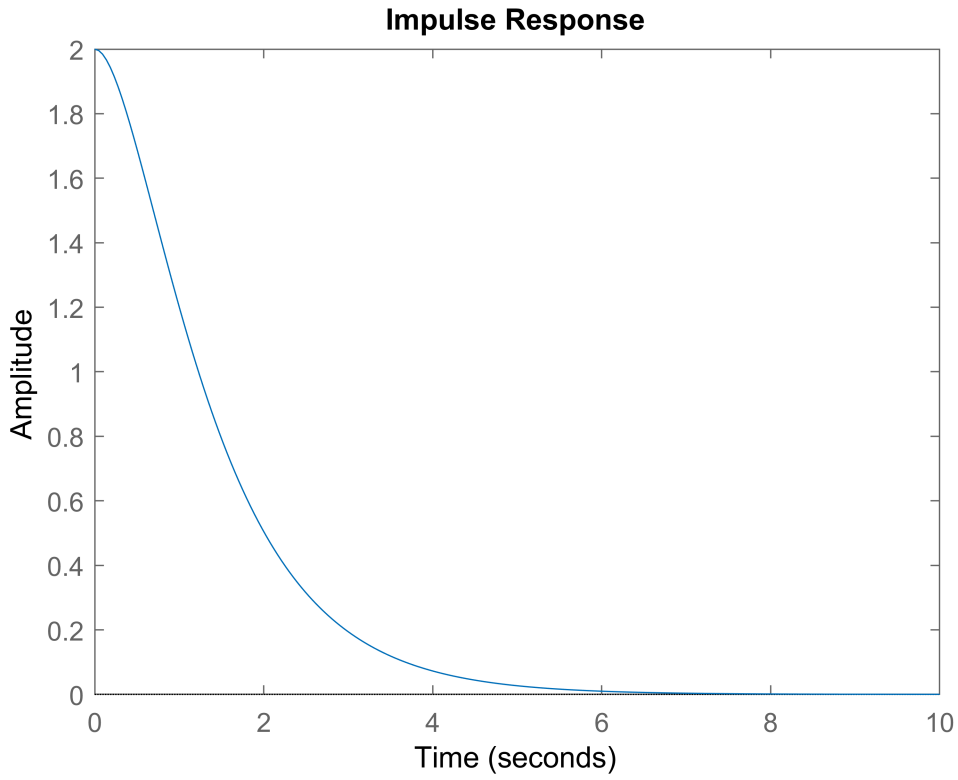


```
figure;
step(H1, T)
```

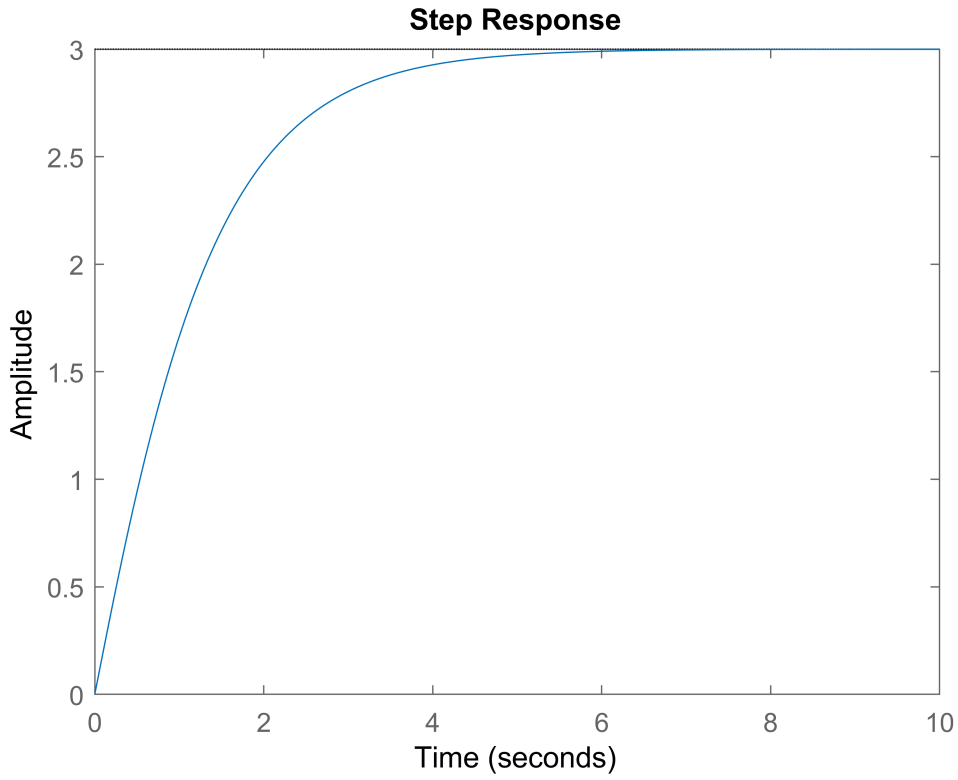

To find the poles and zeros of a transfer function, use **`pole(system)`** and **`zero(systems)`**. To plot the pole-zero plot, use **`pzplot(system)`**. For example, for the system defined above, the poles are

```
pole(H1)
```

```
ans = 2×1
    -2
    -1
```


and the zeros are

```
zero(H1)
```

```
ans = -3
```

We can show the pole-zero plot using

```
pzplot(H1)
```

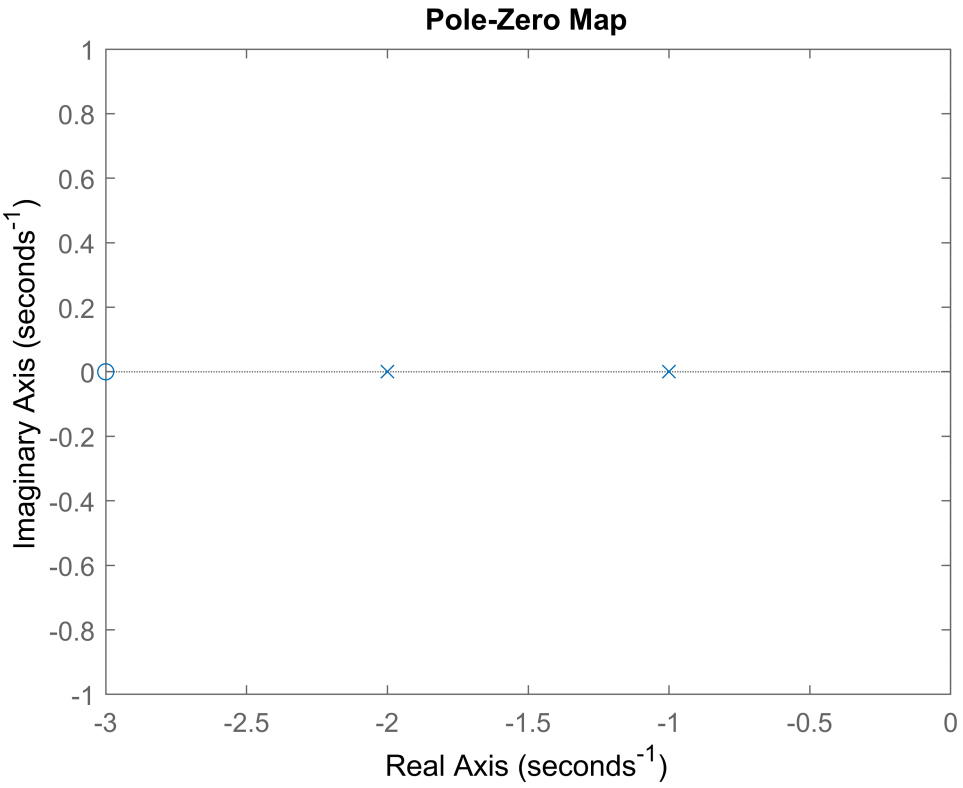

Interconnecting systems

To get the transfer function for two systems connected in feedback, use

```
H = feedback(H1, H2) % Feedback or closed-loop interconnection of systems
```

```
H =

     2 s^3 + 12 s^2 + 22 s + 12
  --------------------------------
  s^4 + 6 s^3 + 17 s^2 + 36 s + 40

Continuous-time transfer function.
```

Use **`doc feedback`** for more information.

3. System Response characteristics

Consider the following step response of an unknown transfer function.

<<fig_lab02_secondorder.png>>

Depending on the location of the zeros and poles in a transfer function, it is possible to define a system response by the following characteristics:

- Rise time (t_r): is the time it takes the system to reach to rise from 10% to 90% of its final value.
- Peak time (t_p): is the time until the response hits its maximum overshoot.

- Overshoot (M_p): is the peak value of the step response of the system.
- Settling time (t_s): is the time for the response to settle within $\pm\Delta$ % of its final value.

It is possible to find these values in **MATLAB** given a transfer function. **stepinfo(sys)** computes the step-response characteristics for a dynamic system model. For example

```
stepinfo(H1)
```

```
ans = struct with fields:
        RiseTime: 2.4200
    SettlingTime: 4.1960
     SettlingMin: 2.7023
     SettlingMax: 2.9974
       Overshoot: 0
      Undershoot: 0
            Peak: 2.9974
        PeakTime: 7.3222
```

Question 1 (2 marks)

For $\xi = \{0.25, 0.75, 1, 2\}$, plot the step response **(for 25 sec)** and identify the characteristics of the transient response of the following system

$$G(s) = \frac{1}{s^2 + 2\xi s + 1}$$

```
%-------------------------------------
% defining the transfer function

xi = 0.25;

% define numerator and denominator
num = 1;
den = [1, 2*xi, 1];
G1 = tf(num, den)
```

```
G1 =


        1
  --------------
  s^2 + 0.5 s + 1

Continuous-time transfer function.
```

```
%-------------------------------------
% plotting the step response

T = 25; % final time value

figure;
step(G1, T)
```

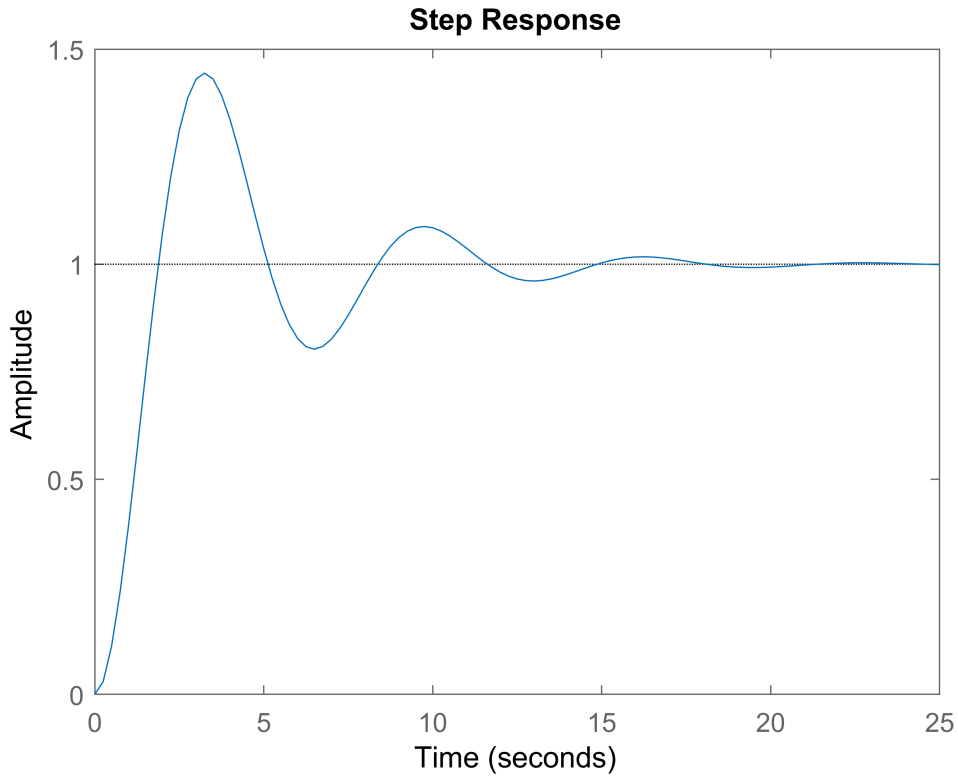


```
%-------------------------------------
% identifying the characteristics
% of the transient response
stepinfo(G1)
```

```
ans = struct with fields:
        RiseTime: 1.2687
    SettlingTime: 14.1159
     SettlingMin: 0.8027
     SettlingMax: 1.4432
       Overshoot: 44.3235
      Undershoot: 0
            Peak: 1.4432
        PeakTime: 3.3157
```

```
%-------------------------------------
% defining the transfer function

xi = 0.75;

% define numerator and denominator
num = 1;
den = [1, 2*xi, 1];
G2 = tf(num, den)
```

```
G2 =

        1
```


```
  --------------
  s^2 + 1.5 s + 1

Continuous-time transfer function.
```

```
%-------------------------------------
% plotting the step response

T = 25; % final time value

figure;
step(G2, T)
```

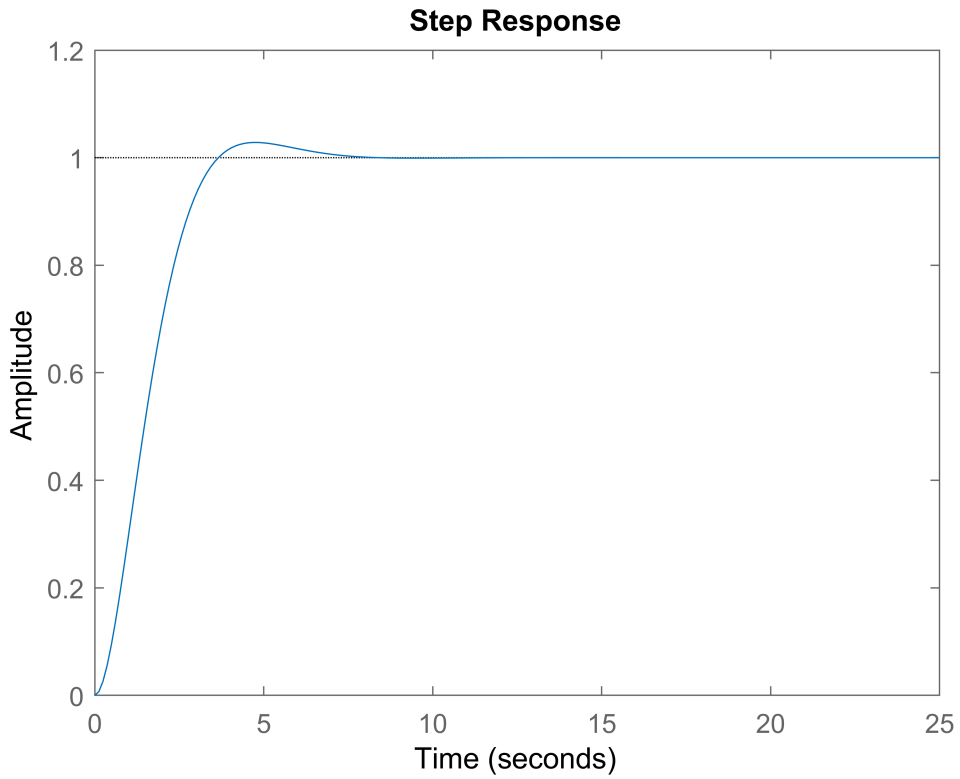


```
%-------------------------------------
% identifying the characteristics
% of the transient response
stepinfo(G2)
```

```
ans = struct with fields:
        RiseTime: 2.2884
    SettlingTime: 5.7426
     SettlingMin: 0.9049
     SettlingMax: 1.0284
       Overshoot: 2.8369
      Undershoot: 0
            Peak: 1.0284
        PeakTime: 4.7280
```

```
%-----------------------------------
% defining the transfer function

xi = 1;

% define numerator and denominator
num = 1;
den = [1, 2*xi, 1];
G3 = tf(num, den)
```

```
G3 =


       1
  ------------
  s^2 + 2 s + 1

Continuous-time transfer function.
```

```
%-----------------------------------
% plotting the step response

T = 25; % final time value

figure;
step(G3, T)
```

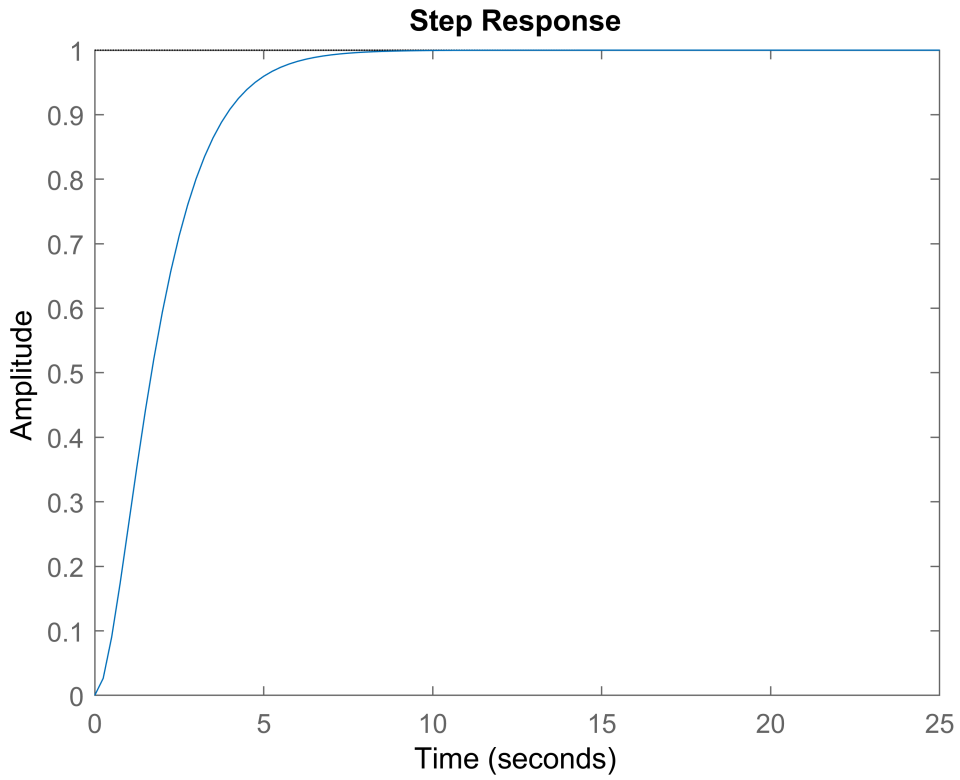


```
%-----------------------------------
```

```
% identifying the characteristics
% of the transient response
stepinfo(G3)
```

```
ans = struct with fields:
        RiseTime: 3.3579
    SettlingTime: 5.8339
     SettlingMin: 0.9000
     SettlingMax: 0.9994
       Overshoot: 0
      Undershoot: 0
            Peak: 0.9994
        PeakTime: 9.7900
```

```
%-------------------------------------
% defining the transfer function

xi = 2;

% define numerator and denominator
num = 1;
den = [1, 2*xi, 1];
G4 = tf(num, den)
```

```
G4 =


        1
  -------------
  s^2 + 4 s + 1

Continuous-time transfer function.
```

```
%-------------------------------------
% plotting the step response

T = 25; % final time value

figure;
step(G4, T)
```

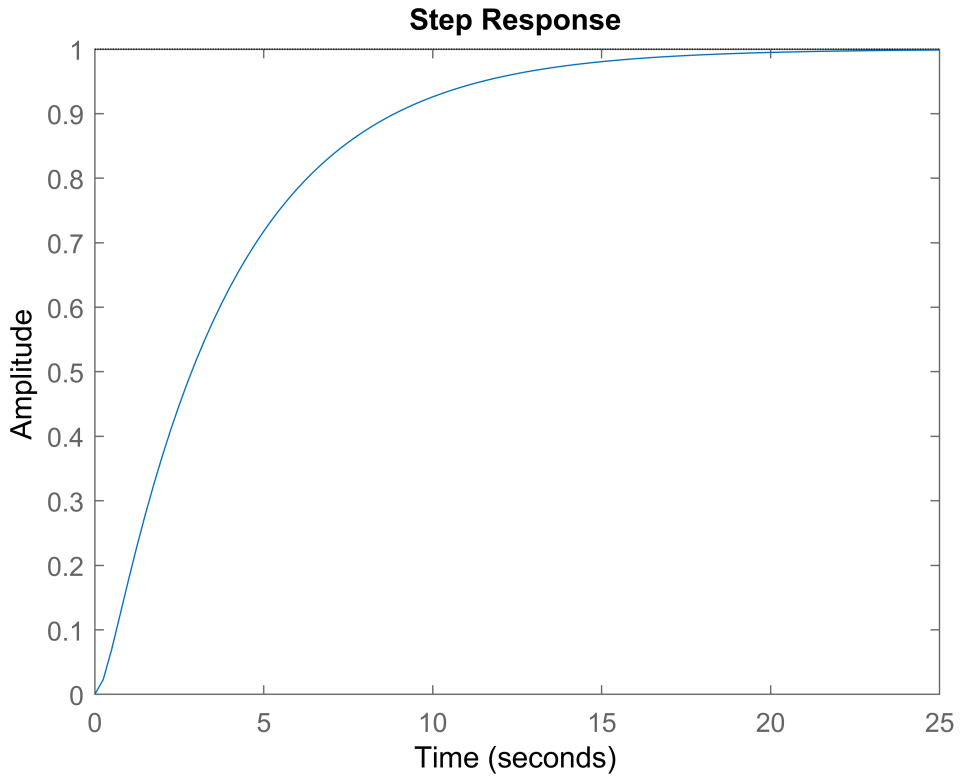


```
%-------------------------------------
% identifying the characteristics
% of the transient response
stepinfo(G4)
```

```
ans = struct with fields:
        RiseTime: 8.2308
    SettlingTime: 14.8789
     SettlingMin: 0.9017
     SettlingMax: 0.9993
       Overshoot: 0
      Undershoot: 0
            Peak: 0.9993
        PeakTime: 27.3269
```

Question 2 (4 marks)

Consider the following open-loop unstable system.

$$Q(s) = \frac{s+1}{s(s-1)(s+6)}$$

A constant gain k (controller) is used to stabilize this system. For different values of $k \in \{10,\ 20,\ 50,\ 100\}$, plot the step response **(for 15 seconds)** of the closed-loop system and identify its characteristics using **`stepinfo`**.

<<fig_lab02_closedLoop.png>>

```
% There are 2 transfer functions that form an interconnected closed loop
```

```
% system. Here we define the first transfer function as "transferFunction1"
% and the 2nd "transferFucntion" for "k" will be defined per case. the transfer
% function for the interconnected system (considering the feedback will be
% then obtained based on "transferFunction1" and k (defined per case basis)

% Define the transfer function
gain = 1;
z = [-1];
p = [0, 1, -6];

transferFunction1 = zpk(z, p, gain)
```

```
transferFunction1 =

      (s+1)
  -------------
  s (s-1) (s+6)

Continuous-time zero/pole/gain model.
```

```
%-------------------------------------
% find the tranferFunction for the closed
% loop system

k1 = 10;
connectedTransferFunction1 = feedback(transferFunction1, k1)
```


```
connectedTransferFunction1 =

              (s+1)
  --------------------------------
  (s+4.603) (s^2 + 0.397s + 2.173)

Continuous-time zero/pole/gain model.
```

```
%-------------------------------------
% plot the step response

T1 = 15;
figure;
step(connectedTransferFunction1, T1)
```

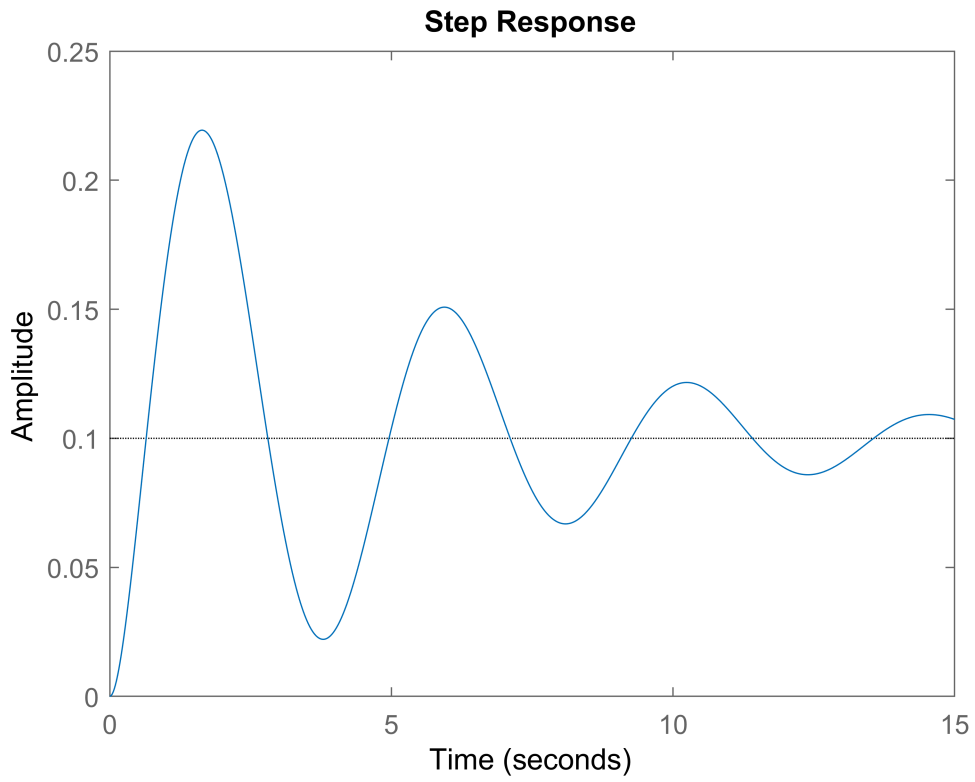


```
%-------------------------------------
% identifying the characteristics
% of the response

stepinfo(connectedTransferFunction1)
```

```
ans = struct with fields:
        RiseTime: 0.4424
    SettlingTime: 21.2506
     SettlingMin: 0.0221
     SettlingMax: 0.2194
       Overshoot: 119.3930
      Undershoot: 0
            Peak: 0.2194
        PeakTime: 1.6408
```

```
%-------------------------------------
% find the tranferFunction for the closed
% loop system

k2 = 20;
connectedTransferFunction2 = feedback(transferFunction1, k2)
```


```
connectedTransferFunction2 =

              (s+1)
  -------------------------------
  (s+2.579) (s^2 + 2.421s + 7.756)
```

```
Continuous-time zero/pole/gain model.
```

```
%-----------------------------------
% plot the step response

T1 = 15;
figure;
step(connectedTransferFunction2, T1)
```

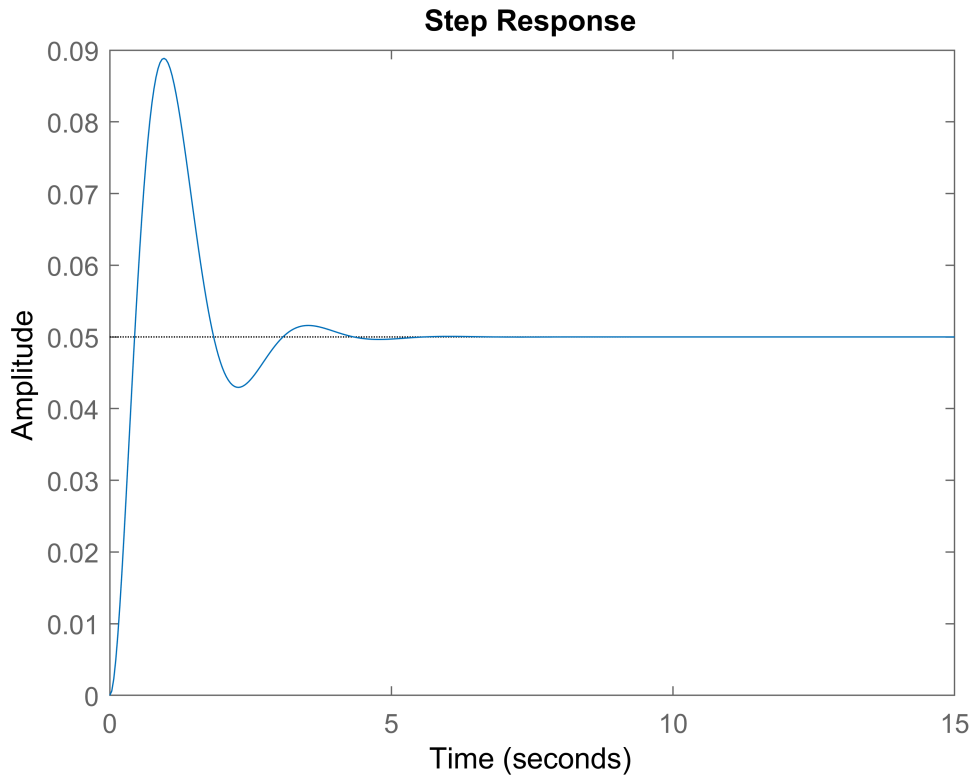


```
%-----------------------------------
% identifying the characteristics
% of the response

stepinfo(connectedTransferFunction2)
```

```
ans = struct with fields:
        RiseTime: 0.2989
    SettlingTime: 3.8974
     SettlingMin: 0.0430
     SettlingMax: 0.0889
       Overshoot: 77.7158
      Undershoot: 0
            Peak: 0.0889
        PeakTime: 0.9644
```

```
%-----------------------------------
%-----------Conclusion---------------
```

```
% the system stabilizes quicker and
% has a lower peak compared
% to the previous case with smaller k
% (smaller Settling time and Peak in comparison with
% the previous case)
```

```
%-------------------------------------
% find the tranferFunction for the closed
% loop system

k3 = 50;
connectedTransferFunction3 = feedback(transferFunction1, k3)
```


```
connectedTransferFunction3 =

              (s+1)
  -------------------------------
  (s+1.274) (s^2 + 3.726s + 39.25)

Continuous-time zero/pole/gain model.
```

```
%-------------------------------------
% plot the step response

T1 = 15;
figure;
step(connectedTransferFunction3, T1)
```

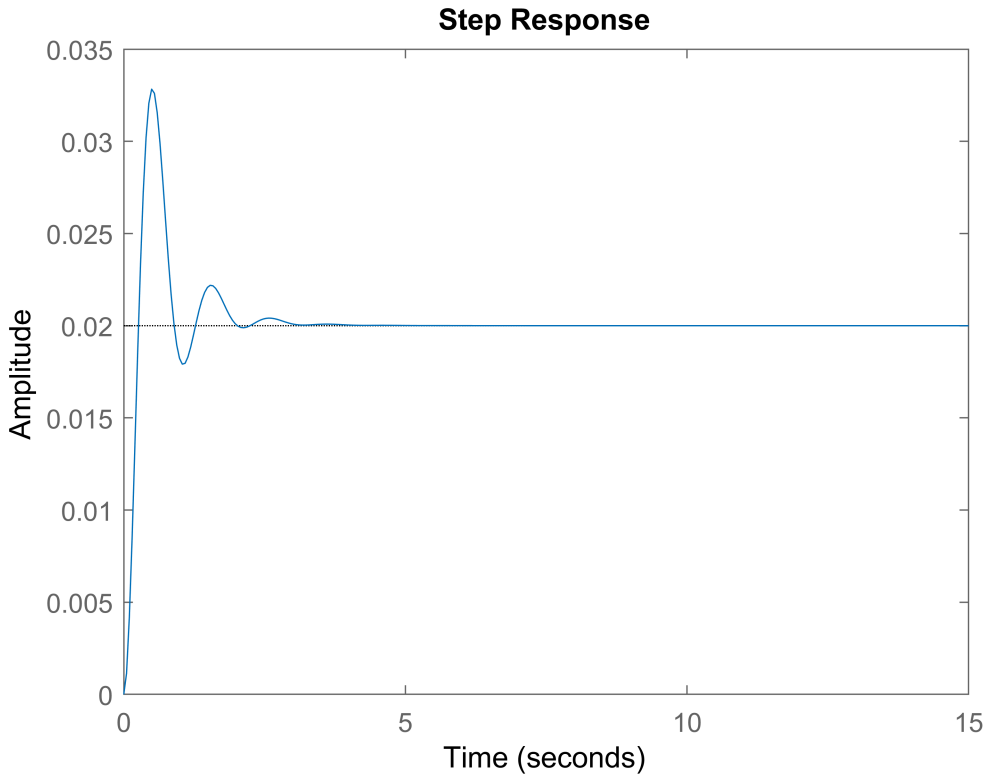

```
%-------------------------------------
% identifying the characteristics
% of the response

stepinfo(connectedTransferFunction3)
```

```
ans = struct with fields:
        RiseTime: 0.1767
    SettlingTime: 2.6377
     SettlingMin: 0.0179
     SettlingMax: 0.0329
       Overshoot: 64.3033
      Undershoot: 0
            Peak: 0.0329
        PeakTime: 0.5062
```

```
%-------------------------------------
%-----------Conclusion---------------
% Again, the system stabilizes quicker and
% has a lower peak compared
% to the previous case with smaller k
% (smaller Settling time and Peak in comparison with
% the previous case)
```

```
%-------------------------------------
% find the tranferFunction for the closed
% loop system


k4 = 100;
connectedTransferFunction4 = feedback(transferFunction1, k4)
```

```
connectedTransferFunction4 =

              (s+1)
  -------------------------------
  (s+1.115) (s^2 + 3.885s + 89.67)

Continuous-time zero/pole/gain model.
```

```
%-------------------------------------
% plot the step response
T1 = 15;
figure;
step(connectedTransferFunction4, T1)
```

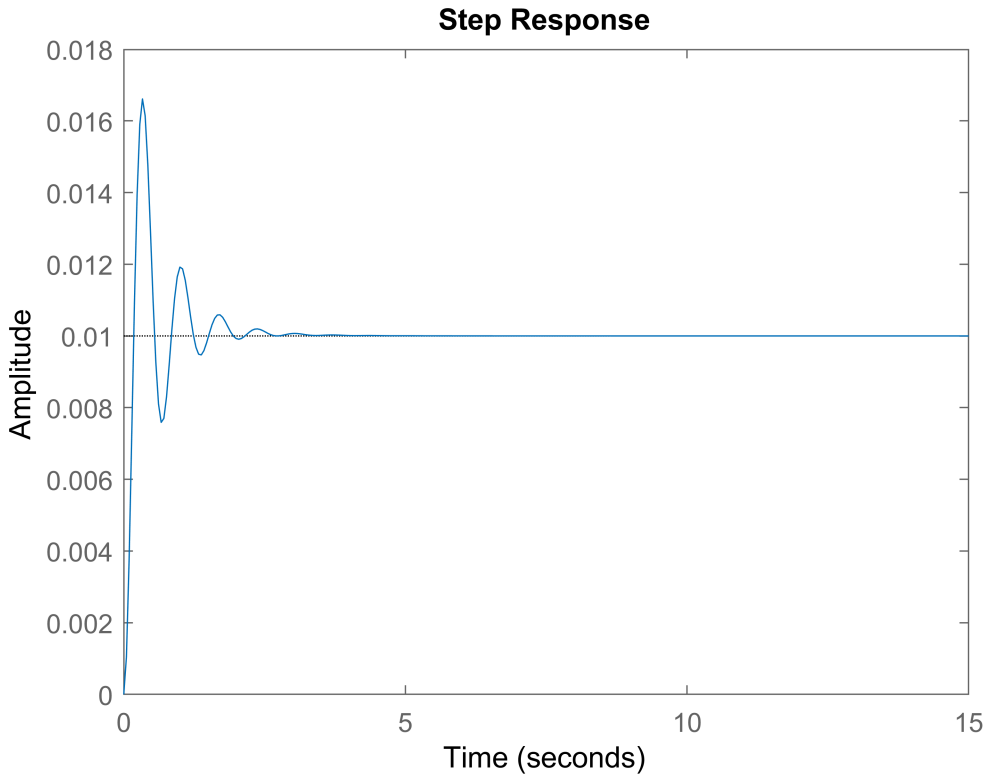


```
%-------------------------------------
% identifying the characteristics
% of the response

stepinfo(connectedTransferFunction4)
```

```
ans = struct with fields:
        RiseTime: 0.1190
    SettlingTime: 1.8674
     SettlingMin: 0.0076
     SettlingMax: 0.0166
       Overshoot: 66.0662
      Undershoot: 0
            Peak: 0.0166
        PeakTime: 0.3303
```

```
%-------------------------------------
%-----------Conclusion---------------
% Again, the system stabilizes quicker and
% has a lower peak compared
% to the previous case with smaller k
% (smaller Settling time and Peak in comparison with
% the previous case)
```

Question 3 (4 marks)

Consider the closed-loop transfer function in Question 2.

$$T(s) = \frac{kQ(s)}{1 + kQ(s)}$$

We would like to approximate this system to a second order system of the form:

$$G(s) = \frac{\frac{k}{|p_3|}(s - z_1)}{(s - p_1)(s - p_2)}$$

1. For $k = \{10,\ 20\}$, find p_1, p_2 and p_3, where p_1 and p_2 are the dominant poles (i.e., poles with the smallest absolute real values) and p_3 is the ineffective pole(i.e., the pole with the largest absolute real value).
2. For $k = \{10,\ 20\}$, plot the step response of the new second order system for **15 sec** and identify its characteristics using **`stepinfo`**.
3. For $k = \{10,\ 20\}$, compare the step response with those obtained in Question 2. What do you observe?

- 1)

```
% Find the pole(s) and zero(s) of the two transfer functions

% transfer functions with k = 10
%--------------------------------------------------------------------------------
connectedTransferFunction1 % Found in the previous question with k = 10
```

```
connectedTransferFunction1 =

              (s+1)
  --------------------------------
  (s+4.603) (s^2 + 0.397s + 2.173)

Continuous-time zero/pole/gain model.
```

```
poles_k10 = pole(connectedTransferFunction1) % find the poles of the transfer function
```

```
poles_k10 = 3×1 complex
  -4.6030 + 0.0000i
  -0.1985 + 1.4605i
  -0.1985 - 1.4605i
```

```
zeros_k10 = zero(connectedTransferFunction1)
```

```
zeros_k10 = -1
```

```
% transfer functions with k = 20
%--------------------------------------------------------------------------------
connectedTransferFunction2 % Found in the previous question with k = 20
```

```
connectedTransferFunction2 =

              (s+1)
  --------------------------------
  (s+2.579) (s^2 + 2.421s + 7.756)
```

```
Continuous-time zero/pole/gain model.
```

```
poles_k20 = pole(connectedTransferFunction2) % find the poles of the transfer function
```

```
poles_k20 = 3×1 complex
  -1.2107 + 2.5081i
  -1.2107 - 2.5081i
  -2.5786 + 0.0000i
```

```
zeros_k20 = zero(connectedTransferFunction2)
```

```
zeros_k20 = -1
```

Transfer functions with dominant poles

```
% k = 10

% loop through the poles, find the complex
% number with the max real value and store it in p3

for i = 1 : length(poles_k10)
    if abs(real(poles_k10(i))) == max(abs(real(poles_k10)))
        p3_k10 = poles_k10(i) % ineffective pole
    end
end
```

```
p3_k10 = -4.6030
```

```

% remove p3 from the poles
poles_k10(poles_k10 == p3_k10) = [];

% p1 and p2 will be the remaining poles
% dominant poles
p1_k10 = poles_k10(1)
```

```
p1_k10 = -0.1985 + 1.4605i
```

```
p2_k10 = poles_k10(2)
```

```
p2_k10 = -0.1985 - 1.4605i
```

```
% k = 20

% loop through the poles, find the complex
% number with the max real value and store it in p3

for i = 1 : length(poles_k20)
    if abs(real(poles_k20(i))) == max(abs(real(poles_k20)))
        p3_k20 = poles_k20(i) % ineffective pole
    end
end
```

```
p3_k20 = -2.5786
```

```
% remove p3 from the poles
poles_k20(poles_k20 == p3_k20) = [];

% p1 and p2 will be the remaining poles
% dominant poles
p1_k20 = poles_k20(1)
```

```
p1_k20 = -1.2107 + 2.5081i
```

```
p2_k20 = poles_k20(2)
```

```
p2_k20 = -1.2107 - 2.5081i
```

- 2)

```
% k = 10

connectedTransferFunction1
```

```
connectedTransferFunction1 =

              (s+1)
  --------------------------------
  (s+4.603) (s^2 + 0.397s + 2.173)

Continuous-time zero/pole/gain model.
```

```
% define the approximated transfer function
gain = 1;
z = [-1];
p = [p1_k10, p2_k10]; % don't include the ineffective pole p3_k10

tfApprox1 = zpk(z, p, gain)/abs(p3_k10)
```


```
tfApprox1 =

      0.21725 (s+1)
  ----------------------
  (s^2 + 0.397s + 2.173)

Continuous-time zero/pole/gain model.
```

```
%-------------------------------------
% plot the step response

T1 = 15;
figure;
step(tfApprox1, T1)
```

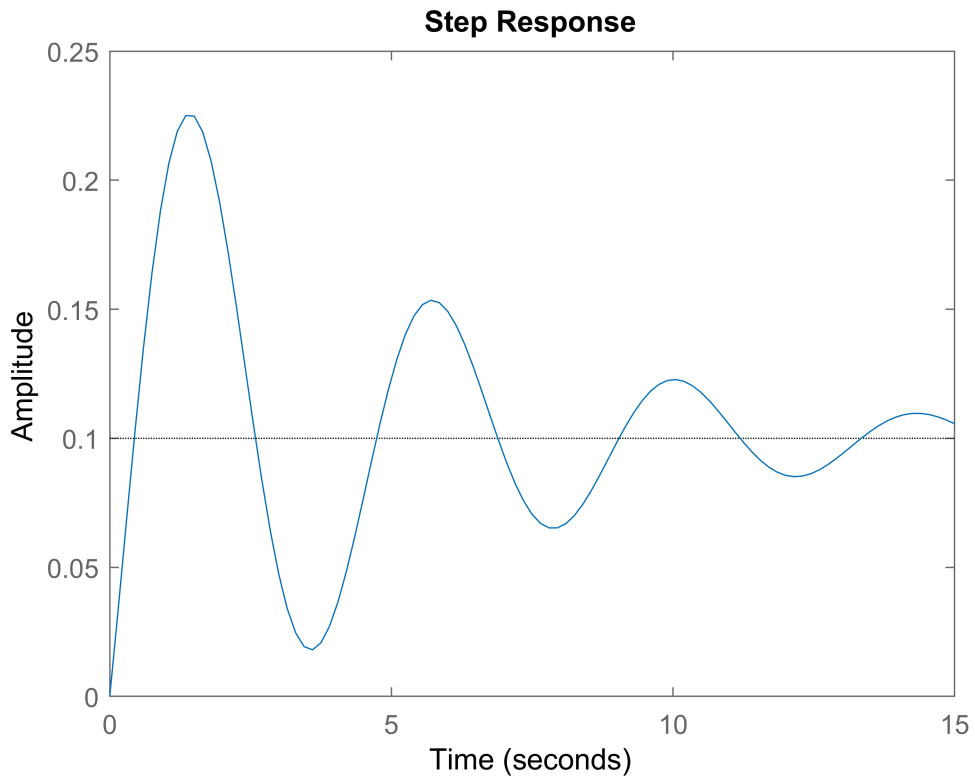


```
%-------------------------------------
% identifying the characteristics
% of the response

stepinfo(tfApprox1)
```

```
ans = struct with fields:
        RiseTime: 0.3487
    SettlingTime: 21.0226
     SettlingMin: 0.0182
     SettlingMax: 0.2250
       Overshoot: 124.9788
      Undershoot: 0
            Peak: 0.2250
        PeakTime: 1.4920
```

```
% k = 20

connectedTransferFunction2
```

```
connectedTransferFunction2 =

              (s+1)
  --------------------------------
  (s+2.579) (s^2 + 2.421s + 7.756)

Continuous-time zero/pole/gain model.
```

```
% define the approximated transfer function
gain = 1;
z = [-1];
p = [p1_k20, p2_k20]; % don't include the ineffective pole p3_k20

tfApprox2 = zpk(z, p, gain)/abs(p3_k20)
```


```
tfApprox2 =

      0.38781 (s+1)
  ---------------------
  (s^2 + 2.421s + 7.756)

Continuous-time zero/pole/gain model.
```

```
%-------------------------------------
% plot the step response

T1 = 15;
figure;
step(tfApprox2, T1)
```

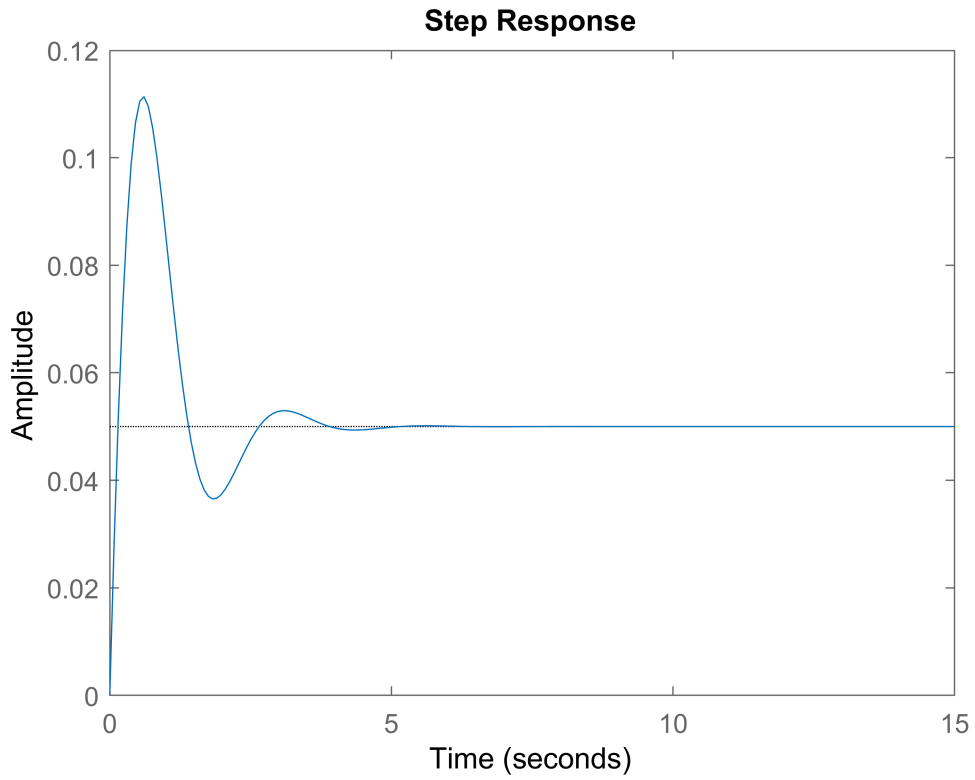


```
%-------------------------------------
% identifying the characteristics
% of the response

stepinfo(tfApprox2)
```

```
ans = struct with fields:
        RiseTime: 0.1163
    SettlingTime: 3.6016
     SettlingMin: 0.0365
     SettlingMax: 0.1113
       Overshoot: 122.6637
      Undershoot: 0
            Peak: 0.1113
        PeakTime: 0.6086
```

- 3)

```
% k = 10
%
```

```
% k = 20
%
```

```
% [Answer here]
```