December 1997

$\mathcal{N}$ *National Semiconductor*

LM2940/LM2940C
1A Low Dropout Regulator

General Description

The LM2940/LM2940C positive voltage regulator features the ability to source 1A of output current with a dropout voltage of typically 0.5V and a maximum of 1V over the entire temperature range. Furthermore, a quiescent current reduction circuit has been included which reduces the ground current when the differential between the input voltage and the output voltage exceeds approximately 3V. The quiescent current with 1A of output current and an input-output differential of 5V is therefore only 30 mA. Higher quiescent currents only exist when the regulator is in the dropout mode ($V_{IN} - V_{OUT} \le 3V$).

Designed also for vehicular applications, the LM2940/LM2940C and all regulated circuitry are protected from reverse battery installations or 2-battery jumps. During line transients, such as load dump when the input voltage can momentarily exceed the specified maximum operating voltage, the regulator will automatically shut down to protect both the internal circuits and the load. The LM2940/LM2940C cannot be harmed by temporary mirror-image insertion. Familiar regulator features such as short circuit and thermal overload protection are also provided.

Features

- Dropout voltage typically 0.5V @I_O = 1A
- Output current in excess of 1A
- Output voltage trimmed before assembly
- Reverse battery protection
- Internal short circuit current limit
- Mirror image insertion protection
- P$^+$ Product Enhancement tested

Typical Application

DS008822-3

*Required if regulator is located far from power supply filter.

**C_{OUT} must be at least 22 µF to maintain stability. May be increased without bound to maintain regulation during transients. Locate as close as possible to the regulator. This capacitor must be rated over the same operating temperature range as the regulator and the ESR is critical; see curve.

Ordering Information

Temperature Range	Output Voltage						Package
	5.0	8.0	9.0	10	12	15	
0˚C ≤ T_A ≤ 125˚C	LM2940CT-5.0		LM2940CT-9.0		LM2940CT-12	LM2940CT-15	TO-220
	LM2940CS-5.0		LM2940CS-9.0		LM2940CS-12	LM2940CS-15	TO-263
−40˚C ≤ T_A ≤ 125˚C	LM2940T-5.0	LM2940T-8.0	LM2940T-9.0	LM2940T-10	LM2940T-12		TO-220
	LM2940S-5.0	LM2940S-8.0	LM2940S-9.0	LM2940S-10	LM2940S-12		TO-263
−40˚C ≤ T_A ≤ 85˚C	LM2940IMP-5.0	LM2940IMP-8.0	LM2940IMP-9.0	LM2940IMP-10	LM2940IMP-12	LM2940IMP-15	SOT-223
SOT-223 Package Marking	L53B	L54B	L0EB	L55B	L56B	L70B	
−55˚C ≤ T_A ≤ 125˚C	LM2940K-5.0/883	LM2940K-8.0/883			LM2940K-12/883	LM2940K-15/883	TO-3

The physical size of the SOT-223 is too small to contain the full device part number. The package markings indicated are what will appear on the actual device.

Absolute Maximum Ratings (Notes 2, 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

LM2940S, T, IMP ≤ 100 ms	60V
LM2940K/883 ≤ 20 ms	40V
LM2940CS, T ≤ 1 ms	45V
Internal Power Dissipation	
(Note 3)	Internally Limited
Maximum Junction Temperature	150˚C
Storage Temperature Range	−65˚C ≤ T_J ≤ +150˚C
Lead Temperature, Time for Wave Soldering	
TO-3 (K) Package	300˚C, 10s
TO-220 (T) Package	260˚C, 10s
TO-263 (S) Package	260˚C, 4s
SOT-223 (IMP) Package	260˚C, 4s
ESD Susceptibility (Note 4)	2 kV

Operating Conditions (Note 1)

Input Voltage	26V
Temperature Range	
LM2940K/883	−55˚C ≤ T_A ≤ 125˚C
LM2940T, LM2940S	−40˚C ≤ T_A ≤ 125˚C
LM2940CT, LM2940CS	0˚C ≤ T_A ≤ 125˚C
LM2940IMP	−40˚C ≤ T_A ≤ 85˚C

Electrical Characteristics

V_{IN} = V_O + 5V, I_O = 1A, C_O = 22 µF, unless otherwise specified. **Boldface limits apply over the entire operating temperature range of the indicated device.** All other specifications apply for T_A = T_J = 25˚C

Output Voltage (V_O)		5V			8V			
Parameter	Conditions	Typ	LM2940 Limit (Note 5)	LM2940/883 Limit (Note 6)	Typ	LM2940 Limit (Note 5)	LM2940/883 Limit (Note 6)	Units
		6.25V ≤ V_{IN} ≤ 26V			**9.4V ≤ V_{IN} ≤ 26V**			
Output Voltage	5 mA ≤ I_O ≤ 1A	5.00	4.85/**4.75**	4.85/**4.75**	8.00	7.76/**7.60**	7.76/**7.60**	V_{MIN}
			5.15/**5.25**	5.15/**5.25**		8.24/**8.40**	8.24/**8.40**	V_{MAX}
Line Regulation	V_O + 2V ≤ V_{IN} ≤ 26V, I_O = 5 mA	20	50	40/**50**	20	80	50/**80**	mV_{MAX}
Load Regulation	50 mA ≤ I_O ≤ 1A							mV_{MAX}
	LM2940, LM2940/883	35	50/**80**	50/**100**	55	80/**130**	80/**130**	
	LM2940C	35	50		55	80		
Output Impedance	100 mADC and 20 mArms, f_O = 120 Hz	35		1000/**1000**	55		1000/**1000**	mΩ
Quiescent Current	V_O +2V ≤ V_{IN} ≤ 26V, I_O = 5 mA							mA_{MAX}
	LM2940, LM2940/883	10	15/**20**	15/**20**	10	15/**20**	15/**20**	
	LM2940C	10	15					
	V_{IN} = V_O + 5V, I_O = 1A	30	45/**60**	50/**60**	30	45/**60**	50/**60**	mA_{MAX}
Output Noise Voltage	10 Hz – 100 kHz, I_O = 5 mA	150		700/**700**	240		1000/**1000**	$µV_{rms}$
Ripple Rejection	f_O = 120 Hz, 1 V_{rms}, I_O = 100 mA							dB_{MIN}
	LM2940	72	60/**54**		66	54/**48**		
	LM2940C	72	60		66	54		
	f_O = 1 kHz, 1 V_{rms}, I_O = 5 mA			60/**50**			54/**48**	dB_{MIN}
Long Term Stability		20			32			mV/ 1000 Hr
Dropout Voltage	I_O = 1A	0.5	0.8/**1.0**	0.7/**1.0**	0.5	0.8/**1.0**	0.7/**1.0**	V_{MAX}
	I_O = 100 mA	110	150/**200**	150/**200**	110	150/**200**	150/**200**	mV_{MAX}
Short Circuit Current	(Note 7)	1.9	1.6	1.5/**1.3**	1.9	1.6	1.6/**1.3**	A_{MIN}

Electrical Characteristics (Continued)

$V_{IN} = V_O + 5V$, $I_O = 1A$, $C_O = 22$ µF, unless otherwise specified. **Boldface limits apply over the entire operating temperature range of the indicated device.** All other specifications apply for $T_A = T_J = 25°C$

Output Voltage (V_O)		5V			8V			
Parameter	Conditions	Typ	LM2940 Limit (Note 5)	LM2940/883 Limit (Note 6)	Typ	LM2940 Limit (Note 5)	LM2940/883 Limit (Note 6)	Units
Maximum Line Transient	$R_O = 100\Omega$ LM2940, T ≤ 100 ms LM2940/883, T ≤ 20 ms LM2940C, T ≤ 1 ms	75 55	60/**60** 45	40/**40**	75 55	60/**60** 45	40/**40**	V_{MIN}
Reverse Polarity DC Input Voltage	$R_O = 100\Omega$ LM2940, LM2940/883 LM2940C	−30 −30	−15/**−15** −15	−15/**−15**	−30 −30	−15/**−15** −15	−15/**−15**	V_{MIN}
Reverse Polarity Transient Input Voltage	$R_O = 100\Omega$ LM2940, T ≤ 100 ms LM2940/883, T ≤ 20 ms LM2940C, T ≤ 1 ms	−75 −55	−50/**−50** −45/**−45**	−45/**−45**	−75	−50/**−50**	−45/**−45**	V_{MIN}

Electrical Characteristics

$V_{IN} = V_O + 5V$, $I_O = 1A$, $C_O = 22$ µF, unless otherwise specified. **Boldface limits apply over the entire operating temperature range of the indicated device.** All other specifications apply for $T_A = T_J = 25°C$

Output Voltage (V_O)		9V		10V		
Parameter	Conditions	Typ	LM2940 Limit (Note 5)	Typ	LM2940 Limit (Note 5)	Units
			10.5V ≤ V_{IN} ≤ 26V		**11.5V ≤ V_{IN} ≤ 26V**	
Output Voltage	5 mA ≤ I_O ≤1A	9.00	8.73/**8.55** 9.27/**9.45**	10.00	9.70/**9.50** 10.30/**10.50**	V_{MIN} V_{MAX}
Line Regulation	V_O + 2V ≤ V_{IN} ≤ 26V, I_O = 5 mA	20	90	20	100	mV_{MAX}
Load Regulation	50 mA ≤ I_O ≤ 1A LM2940 LM2940C	60 60	90/**150** 90	65	100/**165**	mV_{MAX}
Output Impedance	100 mADC and 20 mArms, f_O = 120 Hz	60		65		$m\Omega$
Quiescent Current	V_O +2V ≤ V_{IN} < 26V, I_O = 5 mA LM2940 LM2940C	10 10	15/**20** 15	10	15/**20**	mA_{MAX}
	V_{IN} = V_O + 5V, I_O = 1A	30	45/**60**	30	45/**60**	mA_{MAX}
Output Noise Voltage	10 Hz – 100 kHz, I_O = 5 mA	270		300		$µV_{rms}$
Ripple Rejection	f_O = 120 Hz, 1 V_{rms}, I_O = 100 mA LM2940 LM2940C	64 64	52/**46** 52	63	51/**45**	dB_{MIN}
Long Term Stability		34		36		mV/ 1000 Hr

Electrical Characteristics (Continued)

$V_{IN} = V_O + 5V$, $I_O = 1A$, $C_O = 22\ \mu F$, unless otherwise specified. **Boldface limits apply over the entire operating temperature range of the indicated device.** All other specifications apply for $T_A = T_J = 25°C$

Output Voltage (V_O)		9V		10V		Units
Parameter	Conditions	Typ	LM2940 Limit (Note 5)	Typ	LM2940 Limit (Note 5)	
Dropout Voltage	I_O = 1A	0.5	0.8/**1.0**	0.5	0.8/**1.0**	V_{MAX}
	I_O = 100 mA	110	150/**200**	110	150/**200**	mV_{MAX}
Short Circuit Current	(Note 7)	1.9	1.6	1.9	1.6	A_{MIN}
Maximum Line Transient	$R_O = 100\Omega$ $T \leq 100$ ms LM2940	75	60/**60**	75	60/**60**	V_{MIN}
	LM2940C	55	45			
Reverse Polarity DC Input Voltage	$R_O = 100\Omega$ LM2940	−30	−15/**−15**	−30	−15/**−15**	V_{MIN}
	LM2940C	−30	−15			
Reverse Polarity Transient Input Voltage	$R_O = 100\Omega$ $T \leq 100$ ms LM2940	−75	−50/**−50**	−75	−50/**−50**	V_{MIN}
	LM2940C	−55	−45/**−45**			

Electrical Characteristics

$V_{IN} = V_O + 5V$, $I_O = 1A$, $C_O = 22\ \mu F$, unless otherwise specified. **Boldface limits apply over the entire operating temperature range of the indicated device.** All other specifications apply for $T_A = T_J = 25°C$

Output Voltage (V_O)		12V			15V			Units
Parameter	Conditions	Typ	LM2940 Limit (Note 5)	LM2940/833 Limit (Note 6)	Typ	LM2940 Limit (Note 5)	LM2940/833 Limit (Note 6)	
			13.6V ≤ V_{IN} ≤ 26V			**16.75V ≤ V_{IN} ≤ 26V**		
Output Voltage	5 mA ≤ I_O ≤1A	12.00	11.64/**11.40**	11.64/**11.40**	15.00	14.55/**14.25**	14.55/**14.25**	V_{MIN}
			12.36/**12.60**	12.36/**12.60**		15.45/**15.75**	15.45/**15.75**	V_{MAX}
Line Regulation	$V_O + 2V \leq V_{IN} \leq 26V$, I_O = 5 mA	20	120	75/**120**	20	150	95/**150**	mV_{MAX}
Load Regulation	50 mA ≤ I_O ≤ 1A LM2940, LM2940/883	55	120/**200**	120/**190**			150/**240**	mV_{MAX}
	LM2940C	55	120		70	150		
Output Impedance	100 mADC and 20 mArms, f_O = 120 Hz	80		1000/**1000**	100		1000/**1000**	$m\Omega$
Quiescent Current	$V_O +2V \leq V_{IN} \leq 26V$, I_O = 5 mA LM2940, LM2940/883	10	15/**20**	15/**20**			15/**20**	mA_{MAX}
	LM2940C	10	15		10	15		
	$V_{IN} = V_O + 5V$, I_O = 1A	30	45/**60**	50/**60**	30	45/**60**	50/**60**	mA_{MAX}
Output Noise Voltage	10 Hz – 100 kHz, I_O = 5 mA	360		1000/**1000**	450		1000/**1000**	μV_{rms}

Electrical Characteristics (Continued)

$V_{IN} = V_O + 5V$, $I_O = 1A$, $C_O = 22$ μF, unless otherwise specified. **Boldface limits apply over the entire operating temperature range of the indicated device.** All other specifications apply for $T_A = T_J = 25°C$

Output Voltage (V_O)		12V			15V			
Parameter	Conditions	Typ	LM2940 Limit (Note 5)	LM2940/833 Limit (Note 6)	Typ	LM2940 Limit (Note 5)	LM2940/833 Limit (Note 6)	Units
Ripple Rejection	f_O = 120 Hz, 1 V_{rms}, I_O = 100 mA							dB_{MIN}
	LM2940	66	54/**48**					
	LM2940C	66	54		64	52		
	f_O = 1 kHz, 1 V_{rms}, I_O = 5 mA			52/**46**			48/**42**	dB_{MIN}
Long Term Stability		48			60			mV/ 1000 Hr
Dropout Voltage	I_O = 1A	0.5	0.8/**1.0**	0.7/**1.0**	0.5	0.8/**1.0**	0.7/**1.0**	V_{MAX}
	I_O = 100 mA	110	150/**200**	150/**200**	110	150/**200**	150/**200**	mV_{MAX}
Short Circuit Current	(Note 7)	1.9	1.6	1.6/**1.3**	1.9	1.6	1.6/**1.3**	A_{MIN}
Maximum Line Transient	R_O = 100Ω							V_{MIN}
	LM2940, T ≤ 100 ms	75	60/**60**					
	LM2940/883, T ≤ 20 ms			40/**40**			40/**40**	
	LM2940C, T ≤ 1 ms	55	45		55	45		
Reverse Polarity DC Input Voltage	R_O = 100Ω							V_{MIN}
	LM2940, LM2940/883	−30	−15/**−15**	−15/**−15**			−15/**−15**	
	LM2940C	−30	−15		−30	−15		
Reverse Polarity Transient Input Voltage	R_O = 100Ω							V_{MIN}
	LM2940, T ≤ 100 ms	−75	−50/**−50**					
	LM2940/883, T ≤ 20 ms			−45/**−45**			−45/**−45**	
	LM2940C, T ≤ 1 ms	−55	−45/**−45**		−55	−45/**−45**		

Note 1: Absolute Maximum Ratings are limits beyond which damage to the device may occur. Operating Conditions are conditions under which the device functions but the specifications might not be guaranteed. For guaranteed specifications and test conditions see the Electrical Characteristics.

Note 2: Military specifications complied with RETS/SMD at the time of printing. For current specifications refer to RETS LM2940K-5.0, LM2940K-8.0, LM2940K-12, and LM2940K-15. SMD numbers are 5962-8958701YA(5V), 5962-9083301YA(8V), 5962-9088401YA(12V), and 5962-9088501YA(15V).

Note 3: The maximum allowable power dissipation is a function of the maximum junction temperature, T_J, the junction-to-ambient thermal resistance, θ_{J-A}, and the ambient temperature, T_A. Exceeding the maximum allowable power dissipation will cause excessive die temperature, and the regulator will go into thermal shutdown. The value of θ_{J-A} (for devices in still air with no heatsink) is 60°C/W for the TO-220 package, 80°C/W for the TO-263 package, and 174°C/W for the SOT-223 package. The effective value of θ_{J-A} can be reduced by using a heatsink (see Application Hints for specific information on heatsinking). The values of θ_{J-A} and θ_{J-C} for the K02A package are 39°C/W and 4°C/W respectively.

**Note 4:** ESD rating is based on the human body model, 100 pF discharged through 1.5 kΩ.

Note 5: All limits are guaranteed at $T_A = T_J = 25°C$ only (standard typeface) or over the entire operating temperature range of the indicated device (boldface type). All limits at $T_A = T_J = 25°C$ are 100% production tested. All limits at temperature extremes are guaranteed via correlation using standard Statistical Quality Control methods.

Note 6: All limits are guaranteed at $T_A = T_J = 25°C$ only (standard typeface) or over the entire operating temperature range of the indicated device (boldface type). All limits are 100% production tested and are used to calculate Outgoing Quality Levels.

Note 7: Output current will decrease with increasing temperature but will not drop below 1A at the maximum specified temperature.

Typical Performance Characteristics

Dropout Voltage

DS008822-13

Dropout Voltage vs Temperature

DS008822-14

Output Voltage vs Temperature

DS008822-15

Quiescent Current vs Temperature

DS008822-16

Quiescent Current

DS008822-17

Quiescent Current

DS008822-18

Line Transient Response

DS008822-19

Load Transient Response

DS008822-20

Ripple Rejection

DS008822-21

Typical Performance Characteristics (Continued)

Output Impedance

DS008822-22

Maximum Power Dissipation (TO-220)

DS008822-23

**Maximum Power Dissipation (TO-3)**

DS008822-24

**Maximum Power Dissipation (TO-263) See** (Note 3)

DS008822-10

Typical Performance Characteristics (Continued)

Low Voltage Behavior

DS008822-25

Low Voltage Behavior

DS008822-26

Low Voltage Behavior

DS008822-27

Low Voltage Behavior

DS008822-28

Low Voltage Behavior

DS008822-29

Low Voltage Behavior

DS008822-30

**Output at
Voltage Extremes**

DS008822-31

**Output at
Voltage Extremes**

DS008822-32

**Output at
Voltage Extremes**

DS008822-33

**Output at
Voltage Extremes**

DS008822-34

**Output at
Voltage Extremes**

DS008822-35

**Output at
Voltage Extremes**

DS008822-36

Typical Performance Characteristics (Continued)

Output Capacitor ESR

DS008822-6
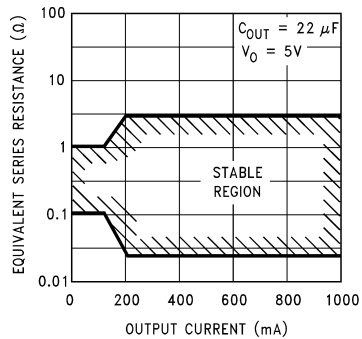
Peak Output Current

DS008822-8
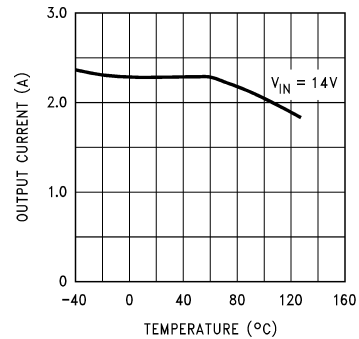
Equivalent Schematic Diagram

DS008822-1
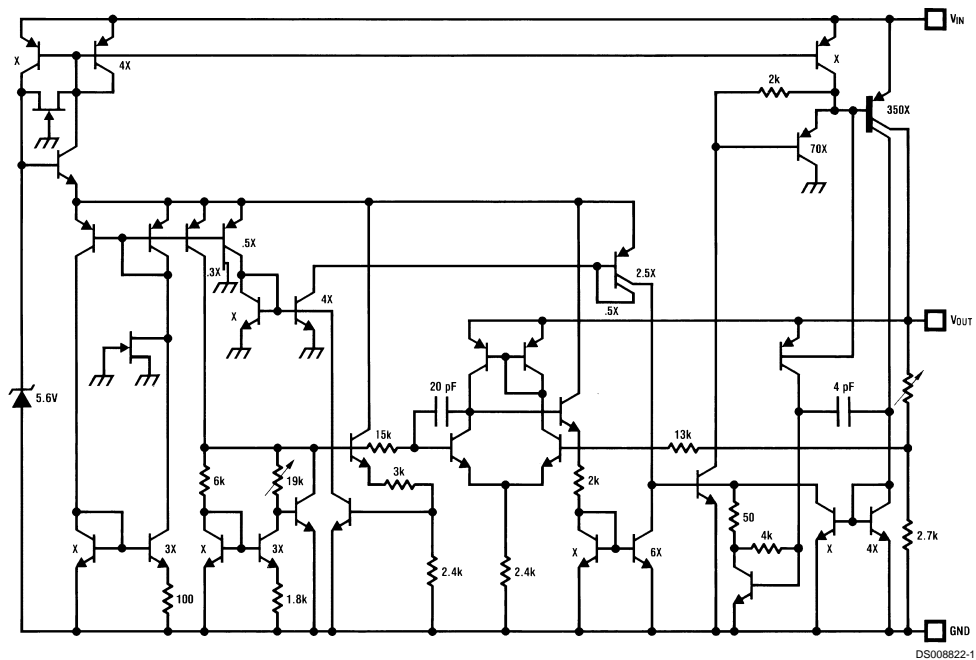
Application Hints

EXTERNAL CAPACITORS

The output capacitor is critical to maintaining regulator stability, and must meet the required conditions for both ESR (Equivalent Series Resistance) and minimum amount of capacitance.

MINIMUM CAPACITANCE:

The minimum output capacitance required to maintain stability is 22 μF (this value may be increased without limit). Larger values of output capacitance will give improved transient response.

ESR LIMITS:

The ESR of the output capacitor will cause loop instability if it is too high or too low. The acceptable range of ESR plotted versus load current is shown in the graph below. *It is essential that the output capacitor meet these requirements, or oscillations can result.*

www.national.com

Application Hints (Continued)

Output Capacitor ESR

FIGURE 1. ESR Limits

It is important to note that for most capacitors, ESR is specified only at room temperature. However, the designer must ensure that the ESR will stay inside the limits shown over the entire operating temperature range for the design.

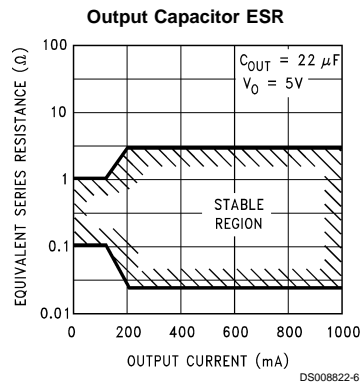For aluminum electrolytic capacitors, ESR will increase by about 30X as the temperature is reduced from 25°C to −40°C. This type of capacitor is not well-suited for low temperature operation.

Solid tantalum capacitors have a more stable ESR over temperature, but are more expensive than aluminum electrolytics. A cost-effective approach sometimes used is to parallel an aluminum electrolytic with a solid Tantalum, with the total capacitance split about 75/25% with the Aluminum being the larger value.

If two capacitors are paralleled, the effective ESR is the parallel of the two individual values. The "flatter" ESR of the Tantalum will keep the effective ESR from rising as quickly at low temperatures.

HEATSINKING

A heatsink may be required depending on the maximum power dissipation and maximum ambient temperature of the application. Under all possible operating conditions, the junction temperature must be within the range specified under Absolute Maximum Ratings.

To determine if a heatsink is required, the power dissipated by the regulator, P_D, must be calculated.

The figure below shows the voltages and currents which are present in the circuit, as well as the formula for calculating the power dissipated in the regulator:
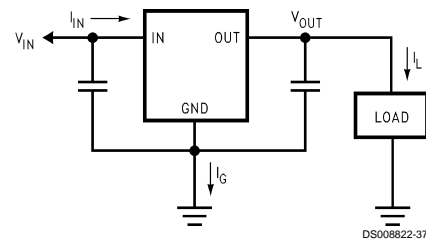
$I_{IN} = I_L \div I_G$

$P_D = (V_{IN} - V_{OUT})\, I_L + (V_{IN})\, I_G$

FIGURE 2. Power Dissipation Diagram

The next parameter which must be calculated is the maximum allowable temperature rise, T_R (max). This is calculated by using the formula:

$$T_R\ (\text{max}) = T_J(\text{max}) - T_A\ (\text{max})$$

where: T_J (max) is the maximum allowable junction temperature, which is 125°C for commercial grade parts.

T_A (max) is the maximum ambient temperature which will be encountered in the application.

Using the calculated values for T_R(max) and P_D, the maximum allowable value for the junction-to-ambient thermal resistance, $\theta_{(J-A)}$, can now be found:

$$\theta_{(J-A)} = T_R\ (\text{max})/P_D$$

IMPORTANT: If the maximum allowable value for $\theta_{(J-A)}$ is found to be ≥ 53°C/W for the TO-220 package, ≥ 80°C/W for the TO-263 package, or ≥ 174°C/W for the SOT-223 package, no heatsink is needed since the package alone will dissipate enough heat to satisfy these requirements.

If the calculated value for $\theta_{(J-A)}$ falls below these limits, a heatsink is required.

HEATSINKING TO-220 PACKAGE PARTS

The TO-220 can be attached to a typical heatsink, or secured to a copper plane on a PC board. If a copper plane is to be used, the values of $\theta_{(J-A)}$ will be the same as shown in the next section for the TO-263.

If a manufactured heatsink is to be selected, the value of heatsink-to-ambient thermal resistance, $\theta_{(H-A)}$, must first be calculated:

$$\theta_{(H-A)} = \theta_{(J-A)} - \theta_{(C-H)} - \theta_{(J-C)}$$

Where: $\theta_{(J-C)}$ is defined as the thermal resistance from the junction to the surface of the case. A value of 3°C/W can be assumed for $\theta_{(J-C)}$ for this calculation.

$\theta_{(C-H)}$ is defined as the thermal resistance between the case and the surface of the heatsink. The value of $\theta_{(C-H)}$ will vary from about 1.5°C/W to about 2.5°C/W (depending on method of attachment, insulator, etc.). If the exact value is unknown, 2°C/W should be assumed for $\theta_{(C-H)}$.

When a value for $\theta_{(H-A)}$ is found using the equation shown, *a heatsink must be selected that has a value that is less than or equal to this number.*

$\theta_{(H-A)}$ is specified numerically by the heatsink manufacturer in the catalog, or shown in a curve that plots temperature rise vs power dissipation for the heatsink.

Application Hints (Continued)

HEATSINKING TO-263 AND SOT-223 PACKAGE PARTS

Both the TO-263 ("S") and SOT-223 ("MP") packages use a copper plane on the PCB and the PCB itself as a heatsink. To optimize the heat sinking ability of the plane and PCB, solder the tab of the package to the plane.

Figure 3 shows for the TO-263 the measured values of $\theta_{(J-A)}$ for different copper area sizes using a typical PCB with 1 ounce copper *and no solder mask over the copper area used for heatsinking*.

DS008822-38

FIGURE 3. $\theta_{(J-A)}$ **vs Copper (1 ounce) Area for the TO-263 Package**

As shown in the figure, increasing the copper area beyond 1 square inch produces very little improvement. It should also be observed that the minimum value of $\theta_{(J-A)}$ for the TO-263 package mounted to a PCB is 32˚C/W.

As a design aid, *Figure 4* shows the maximum allowable power dissipation compared to ambient temperature for the TO-263 device (assuming $\theta_{(J-A)}$ is 35˚C/W and the maximum junction temperature is 125˚C).

DS008822-39
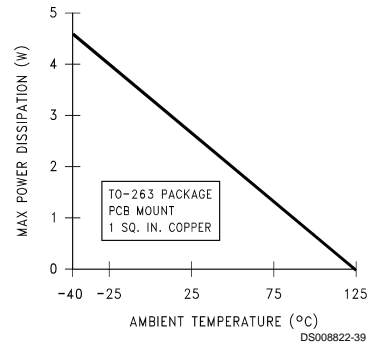
FIGURE 4. Maximum Power Dissipation vs T$_{AMB}$ for the TO-263 Package

Figure 5 and *Figure 6* show the information for the SOT-223 package. *Figure 6* assumes a $\theta_{(J-A)}$ of 74˚C/W for 1 ounce copper and 51˚C/W for 2 ounce copper and a maximum junction temperature of 125˚C.

Please see AN1028 for power enhancement techniques to be used with the SOT-223 package.

DS008822-40

FIGURE 5. $\theta_{(J-A)}$ **vs Copper (2 ounce) Area for the SOT-223 Package**

DS008822-41
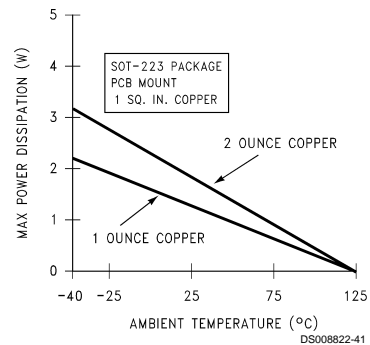
FIGURE 6. Maximum Power Dissipation vs T$_{AMB}$ for the SOT-223 Package

www.national.com

Connection Diagrams

(TO-220) Plastic Package

DS008822-2

Front View
Order Number LM2940CT-5.0, LM2940CT-9.0,
LM2940CT-12, LM2940CT-15, LM2940T-5.0,
LM2940T-8.0, LM2940T-9.0,
LM2940T-10 or LM2940T-12
See NS Package Number TO3B

TO-3 Metal Can Package (K)

DS008822-7

Bottom View
Order Number LM2940K-5.0/883,
LM2940K-8.0/883, LM2940K-12/883, LM2940K-15/883
See NS Package Number K02A

Connection Diagrams (Continued)

(TO-263) Surface-Mount Package

DS008822-11

Top View

DS008822-12

Side View
Order Number LM2940CS-5.0, LM2940CS-9.0,
LM2940CS-12,
LM2940CS-15, LM2940S-5.0, LM2940S-8.0,
LM2940S-9.0, LM2940S-10 or LM2940S-12
See NS Package Number TS3B

3-Lead SOT-223

DS008822-42

(Front View)
Order Part Number LM2940IMP-5.0
LM2940IMP-8.0 LM2940IMP-9.0
LM2940IMP-10 LM2940IMP-12 LM2940IMP-15
See NS Package Number MA04A

Physical Dimensions inches (millimeters) unless otherwise noted

0.256 ± 0.008
[6.5 ± 0.2]

-A-

0.118 ± 0.004
[3 ± 0.1]

⌖ | 0.004 [0.1] Ⓜ | C | A Ⓢ | B Ⓢ

4

0.274 $^{+0.013}_{-0.010}$
[6.96 $^{+0.33}_{-0.25}$]

0.140 $^{+0.006}_{-0.010}$
[3.56 $^{+0.15}_{-0.25}$]

-B-

1   3

0.090
[2.29] TYP

0.129
[3.28] MAX

SYMM
C̸

0.059
[1.5] MAX

0.248
[6.3]

0.059
[1.5] MAX TYP

0.039
[0.99] MAX TYP

0.0900
[2.286]

LAND PATTERN RECOMMENDATION

R 0.006 ± 0.002 TYP
[0.15 ± 0.05]

R 0.006 ± 0.002 TYP
[0.15 ± 0.05]

GAGE PLANE

0.061 – 0.071
[1.55 – 1.80]

(0.063)
[1.6]

0.012 $^{+0.001}_{-0.003}$
[0.3 $^{+0.02}_{-0.07}$]
TYP

0.010
[0.25]

-C-

⌖ | 0.003 [0.07] | C

0.001 – 0.004
[0.03 – 0.10]
TYP

0.029 $^{+0.002}_{-0.003}$ TYP
[0.74 $^{+0.05}_{-0.07}$]

0.036
[0.91] MIN TYP

SEATING PLANE

(0.067)
[1.7]

0°–10°
TYP

⌖ | 0.004 [0.1] Ⓜ | C | A Ⓢ | B Ⓢ

MA04A (REV A)

3-Lead SOT-223 Package
Order Part Number LM2940IMP-5.0
LM2940IMP-8.0 LM2940IMP-9.0
LM2940IMP-10 LM2940IMP-12 LM2940IMP-15
NS Package Number MA04A

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

2X Ø 0.151-0.161
[3.84-4.09]

0.980-1.020
[24.89-25.91]
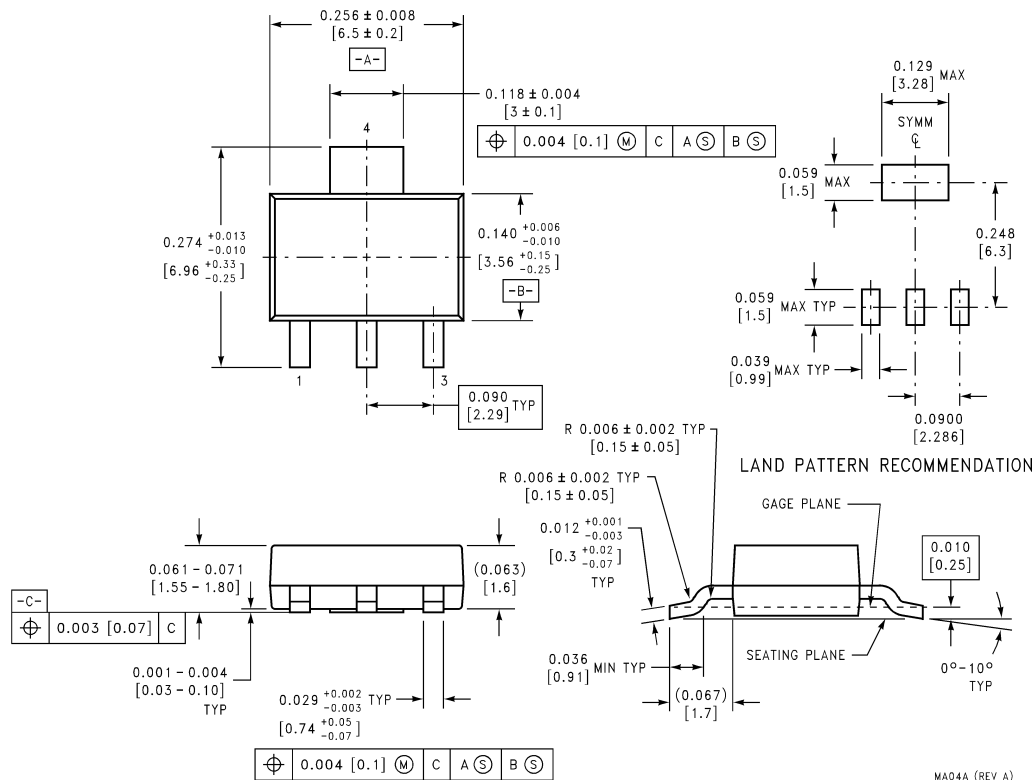
R 0.495-0.510
[12.57-12.95]

0.660-0.670
[16.76-17.02]

2

1

1.177-1.197
[29.90-30.40]

2X Ø 0.038-0.043
[0.97-1.09]

0.210-0.220
[5.33-5.59]

2X R 0.168-0.178
[4.27-4.52]

0.425-0.435
[10.80-11.05]

0.420-0.500
[10.67-12.70]

0.325-0.352
[8.26-8.94]

0.060-0.070
[1.52-1.78]

Ø 0.880-0.915
[22.35-23.24]

Ø 0.760-0.775
[19.30-19.69]

UNCONTROLLED
LEAD DIA
0.025
[0.64] MAX

0.116 MAX
[2.95]

SEATING PLANE
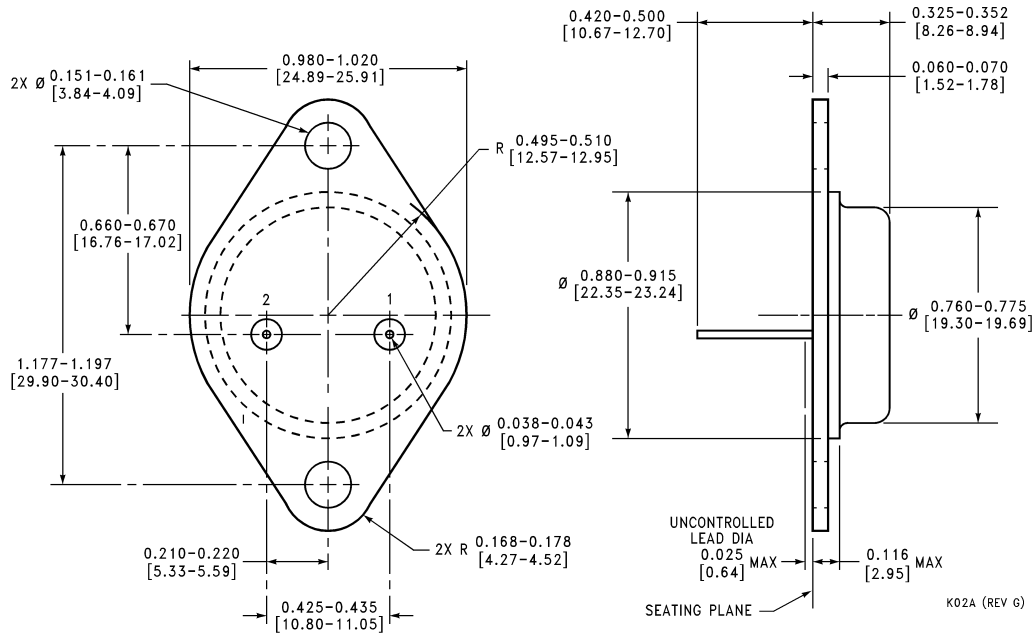
K02A (REV G)

2 Lead TO-3 Metal Can Package (K)
Order Number LM2940K-5.0/883,
LM2940K-8.0/883, LM2940K-12/883, LM2940K-15/883
NS Package Number K02A

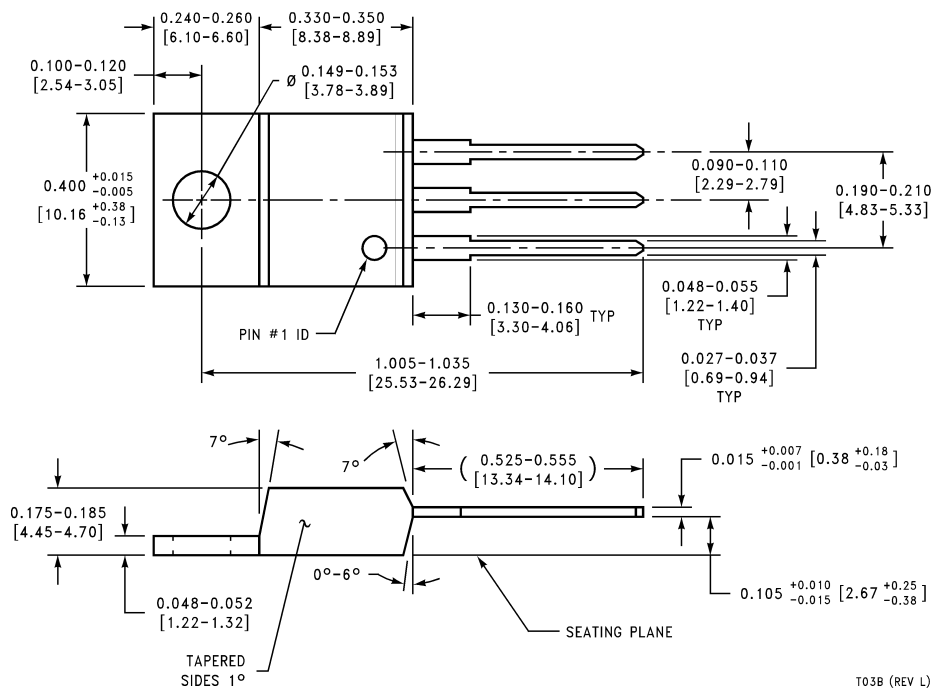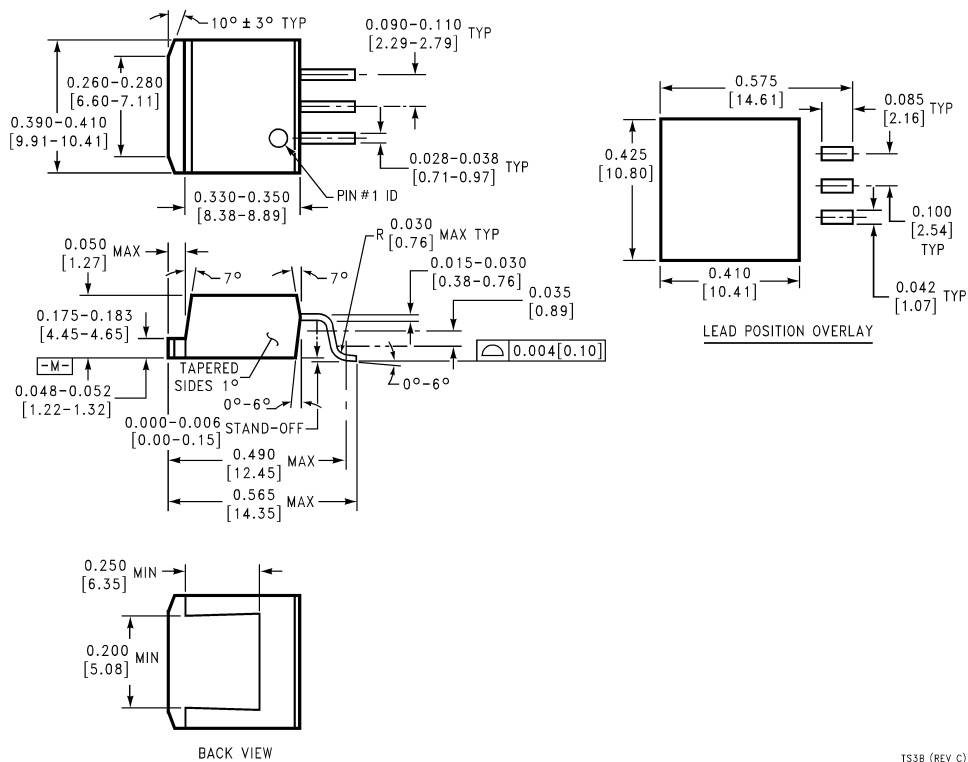# Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

0.240–0.260
[6.10–6.60]

0.330–0.350
[8.38–8.89]

0.100–0.120
[2.54–3.05]

Ø 0.149–0.153
[3.78–3.89]

0.400 $^{+0.015}_{-0.005}$
[10.16 $^{+0.38}_{-0.13}$]

0.090–0.110
[2.29–2.79]

0.190–0.210
[4.83–5.33]

PIN #1 ID

0.130–0.160
[3.30–4.06] TYP

0.048–0.055
[1.22–1.40]
TYP

1.005–1.035
[25.53–26.29]

0.027–0.037
[0.69–0.94]
TYP

7°

7°

(0.525–0.555)
[13.34–14.10]

0.015 $^{+0.007}_{-0.001}$ [0.38 $^{+0.18}_{-0.03}$]

0.175–0.185
[4.45–4.70]

0°–6°

0.048–0.052
[1.22–1.32]

0.105 $^{+0.010}_{-0.015}$ [2.67 $^{+0.25}_{-0.38}$]

SEATING PLANE

TAPERED
SIDES 1°

TO3B (REV L)

3-Lead TO-220 Plastic Package (T)
Order Number LM2940T-5.0, LM2940T-8.0,
LM2940T-9.0, LM2940T-10, LM2940T-12, LM2940CT-5.0,
LM2940CT-12 or LM2940CT-15
NS Package Number TO3B

LM2940/LM2940C 1A Low Dropout Regulator

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

10° ± 3° TYP

0.090–0.110
[2.29–2.79] TYP

0.260–0.280
[6.60–7.11]

0.390–0.410
[9.91–10.41]

0.028–0.038
[0.71–0.97] TYP

0.330–0.350
[8.38–8.89]

PIN # 1 ID

0.575
[14.61]

0.085
[2.16] TYP

0.425
[10.80]

0.100
[2.54] TYP

0.410
[10.41]

0.042
[1.07] TYP

LEAD POSITION OVERLAY

0.050
[1.27] MAX

7° 7°

R 0.030
[0.76] MAX TYP

0.015–0.030
[0.38–0.76]

0.035
[0.89]

0.175–0.183
[4.45–4.65]

0.004[0.10]

–M–

TAPERED
SIDES 1°

0.048–0.052
[1.22–1.32]

0°–6°

0°–6°

0.000–0.006
[0.00–0.15] STAND–OFF

0.490
[12.45] MAX

0.565
[14.35] MAX

0.250
[6.35] MIN

0.200
[5.08] MIN

BACK VIEW

TS3B (REV C)

3-Lead TO-263 Surface Mount Package
Order Number LM2940S-5.0, LM2940S-8.0,
LM2940S-9.0, LM2940S-10, LM2940S-12,
LM2940CS-5.0, LM2940CS-12 or LM2940CS-15
NS Package Number TS3B

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.

2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.