
Code explanation

Auxiliary contact(Micro Switch)

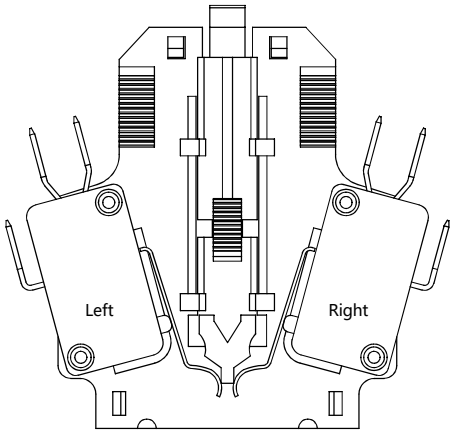

HCDP	2C	300V	Q	L

Product Series
HCDP: apply HCDP series


Contact form and Qty
1C：1 SPDT
2C：2 SPDT

Maximum Voltage level
300V：250V AC/DC

Terminal Code
Q：Quick connect terminal

Location of Micro Switch
Nil：Left+Right
L：Left
R：Right

Auxiliary contact

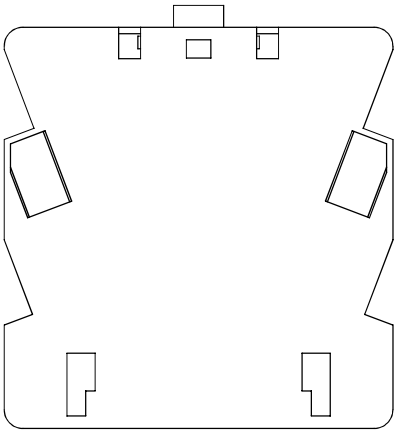

HCDP	1Z	600V	Q


Product Series
HCDP: apply HCDP series

Contact form
1X：1NO　　2X:2NO
1Y：1NC　　2Y:2NC
1Z：1NO+1NC

Maximum Voltage Level
600V：600VAC

Terminal Code
Q：Quick connect terminal
S：Screw terminal
C：QC+Screw

Auxiliary contact

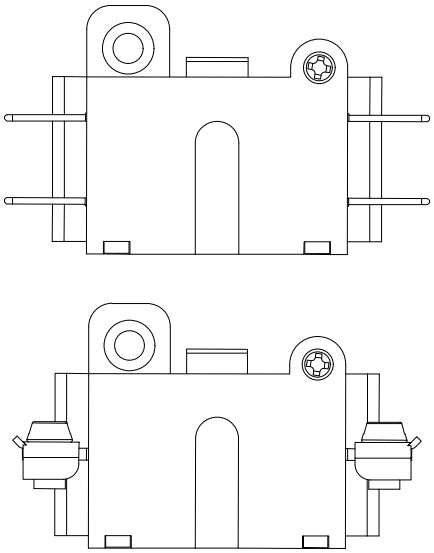

HCDP	1Z	600V	Q	9

Product Series
HCDP: apply HCDP series


Contact form
1X：1NO
1Y：1NC
1Z：1NO+1NC

Maximum Voltage Level
600V：600VAC

Terminal Code
Q：Quick connect terminal
S：Screw terminal (1NO or 1NC)

Apply to 75-90FLA

Auxiliary contact(Micro Switch)

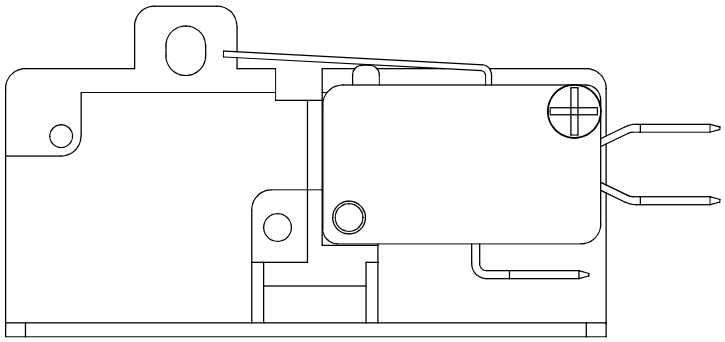

HCDP1C300VQ9

CONTACT RATING – Auxiliary Contact

Contact Form:	Rating Voltage (VAC)	120	240	480	600
1 NO 2 NO	Rating breaking current (A)	3	1.5	0.75	0.6
1 NC 2 NC	Maximal making current (A)	30	15	7.5	6
1 NO+1 NC	Ith (A)	10	10	10	10


CONTACT RATING – Micro Switch

Contact Form:	10A,125 or 250VAC 0.6A,125VDC 0.3A,250VDC
1 SPDT	


Dimension

inch[mm]

Auxiliary Contact-Apply to 3 Poles 20-60FLA & 4 poles 20-40FLA

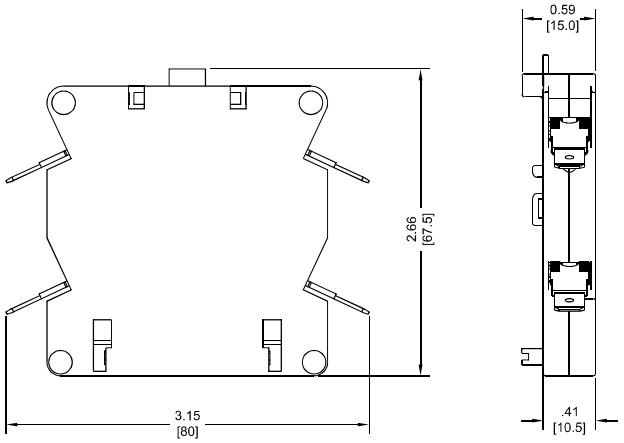


Auxiliary Contact(Micro Switch)-Apply to 3 Poles 20-60FLA & 4 poles 20-40FLA

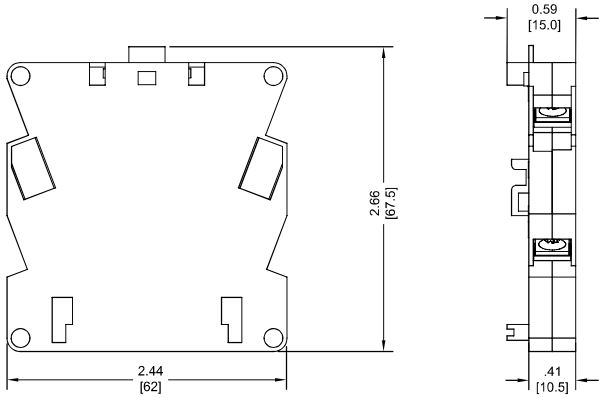


Auxiliary Contact (Micro Switch) -Apply to 3 Poles 75-90FLA

inch[mm]


Auxiliary Contact(Micro Switch)-Apply to 3 Poles 20-60FLA & 4 poles 20-40FLA

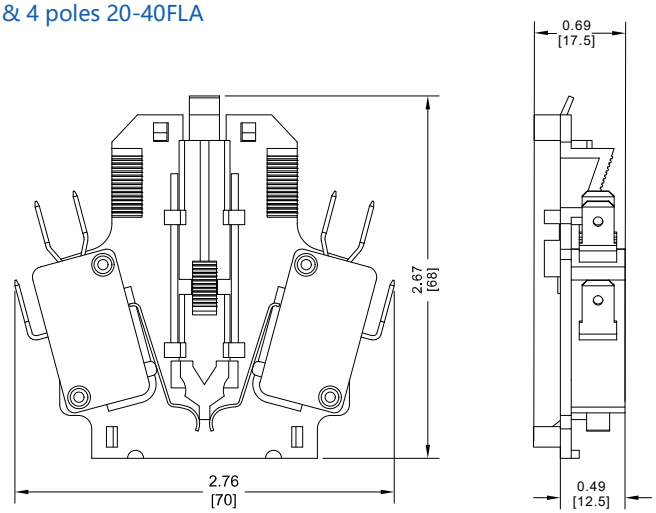


Auxiliary Contact（Micro Switch）-Apply to 3 Poles 75-90FLA

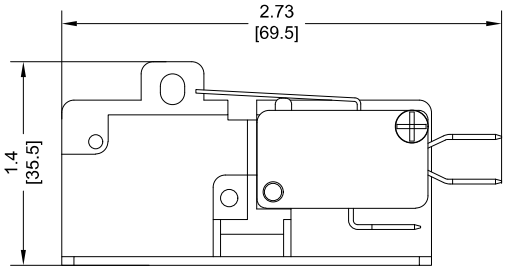


Auxiliary Contact-Apply to 3 Poles 75-90FLA

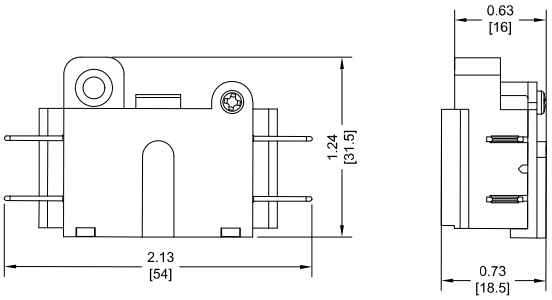


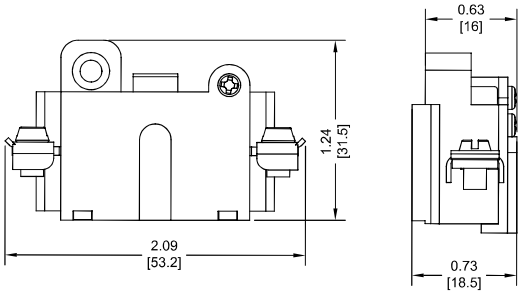


Auxiliary Contact

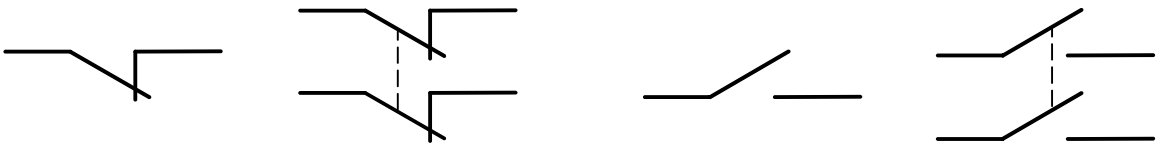

1NC　　2NC　　1NO　　2NO



1NO+1NC



SPDT