
Code explanation

Auxiliary contact

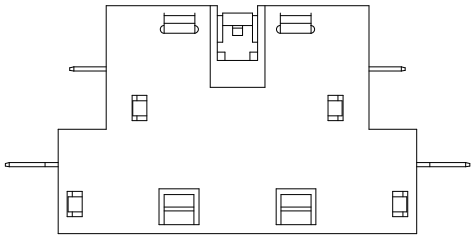

SHDA	-	1X	600V	C	I	100

Product Series
SHDA: apply SHD&SHC series

Pack Code:
"-" : Bulkpack
Y : Individual Pack
A through Z: Customer identification
(not affect construction and performance)

Number of Poles:
1X: 1 pole normally open
2X: 2 Pole normally open
1Y: 1 Pole normally close
1Z: 1 Pole normally open and 1 pole normally close

Maximum Voltage Level
600V: 600 V AC

Code of terminal
C: Quick connect terminal and screw terminal
Q: Quick connect terminal
S: Screw terminal


Switch Configuration Code
Blank: None
I: Inverted switch from standard position (For the inverted configuration, the switch format may be switched from our standard configuration based on the customer's request. An example would be for 1NO/1NC switch. Oue customer may want the NO leg in the top position where our standard is the bottom position.

Customer Designation:
Blank: None
100 – 999: Company assigned customer specific designation for a qualified customer special in marking, termination, or other significant variation from the standard construction. When blank, no options apply.

Optional Code:
Blank: None
00000 through 99999 or AAAAA through ZZZZZ and any combination used to define special marking, termination or mounting(Note: All numbers beginning in C indicate a cover is applied) When blank, NO optional apply.

Code explanation

Auxiliary contact(Micro Switch)

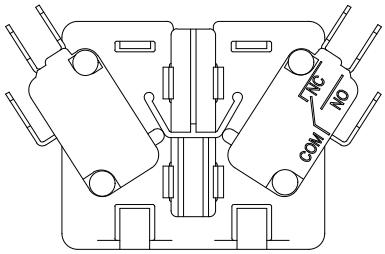

SHDA Y 2C 300V Q L

Product Series
SHDA: apply SHD&SHC series

Pack Code:
"-" : Bulkpack
Y : Individual Pack
A through Z: Customer identification
(not affect construction and performance)

Contact form and Qty
1C: 1 SPDT
2C: 2 SPDT

Maximum Voltage level
300V: 250V AC/DC

Terminal Code
Q: Quick connect terminal

Location of Micro Switch
Nil: Left+Right
L: Left
R: Right

CONTACT RATING – Auxiliary Contact

Contact Form:	Rating Voltage (VAC)	120	240	480	600
1 NO 2 NO	Rating breaking current (A)	3	1.5	0.75	0.6
1 NC	Maximal making current (A)	30	15	7.5	6
1 NO+1 NC	Ith (A)	10	10	10	10


CONTACT RATING – Micro Switch

Contact Form:	
2 SPDT	10A,125 or 250VAC
1 SPDT Left	0.6A,125VDC
1 SPDT Right	0.3A,250VDC


Dimension

inch[mm]

Auxiliary Contact(Micro Switch)-Apply to SHC-3 Poles 20-40FLA & SHC-4 poles 20-40FLA& SHD-3 Poles 50-60FLA(Model B) & SHD-3 poles 75-120FLA

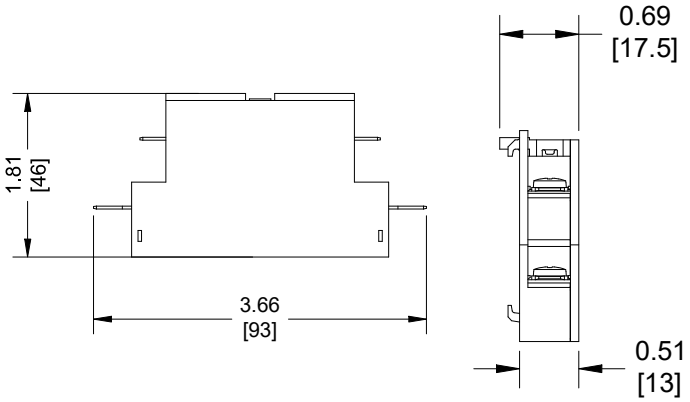


SHDAY1Z600VC

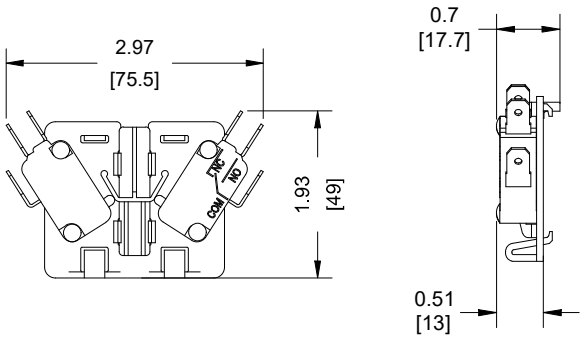


SHDAY2C300VQ


Auxiliary Contact




1NC




1NO



2NO



1NO+1NC



SPDT