


SC360
SC360SE
无线鼠标
Wireless mouse



产品使用说明书
Product instructions

按键布局/key layout

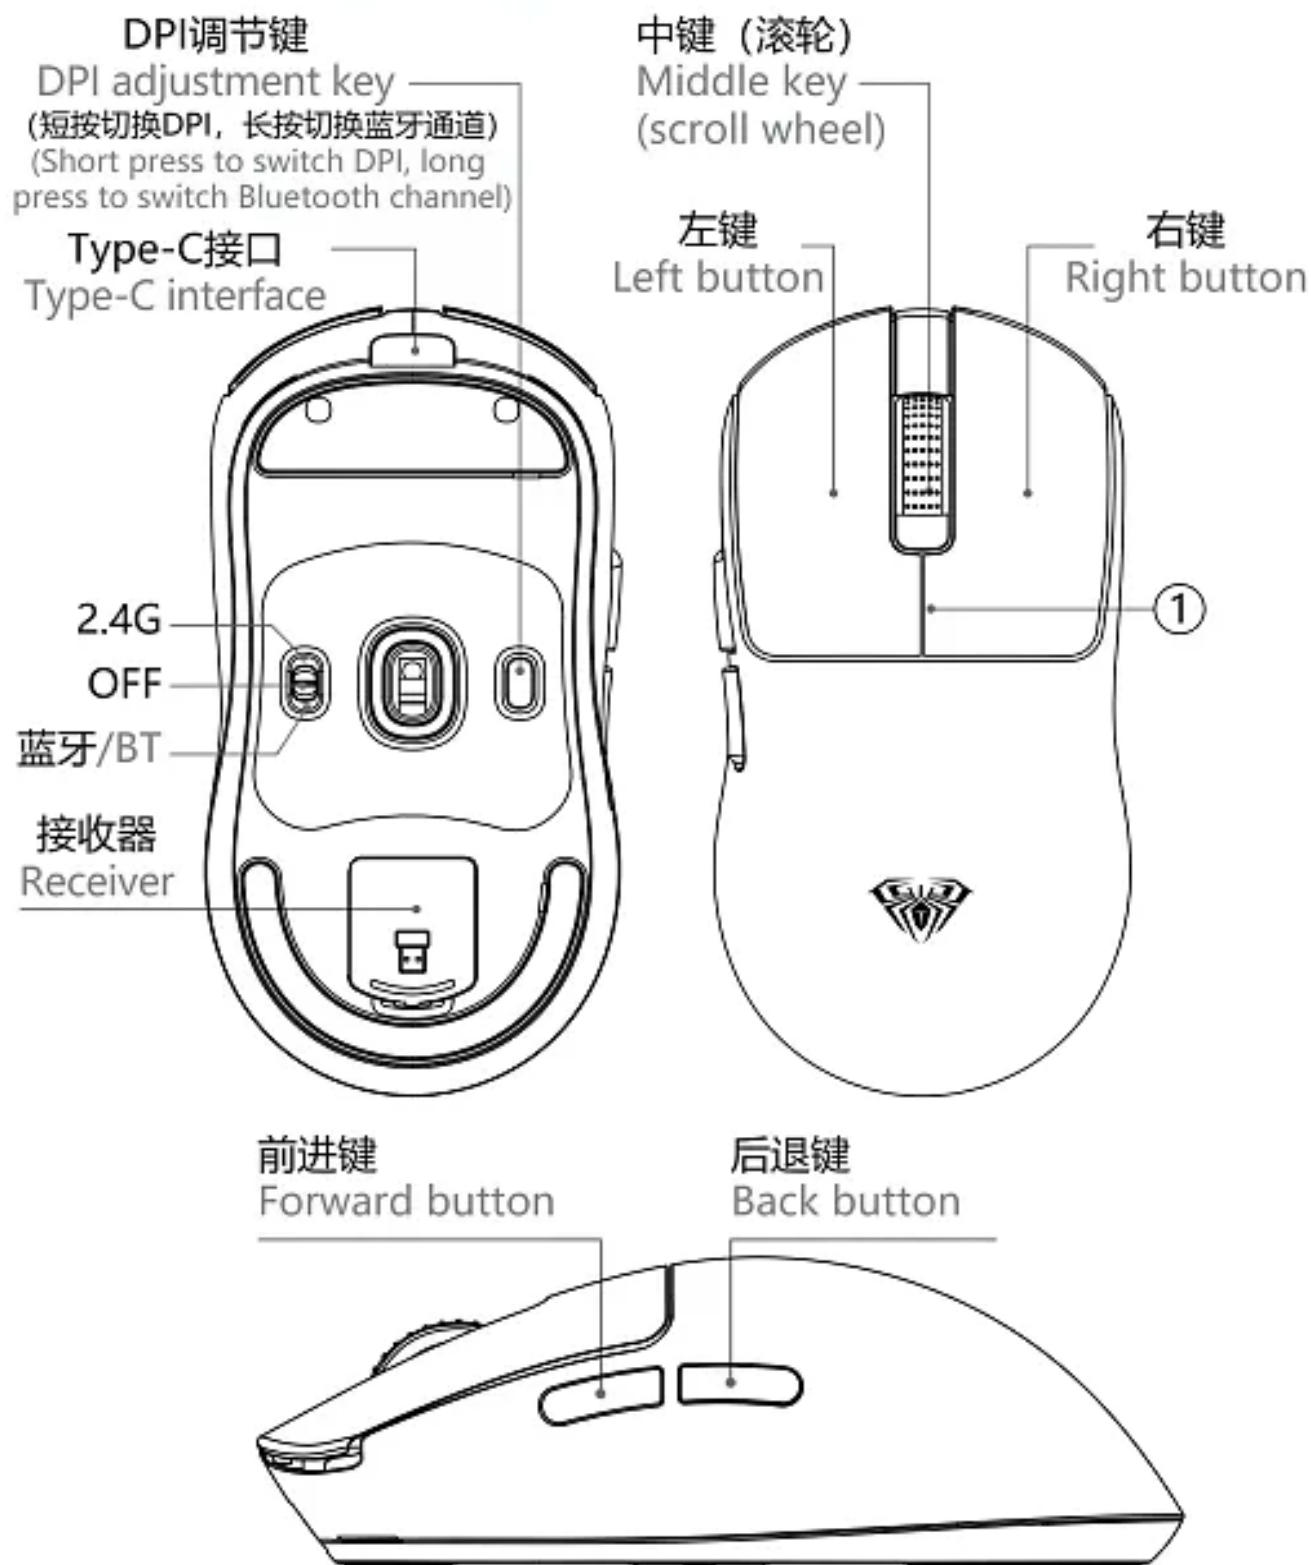

①DPI键调节6个灯效
DPI key adjusts 6 light effects



连接方式/Connection method

有线连接/Wired connection

- 将鼠标USB线插入电脑USB接口，数据线Type-C接口插入鼠标可直接使用。
Insert the USB cable of the mouse into the USB interface of the computer, and plug the Type-C interface of the data cable into the mouse for direct use.
- 在蓝牙/2.4G/关闭3段中有线优先使用。
Priority is given to wired use in BT/2.4G/with 3 segments turned off.

2.4G连接方式/2.4G connection method

- 将2.4G接收器插入电脑，底部电源开关向上拨到2.4G状态，直接使用。
Insert the 2.4G receiver into the computer, turn up the bottom power switch to 2.4G mode, and connect it for use.
(如连接不上左中右同时按3秒指示灯快闪进行对码，SC360为黄灯，SC360SE为绿灯)
(If unable to connect, press the left, right, and right indicator lights for 3s to flash for code matching, SC360 will turn yellow and SC360SE will turn green.)

蓝牙连接方式/BT connection method

SC360:

- 将鼠标底部电源开关拨到蓝牙模式，指示灯蓝色灯闪烁进行蓝牙对码，搜索蓝牙名称 (AULA-SC360)进行电脑连接对码。
(蓝牙重新切换长按DPI 3秒切换)
Turn the power switch at the bottom of the mouse to BT mode, the blue indicator light flashes, and perform BT code matching. Search for the BT name (AULA-SC360)to connect to the computer for code matching.

SC360SE:

- 将鼠标底部电源开关拨到蓝牙模式，长按左中右按键，指示灯蓝色灯快速闪烁进行蓝牙对码。搜索蓝牙名称(AULA-SC360 SE)进行电脑连接对码。
Turn the power switch at the bottom of the mouse to BT mode, long press the left, middle, and right buttons, and the blue indicator light will flash rapidly for BT pairing. Search for BT name (AULA-SC360 SE) for computer connection code matching.



鼠标休眠说明/Mouse hibernation instructions

- 鼠标1分钟无动静，进入一级休眠，移动鼠标或按鼠标按键唤醒。
The mouse remains inactive for 1 minute and enters first level sleep mode. Move the mouse or press the mouse button to wake it up.
- SC360鼠标3分钟无动静，进入二级休眠，移动鼠标或按鼠标按键唤醒。
The SC360 mouse remains inactive for 3 minutes and enters second level sleep mode. Move the mouse or press the mouse button to wake it up.
- SC360SE鼠标6分钟无动静，进入二级休眠，移动鼠标或按鼠标按键唤醒。
The SC360SE mouse remains inactive for 6 minutes and enters second level sleep mode. Move the mouse or press the mouse button to wake it up.

注：电脑进入休眠状态时，鼠标立即进入深度休眠，需单击鼠标任意按键唤醒鼠标也同时唤醒电脑。

Note: When the computer enters sleep mode, the mouse immediately enters deep sleep mode. You need to click any button on the mouse to wake up the mouse and also wake up the computer.

电源管理/Connection method

- 鼠标3.4V以下电压指示灯闪烁红灯，3.2V以下停止工作，需进行充电。
The voltage indicator light of the mouse below 3.4V flashes red, and it stops working below 3.2V and needs to be charged.
- 将配备Type-C数据线插入鼠标，鼠标指示灯长亮红色指示灯。
Insert the Type-C data cable into the mouse, and the mouse indicator light will remain on in red.
- 充满时间大约3.5-4小时。充满后灯光恢复充电前模式。
The filling time is about 3.5-4 hours. After being fully charged, the light returns to the pre charging mode.

电脑系统需求/Computer system requirements

- 操作平台 Windows 2000/WIN XP/WIN7/WIN8/WIN10, 在Win95, Win98系统下。



Operating platform Windows 2000/WIN XP/WIN7/WIN8/WIN10, under Win95 and Win98 systems.

- 配置有USB 1.1或以上版本端口。

Equipped with USB 1.1 or above ports.

- **硬件连接**

Hardware connection

- 1、打开电脑电源。

Turn on the computer power.

- 2、将此鼠标配套的USB接收器或USB数据线连接至电脑的USB接口上。

Connect the USB receiver or USB data cable that comes with this mouse to the USB port of the computer.

- 3、电脑启动后即可开始使用鼠标。

After the computer starts up, you can start using the mouse.

- 4、电脑在使用中时，可随时拔出或插上USB接收器或USB数据线。

When the computer is in use, the USB receiver or USB data cable can be unplugged or plugged in at any time.

- 5、USB数据线接收器不建议同时插在同一台电脑上。

It is not recommended to plug the USB cable and receiver into the same computer at the same time.

  充电说明	1、建议仅使用电脑USB接口对鼠标进行充电； 2、请勿使用快充手机充电器对鼠标充电； 3、请勿使用劣质非标电源适配器对鼠标进行充电； 4、请勿使用过压过流电源适配器对鼠标进行充电； 5、充电时请远离高温设备； 6、长时间不使用时请关闭电源开关。 以上充电说明同样适用于其他带充电功能设备(键盘/鼠标/耳机/音箱等)
--	---

  Charge Explain	1、It is recommended to only use the computer USB interface to charge the mouse; 2、Do not use a fast charging mobile phone charger to charge the mouse; 3、Do not use inferior non-standard power adapters to charge the mouse; 4、Do not use an overvoltage and overcurrent power adapter to charge the mouse; 5、Please stay away from high-temperature equipment when charging; 6、Please turn off the power switch when not in use for a long time. Please turn off the power switch when not in use for a long time. The above charging instructions also apply to other devices with charging functions (keyboard/mouse/headphones/speakers, etc.)
--	---



产品规格/Product Specifications

- 鼠标尺寸: 119×62×40 ±0.2mm
Mouse size: 119×62×40 ±0.2mm
- 产品重量: 57.8g ±1g (SC360); 64.7±1g(SC360SE)
(裸机不含接收器重量)
Product weight: 57.8g ±1g (SC360); 64.7 ± 1g (SC360SE)
(Bare machine without receiver weight)
- 连接方式: 有线 / 2.4G / 蓝牙模式
Connection method: Wired / 2.4G / BT mode
- 额定电压: 有线5V / 无线3.7V
Rated voltage: Wired 5V / Wireless 3.7V
- 额定电流: 有线200mA / 无线9mA
Rated current: Wired 200mA/Wireless 9mA
- 充电电压 / 电流: DC5V === 230mA
Charging voltage / Current: DC5V === 230mA
- 充电接口: Type-C
Charging interface: Type-C
- **SC360电池容量: 500mAh**
SC360 Battery capacity: 500mAh
- **SC360SE电池容量: 800mAh**
SC360SE Battery capacity: 800mAh
- **SC360回报率: 125-250-500-1000hz(默认)**
SC360 return rate: 125-250-500-1000hz (Default)
- **SC360SE回报率: 125-250-500(默认)-1000hz**
SC360SE return rate: 125-250-500 (Default) -1000hz
- **SC360六档DPI调节: 1200-2400-3200-6600-9600-12000DPI**
SC360 six level DPI adjustment: 1200-2400-3200-6600-9600-12000DPI
- **SC360SE六档DPI调节: 800红-1600绿(默认)-2400蓝-3200紫-6400黄-10000青) DPI**
SC360SE six level DPI adjustment: 800 Red-1600 Green (Default)
-2400 Blue-3200 Purple-6400 Yellow
-10000 Green DPI



Commissioned :Shenzhen Suoai Electronics Co.,Ltd

委托方：深圳市索艾电子科技有限公司

Commissioned Party (Manufacturer) :Dongguan
Suoai Electronics Co.,Ltd

受委托方（制造商）：东莞市索艾电子科技有限公司

Suoai Industry Park,Huayu Street Changlong

Village Huangjiang Town Dongguan City

Guangdong Province.

广东省东莞市黄江镇长龙村华裕街 索艾产业园

客服电话：400-678-0255

0769-86911118

工作时间：08:00-12:00

13:30-17:30

周一至周五（法定节假日除外）

狼蛛新浪微博：weibo.com/aula

狼蛛腾讯微博：t.qq.com/aula2012

狼蛛官方网站：www.aulacn.com

执行标准号：GB/T26245-2010

MADE IN CHINA